



**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**



MICROWAVE CORPORATION

v01.0813



## GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER With Power Detector, 9 - 14 GHz

HMC1053

### Typical Applications


The HMC1053 is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios
- VSAT & SATCOM

### Features

+38 dBm Pout @ 26% PAE  
High Output IP3: +43 dBm  
High Gain: 34 dB  
DC Supply: +7V @ 2400 mA  
No External Matching Required  
Die Size: 3.47 x 3.46 x 0.1 mm

### Functional Diagram

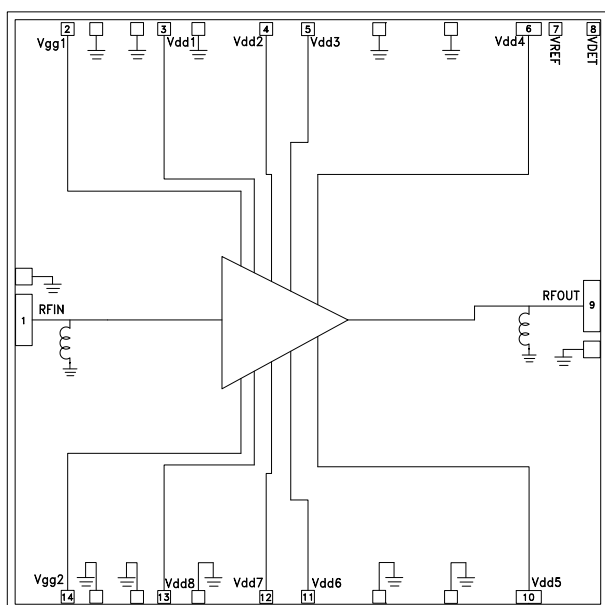

### General Description

The HMC1053 is a four-stage GaAs pHEMT MMIC 5 Watt Power Amplifier with an integrated temperature compensated on-chip Power Detector which operates between 9 and 14 GHz. The HMC1053 provides 34 dB of gain, +43 dBm output IP3 and +38 dBm of saturated output power at 26% PAE from a +7V power supply. The HMC1053 exhibits excellent linearity and is optimized for high capacity point-to-point and point-to-multi-point radio systems. The amplifier configuration and high gain make it an excellent candidate for last stage signal amplification preceding the antenna. All data is taken with the chip in a 50 Ohm test fixture connected via (2) 0.025 mm (1 mil) diameter wire bonds of 0.31 mm (12 mil) length.

### Electrical Specifications, $T_A = +25^\circ\text{C}$

$V_{dd} = V_{dd1}, V_{dd2}, V_{dd3}, V_{dd4}, V_{dd5}, V_{dd6}, V_{dd7}, V_{dd8} = +7V, I_{dd} = 2400\text{ mA}$  <sup>[1]</sup>

| Parameter   | Min.   | Typ.  | Max. | Min.    | Typ.  | Max. | Units |
|---|--------|-------|------|---------|-------|------|-------|
| Frequency Range                                   | 9 - 10 |       |      | 10 - 14 |       |      | GHz   |
| Gain  | 31     | 34    |      | 31      | 34    |      | dB    |
| Gain Variation Over Temperature                   |        | 0.047 |      |         | 0.040 |      | dB/°C |
| Input Return Loss                                 |        | 30    |      |         | 26    |      | dB    |
| Output Return Loss                                |        | 19    |      |         | 17    |      | dB    |
| Output Power for 1 dB Compression (P1dB)          | 32.5   | 35.5  |      | 33.5    | 36.5  |      | dBm   |
| Saturated Output Power (Psat)                     |        | 38    |      |         | 38.5  |      | dBm   |
| Output Third Order Intercept (IP3) <sup>[2]</sup> |        | 41    |      |         | 43    |      | dBm   |
| Total Supply Current (Idd)                        |        | 2400  |      |         | 2400  |      | mA    |

[1] Adjust Vgg1, Vgg2 between -2 to 0V to achieve Idd = 2400 mA typical.

[2] Measurement taken at +7V @ 2400 mA, Pout / Tone = +26 dBm

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)




## GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER With Power Detector, 9 - 14 GHz


### Broadband Gain & Return Loss vs. Frequency

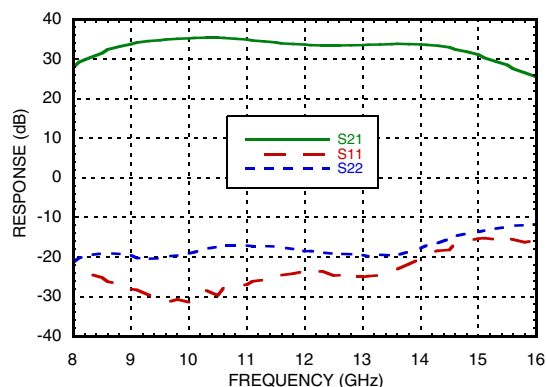


### Gain vs. Temperature

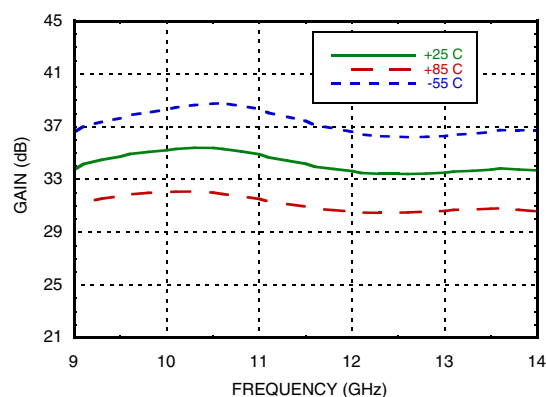


### Input Return Loss vs. Temperature

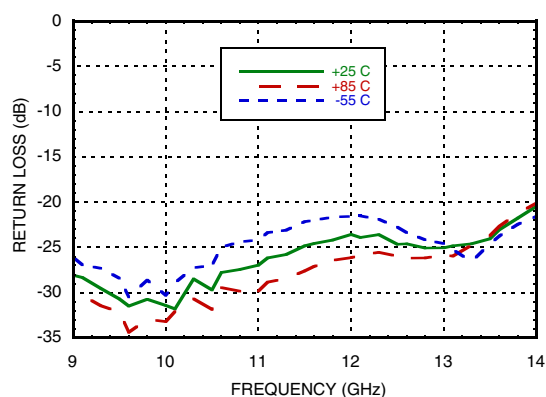


### Output Return Loss vs. Temperature

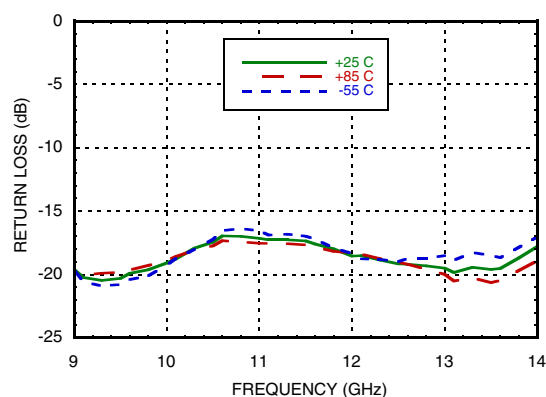

### P1dB vs. Temperature

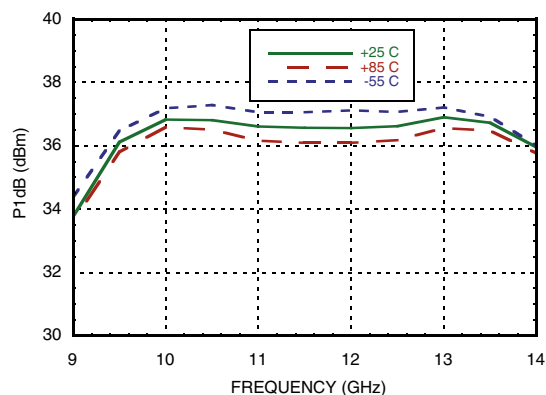


### P1dB vs. Supply Voltage

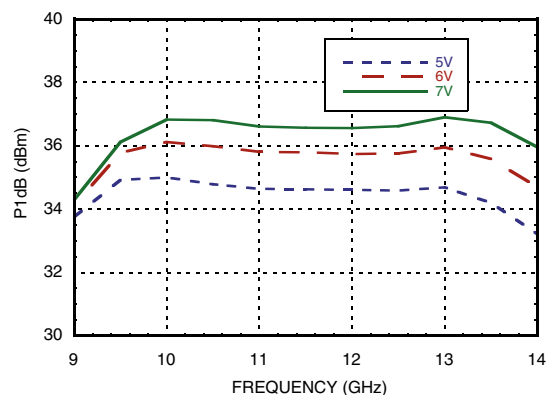




**GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER**  
**With Power Detector, 9 - 14 GHz**


**Psat vs. Temperature**

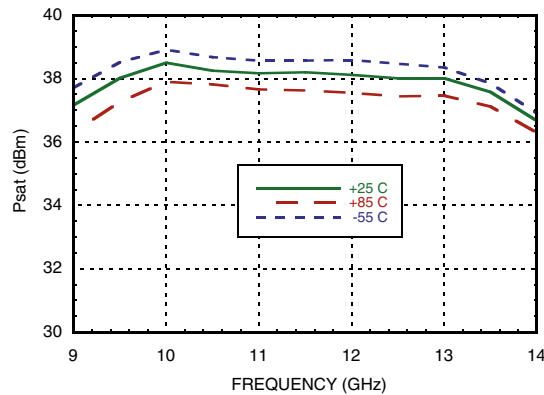


**Psat vs. Supply Voltage**

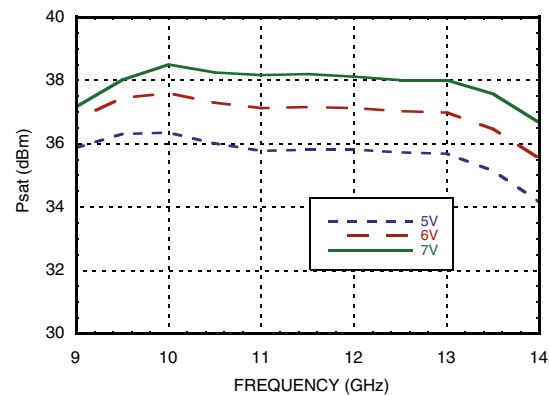


**P1dB vs. Supply Current (Idd)**

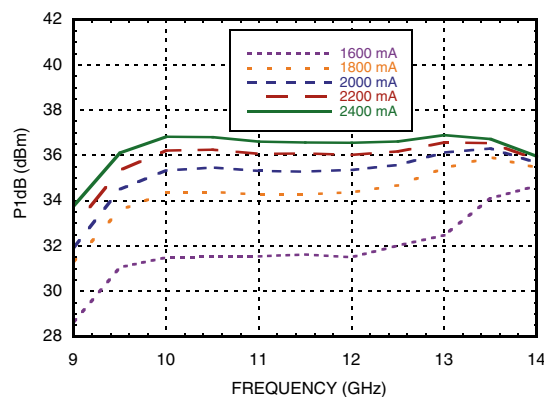


**Psat vs. Supply Current (Idd)**

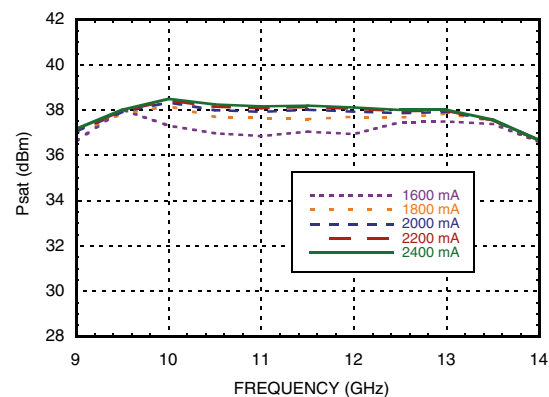

**Output IP3 vs. Temperature, Pout/Tone = +22 dBm**

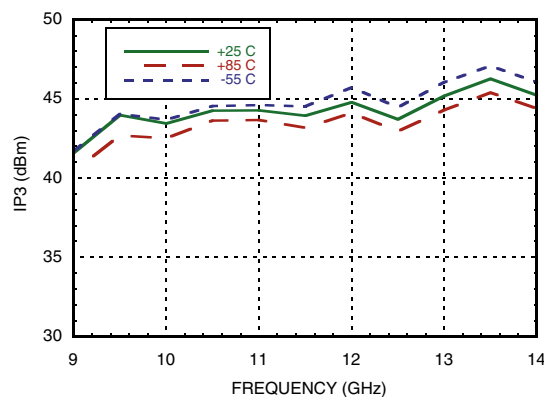


**Output IP3 vs. Supply Current, Pout/Tone = +22 dBm**

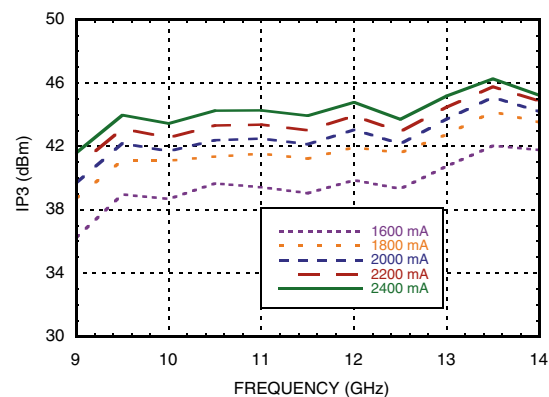




## GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER With Power Detector, 9 - 14 GHz


**Output IP3 vs.  
Supply Voltage, Pout/Tone = +22 dBm**

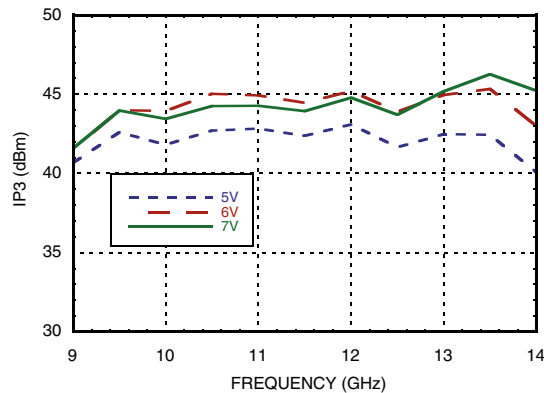


**Output IM3 @ Vdd = +5V**

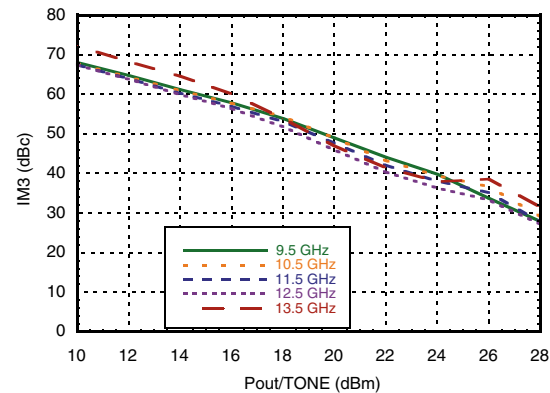


**Output IM3 @ Vdd = +6V**

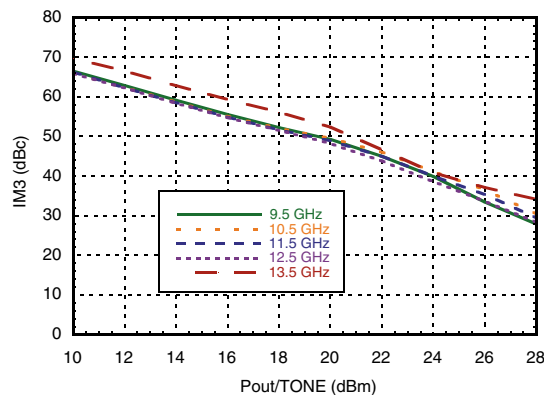


**Output IM3 @ Vdd = +7V**

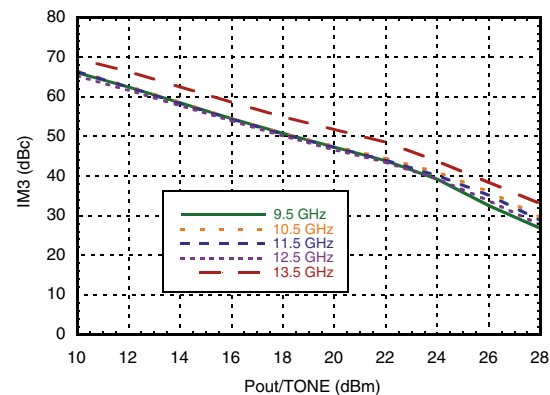

**Power Compression @ 11.5 GHz**

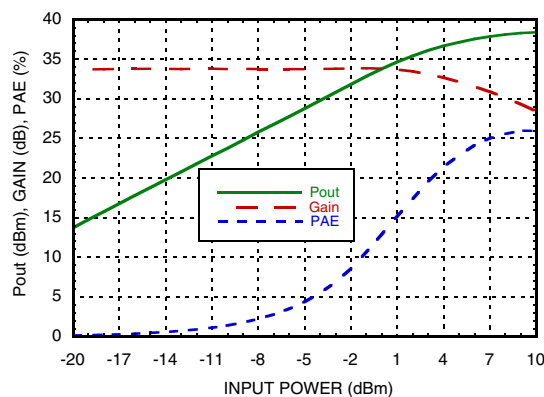

**Reverse Isolation vs. Temperature**

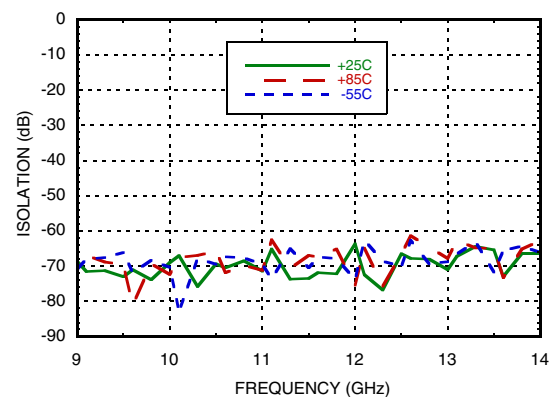



MICROWAVE CORPORATION


v01.0813

**HMC1053**




## GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER With Power Detector, 9 - 14 GHz


**Gain & Power vs.  
Supply Current @ 11.5 GHz**

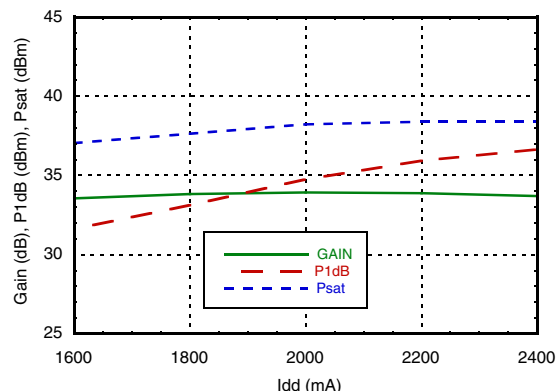


**Gain & Power vs.  
Supply Voltage @ 11.5 GHz**

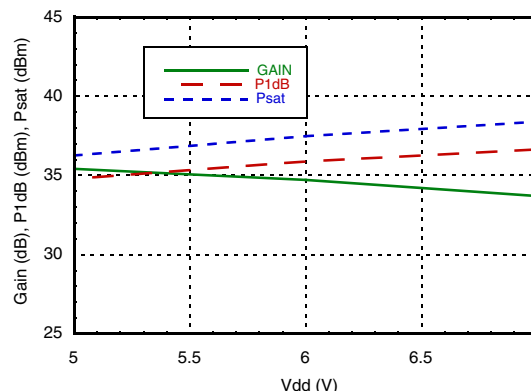

**Power Dissipation**

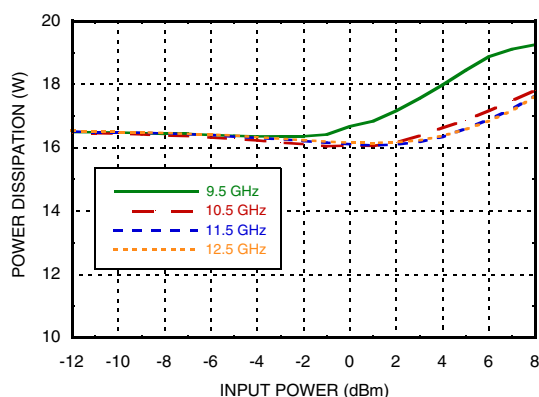

**Detector Voltage vs. Frequency &  
Temperature**

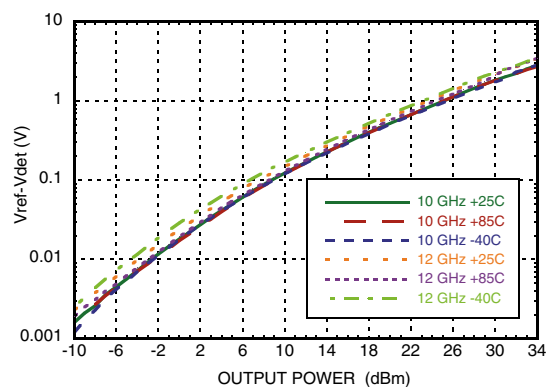

**Absolute Maximum Ratings**

|   |                |
|---|----------------|
| Drain Bias Voltage (Vdd)  | +8V            |
| RF Input Power (RFIN)   | +27 dBm        |
| Channel Temperature   | 150 °C         |
| Continuous P <sub>diss</sub> (T= 85 °C)<br>(derate 306 mW/°C above 85 °C) | 19.9 W         |
| Thermal Resistance<br>(channel to die bottom)                             | 3.27 °C/W      |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature   | -55 to +85 °C  |

**Typical Supply Current vs. Vdd**

| Vdd (V) | Idd (mA) |
|---------|----------|
| +5.0    | 2400     |
| +6.0    | 2400     |
| +7.0    | 2400     |

Note: Amplifier will operate over full voltage ranges shown above, V<sub>gg1</sub>, V<sub>gg2</sub> adjusted to achieve I<sub>dd</sub> = 2400 mA at +7V




**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**



# GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER With Power Detector, 9 - 14 GHz

## Outline Drawing

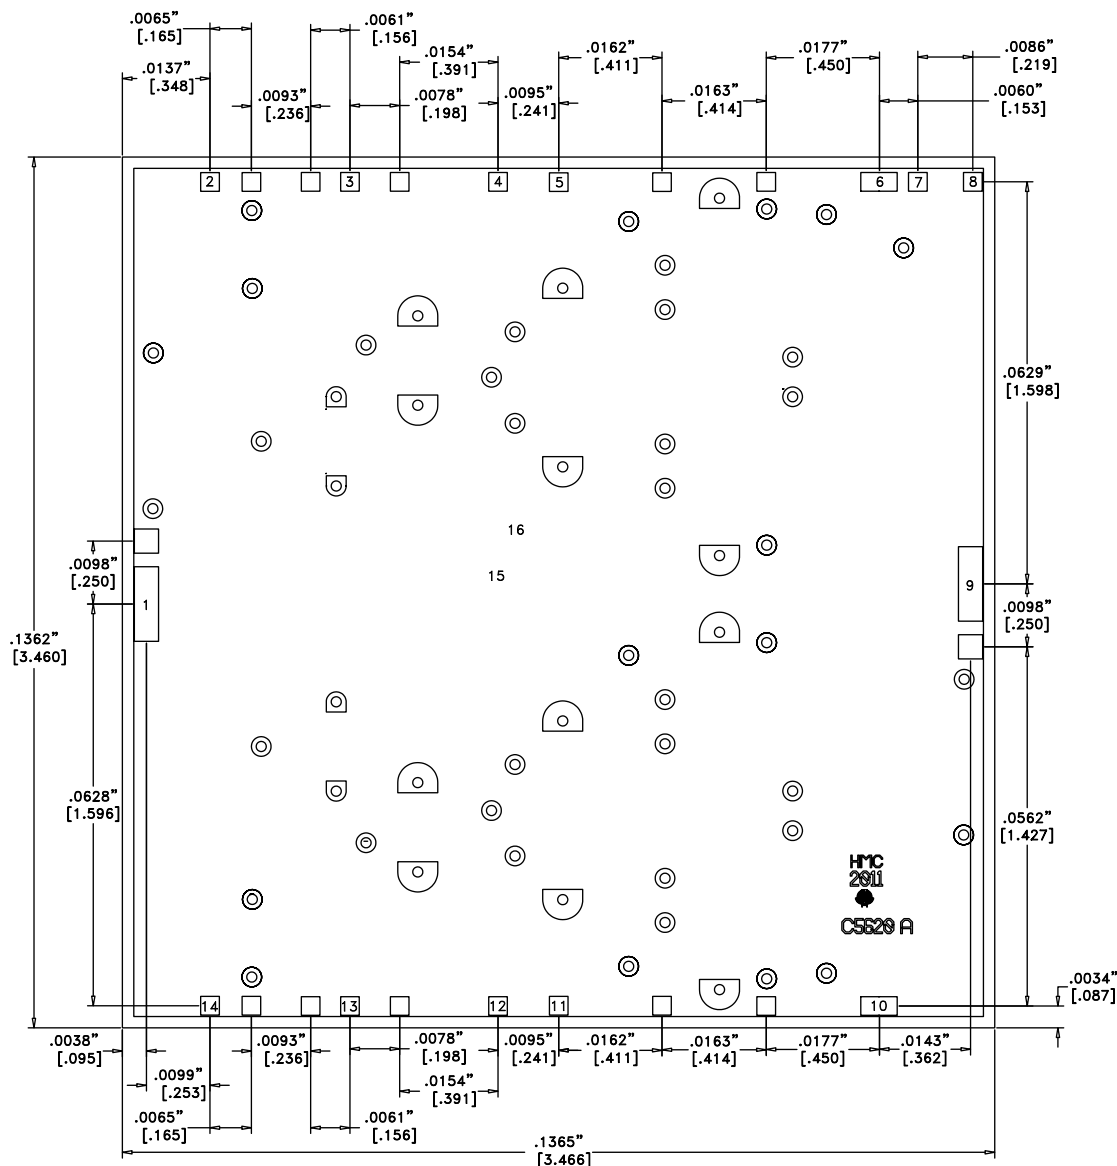

## Die Packaging Information <sup>[1]</sup>

| Standard        | Alternate      |
|-----------------|----------------|
| GP-1 (Gel Pack) | <sup>[2]</sup> |

[1] Refer to the "Packaging Information" section for die packaging dimensions.

[2] For alternate packaging information contact Hittite Microwave Corporation.

### NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM]
2. DIE THICKNESS IS .004"
3. TYPICAL BOND PAD IS .004" SQUARE
4. BACKSIDE METALLIZATION: GOLD
5. BOND PAD METALLIZATION: GOLD
6. BACKSIDE METAL IS GROUND.
7. CONNECTION NOT REQUIRED FOR UNLABELED BOND PADS.
8. OVERALL DIE SIZE  $\pm .002$





MICROWAVE CORPORATION

v01.0813

**HMC1053**

## GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER With Power Detector, 9 - 14 GHz


### Pad Descriptions

| Pad Number       | Function   | Description  | Interface Schematic |
|------------------|--|--|---------------------|
| 1                | RFIN   | This pad is DC coupled and matched to 50 Ohms over the operating frequency range.  |                     |
| 2                | Vgg1   | Gate control for amplifier, Vdd1 - Vdd4. External bypass capacitors of 100 pF, 0.01 $\mu$ F and 4.7 $\mu$ F are required.                        |                     |
| 3 - 6<br>10 - 13 | Vdd1, Vdd2,<br>Vdd3, Vdd4<br><br>Vdd5, Vdd6,<br>Vdd7, Vdd8 | Drain bias voltage for the amplifier. External bypass capacitors of 100 pF are required for each pad, followed by common 0.1 $\mu$ F capacitors. |                     |
| 7                | Vref   | DC voltage of diode biased through external resistor, used for temperature compensation of Vdet.   |                     |
| 8                | Vdet   | DC voltage representing RF output power rectified by diode which is biased through an external resistor.   |                     |
| 9                | RFOUT  | This pad is DC coupled and matched to 50 Ohms.   |                     |
| 14               | Vgg2   | Gate control for amplifier, Vdd5 - Vdd8. External bypass capacitors of 100 pF, 0.01 $\mu$ F and 4.7 $\mu$ F are required.                        |                     |
| Die Bottom       | GND  | Die bottom must be connected to RF/DC ground.  |                     |




## GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER With Power Detector, 9 - 14 GHz

### Application Circuit

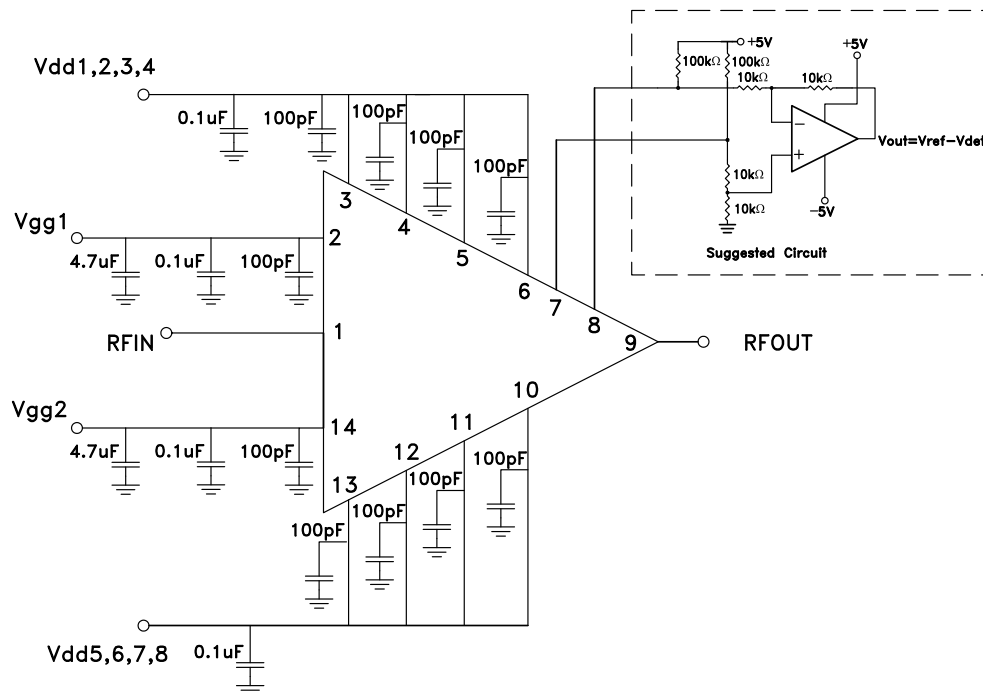

### Assembly Diagram

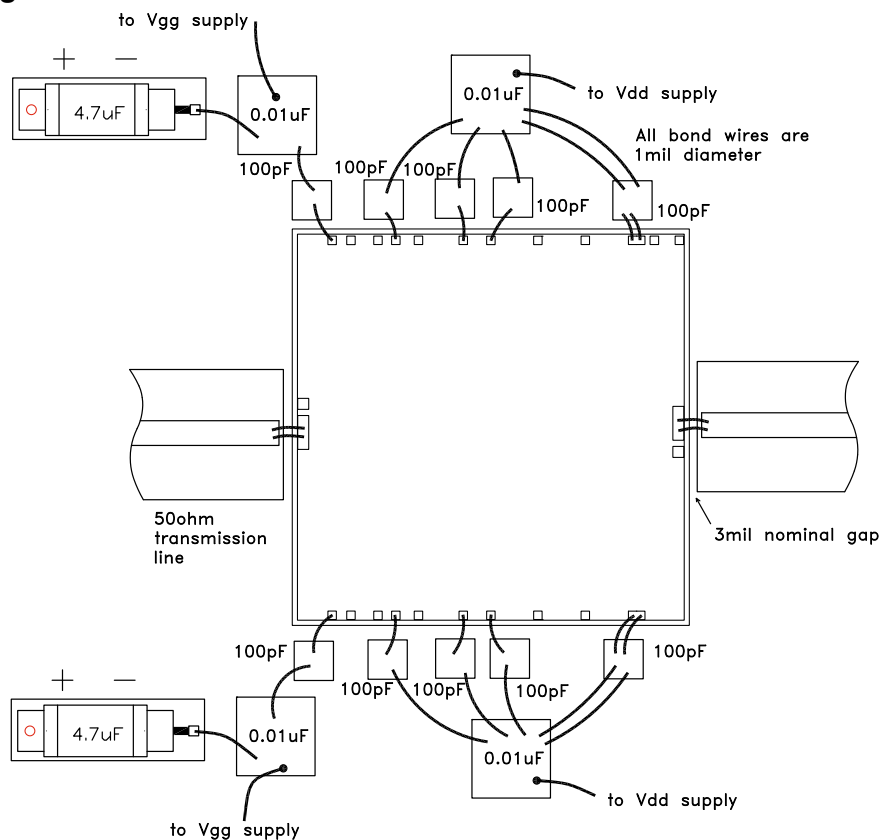



## GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER With Power Detector, 9 - 14 GHz

### Mounting & Bonding Techniques for Millimeterwave GaAs MMICs

The die should be attached directly to the ground plane eutectically or with conductive epoxy (see HMC general Handling, Mounting, Bonding Note).

50 Ohm Microstrip transmission lines on 0.127mm (5 mil) thick alumina thin film substrates are recommended for bringing RF to and from the chip (Figure 1). If 0.254mm (10 mil) thick alumina thin film substrates must be used, the die should be raised 0.150mm (6 mils) so that the surface of the die is coplanar with the surface of the substrate. One way to accomplish this is to attach the 0.102mm (4 mil) thick die to a 0.150mm (6 mil) thick molybdenum heat spreader (moly-tab) which is then attached to the ground plane (Figure 2).

Microstrip substrates should be located as close to the die as possible in order to minimize bond wire length. Typical die-to-substrate spacing is 0.076mm to 0.152 mm (3 to 6 mils).

### Handling Precautions

Follow these precautions to avoid permanent damage.

**Storage:** All bare die are placed in either Waffle or Gel based ESD protective containers, and then sealed in an ESD protective bag for shipment. Once the sealed ESD protective bag has been opened, all die should be stored in a dry nitrogen environment.

**Cleanliness:** Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.

**Static Sensitivity:** Follow ESD precautions to protect against  $> \pm 250V$  ESD strikes.

**Transients:** Suppress instrument and bias supply transients while bias is applied. Use shielded signal and bias cables to minimize inductive pick-up.

**General Handling:** Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip may have fragile air bridges and should not be touched with vacuum collet, tweezers, or fingers.

### Mounting



The chip is back-metallized and can be die mounted with AuSn eutectic preforms or with electrically conductive epoxy. The mounting surface should be clean and flat.

**Eutectic Die Attach:** A 80/20 gold tin preform is recommended with a work surface temperature of 255 °C and a tool temperature of 265 °C. When hot 90/10 nitrogen/hydrogen gas is applied, tool tip temperature should be 290 °C. DO NOT expose the chip to a temperature greater than 320 °C for more than 20 seconds. No more than 3 seconds of scrubbing should be required for attachment.

**Epoxy Die Attach:** Apply a minimum amount of epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip once it is placed into position. Cure epoxy per the manufacturer's schedule.

### Wire Bonding

Ball or wedge bond with 0.025mm (1 mil) diameter pure gold wire. Thermosonic wirebonding with a nominal stage temperature of 150 °C and a ball bonding force of 40 to 50 grams or wedge bonding force of 18 to 22 grams is recommended. Use the minimum level of ultrasonic energy to achieve reliable wirebonds. Wirebonds should be started on the chip and terminated on the package or substrate. All bonds should be as short as possible  $< 0.31mm$  (12 mils).

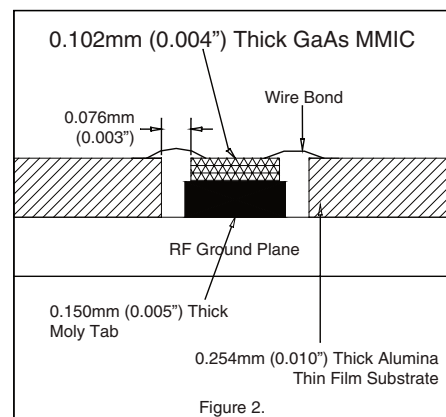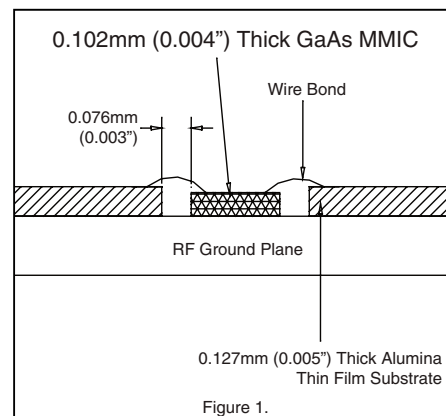



## **GaAs pHEMT MMIC 5 WATT POWER AMPLIFIER** **With Power Detector, 9 - 14 GHz**

### **Notes:**

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
Email      amall@ameya360.com  
QQ         800077892  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email      service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
Email      mkt@ameya360.com