

Power MOSFET Stage for Boost Converters



Module for Power Factor Correction

$$I_{D25} = 35 \text{ A}$$

$$V_{DSS} = 500 \text{ V}$$

$$R_{DS(on)} = 0.12 \Omega$$

V_{RRM} (Diode)	V_{DSS}	Type
V	V	
600	500	VUM 24-05N



Symbol	Conditions	Maximum Ratings	
V_{DSS}	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C	500	V
V_{DGR}	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C ; $R_{GS} = 10 \text{ k}\Omega$	500	V
V_{GS}	Continuous	± 20	V
I_D	$T_S = 85^{\circ}\text{C}$	24	A
I_D	$T_S = 25^{\circ}\text{C}$	35	A
I_{DM}	$T_S = 25^{\circ}\text{C}$, $t_p = ①$	95	A
P_D	$T_S = 85^{\circ}\text{C}$	170	W
I_S	$V_{GS} = 0 \text{ V}$, $T_S = 25^{\circ}\text{C}$	24	A
I_{SM}	$V_{GS} = 0 \text{ V}$, $T_S = 25^{\circ}\text{C}$, $t_p = ①$	95	A
V_{RRM}	$T_S = 85^{\circ}\text{C}$, rectangular $\delta = 0.5$	600	V
I_{dAV}		40	A
I_{FSM}			
Boost Diode	$T_{VJ} = 45^{\circ}\text{C}$, $t = 10 \text{ ms}$ (50 Hz)	300	A
	$t = 8.3 \text{ ms}$ (60 Hz)	320	A
	$T_{VJ} = 150^{\circ}\text{C}$, $t = 10 \text{ ms}$ (50 Hz)	260	A
	$t = 8.3 \text{ ms}$ (60 Hz)	280	A
P	$T_S = 85^{\circ}\text{C}$	36	W
V_{RRM}	$T_S = 85^{\circ}\text{C}$, sinus 180°	800	V
I_{dAV}		40	A
I_{FSM}			
Rectifier Diodes	$T_{VJ} = 45^{\circ}\text{C}$, $t = 10 \text{ ms}$ (50 Hz)	300	A
	$t = 8.3 \text{ ms}$ (60 Hz)	320	A
	$T_{VJ} = 150^{\circ}\text{C}$, $t = 10 \text{ ms}$ (50 Hz)	260	A
	$t = 8.3 \text{ ms}$ (60 Hz)	280	A
P	$T_S = 85^{\circ}\text{C}$	33	W
T_{VJ}	Module	-40...+150	$^{\circ}\text{C}$
T_{JM}		150	$^{\circ}\text{C}$
T_{stg}		-40...+150	$^{\circ}\text{C}$
V_{ISOL}	50/60 Hz $t = 1 \text{ min}$	3000	V~
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3600	V~
M_d	Mounting torque (M5)	2-2.5/18-22	Nm/lb.in.
Weight		28	g

① Pulse width limited by T_{VJ}

Features

- Package with DCB ceramic base plate
- Soldering connections for PCB mounting
- Isolation voltage 3600 V~
- Low $R_{DS(on)}$ HDMOS™ process
- Low package inductance for high speed switching
- Ultrafast boost diode
- Kelvin source for easy drive

Applications

- Power factor pre-conditioner for SMPS, UPS, battery chargers and inverters
- Boost topology for SMPS including 1~ rectifier bridge
- Power supply for welding equipment

Advantages

- 3 functions in one package
- Output power up to 5 kW
- No external isolation
- Easy to mount with two screws
- Suitable for wave soldering
- High temperature and power cycling capability
- Fits easily to all available PFC controller ICs

Symbol	Conditions	Characteristic Values			
		(T _{VJ} = 25°C, unless otherwise specified)			
		min.	typ.	max.	
V _{DSS}	MOSFET	V _{GS} = 0 V, I _D = 2 mA	500		V
V _{GS(th)}		V _{DS} = 20 V, I _D = 20 mA	2		5 V
I _{GSS}		V _{GS} = ±20 V, V _{DS} = 0 V			±500 nA
I _{DSS}		V _{DS} = 500 V, V _{GS} = 0 V			2 mA
R _{DS(on)}		T _{VJ} = 25°C			0.12 Ω
R _{Gint}		T _{VJ} = 25°C			1.5 Ω
g _{fs}		V _{DS} = 15 V, I _{DS} = 12 A		30	S
V _{DS}		I _{DS} = 24 A, V _{GS} = 0 V			1.5 V
t _{d(on)}		} V _{DS} = 250 V, I _{DS} = 12 A, V _{GS} = 10 V Zgen. = 1 Ω, L-load			100 ns
t _{d(off)}					
C _{iss}	} V _{DS} = 25 V, f = 1 MHz, V _{GS} = 0 V		8.5	nF	
C _{oss}			0.9	nF	
C _{rss}			0.3	nF	
Q _g	V _{DS} = 250 V, I _D = 12 A, V _{GS} = 10 V with heat transfer paste		350	nC	
R _{thJH}				0.38	K/W
V _F	Boost Diode	I _F = 22 A; T _{VJ} = 25°C T _{VJ} = 150°C		1.65 V 1.4 V	
I _R		V _R = 600 V, T _{VJ} = 25°C V _R = 480 V, T _{VJ} = 25°C T _{VJ} = 125°C		1.5 mA 0.25 mA 7 mA	
V _{T0}		For power-loss calculations only		1.14 V	
r _T		T _{VJ} = 125°C		10 mΩ	
I _{RM}		I _F = 30 A; -di _F /dt = 240 A/μs V _R = 350 V, T _{VJ} = 100°C	10	11 A	
R _{thJH}		with heat transfer paste		1.8 K/W	
V _F	Rectifier Diodes	I _F = 20 A, T _{VJ} = 25°C T _{VJ} = 125°C		1.4 V 1.4 V	
I _R		V _R = 800 V, T _{VJ} = 25°C V _R = 640 V, T _{VJ} = 125°C		0.25 mA 2 mA	
V _{T0}		For power-loss calculations only		1.05 V	
r _T		T _{VJ} = 125°C		16 mΩ	
R _{thJH}		with heat transfer paste		2 K/W	

Dimensions in mm (1 mm = 0.0394")

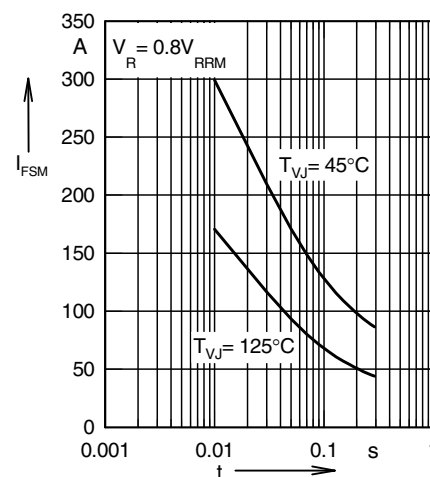


Fig. 1 Non-repetitive peak surge current (Rectifier Diodes)



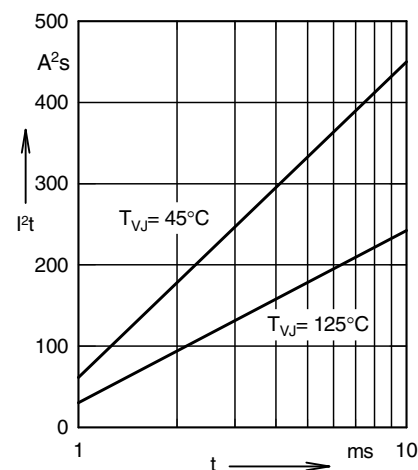


Fig. 2 I^2t for fusing (Rectifier Diodes)

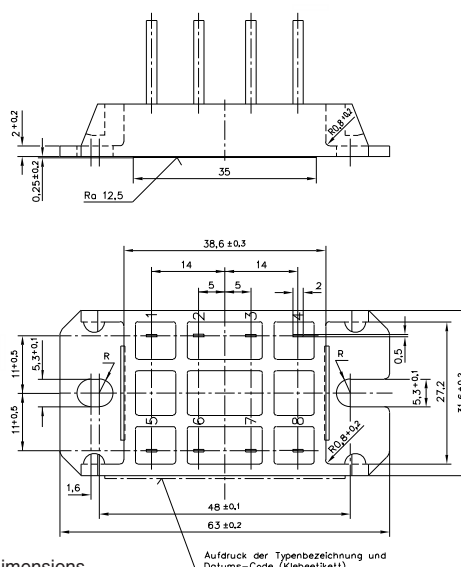

IXYS reserves the right to change limits, test conditions and dimensions

Aufdruck der Typenbezeichnung und
Datums-Code (Klebsteil)

Freimaßtoleranz: DIN ISO 2768 c

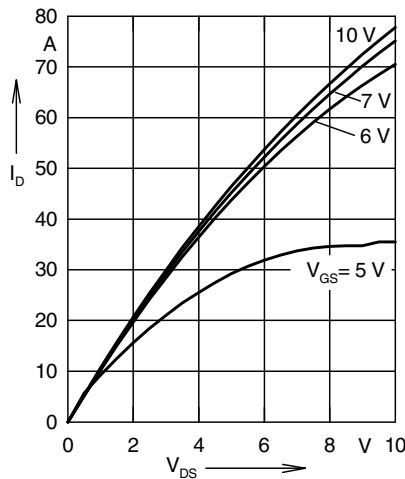


Fig. 3 Typ. output characteristic
 $I_D = f(V_{DS})$ (MOSFET)

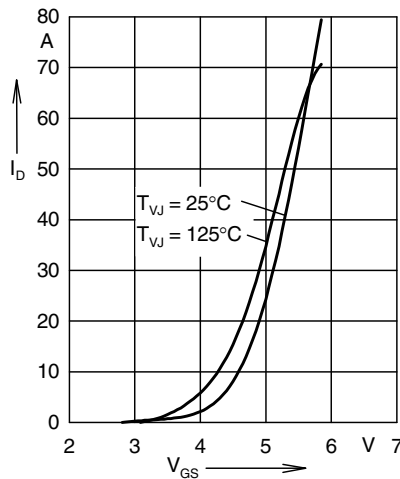


Fig. 4 Typ. transfer characteristics
 $I_D = f(V_{GS})$ (MOSFET)

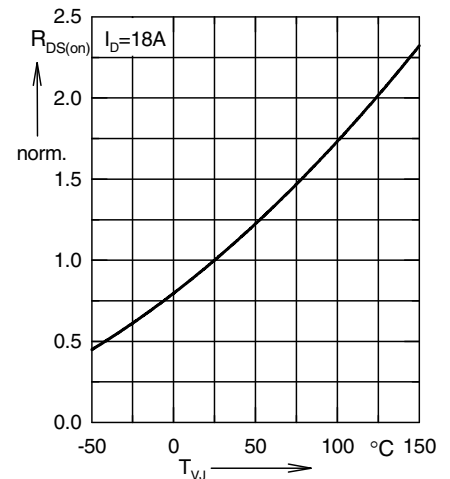


Fig. 5 Typ. normalized
 $R_{DS(on)} = f(T_{VJ})$ (MOSFET)

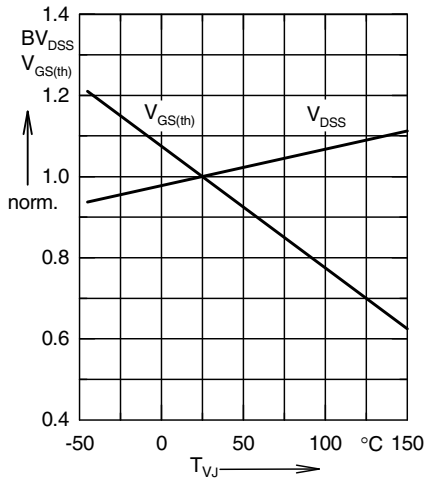


Fig. 6 Typ. normalized $BV_{DS(sat)} = f(T_{VJ})$
 $V_{GS(th)} = f(T_{VJ})$ (MOSFET)

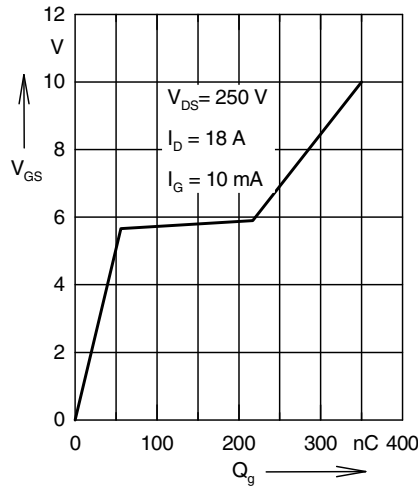


Fig. 7 Typ. turn-on gate charge
characteristics, $V_{GS} = f(Q_g)$ (MOSFET)

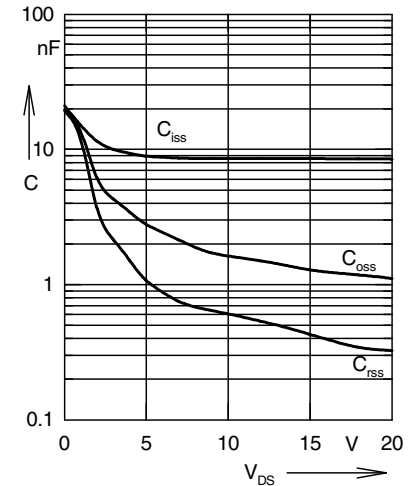


Fig. 8 Typ. capacitances $C = f(V_{DS})$,
 $f = 1 \text{ MHz}$ (MOSFET)

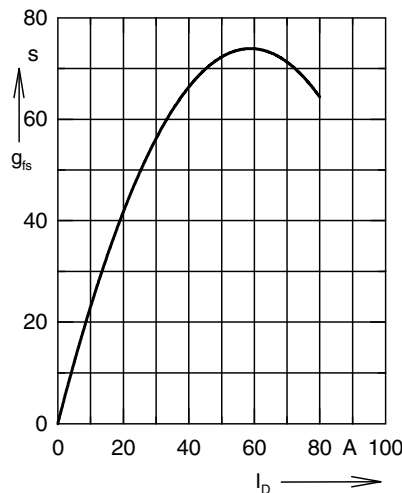


Fig. 9 Typ. transconductance,
 $g_{fs} = f(I_D)$ (MOSFET)

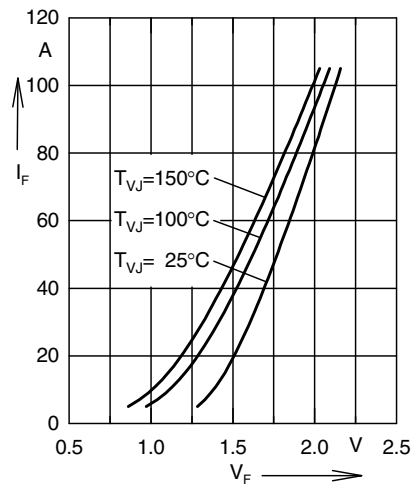


Fig. 10 Forward current versus
voltage drop (Boost Diode)

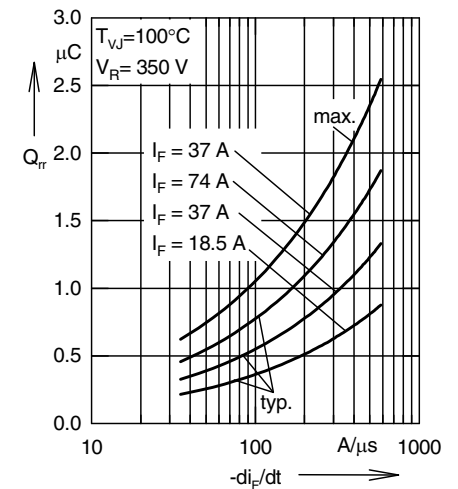


Fig. 11 Recovery charge versus $-di_F/dt$
(Boost Diode)

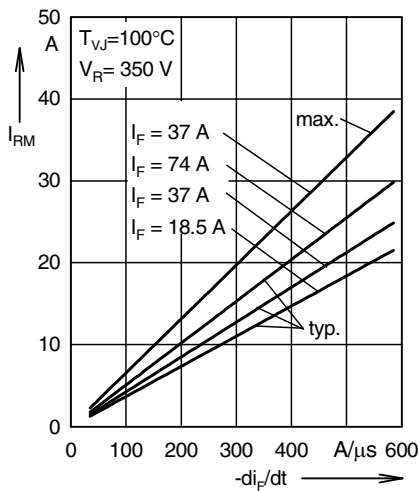


Fig. 12 Peak reverse current versus $-di_F/dt$ (Boost Diode)

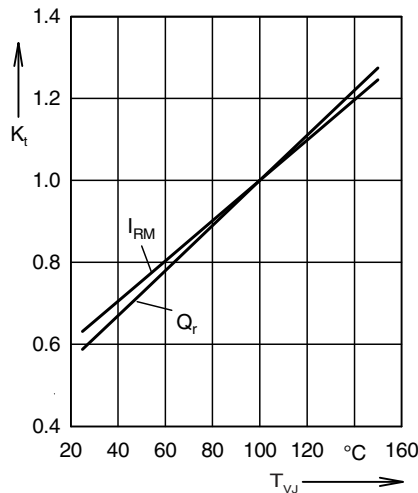


Fig. 13 Dynamic parameters versus junction temperature (Boost Diode)

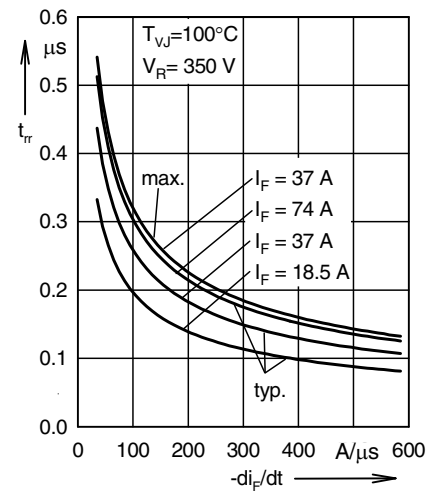


Fig. 14 Recovery time versus $-di_F/dt$ (Boost Diode)

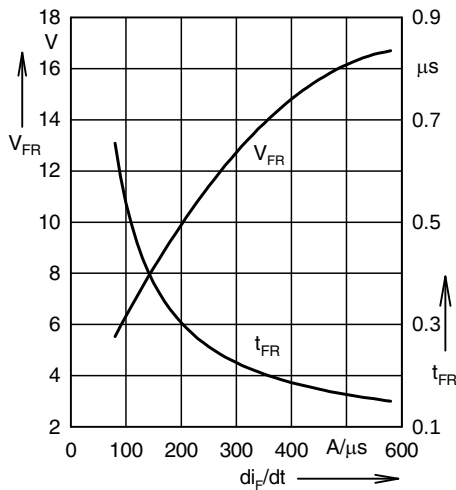


Fig. 15 Peak forward voltage versus di_F/dt (Boost Diode)

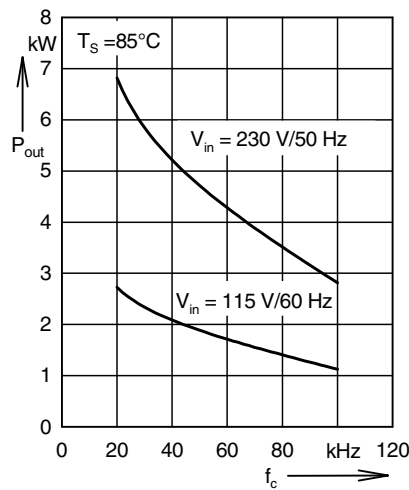


Fig. 16 Output power versus carrier frequency (Module)

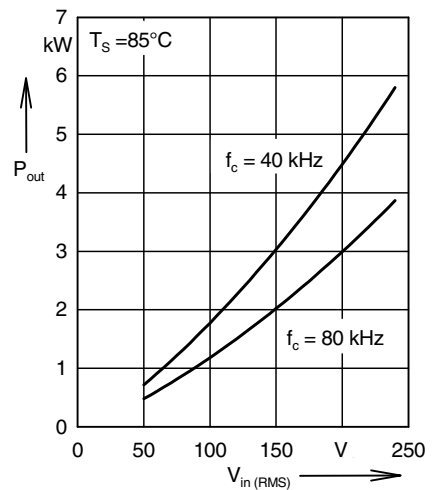


Fig. 17 Output power versus mains voltage

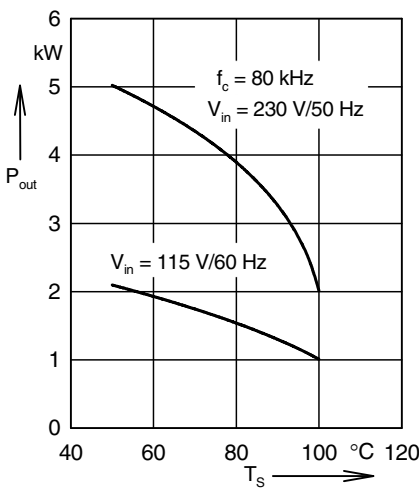


Fig. 18 Output power versus heatsink temperature (Module)

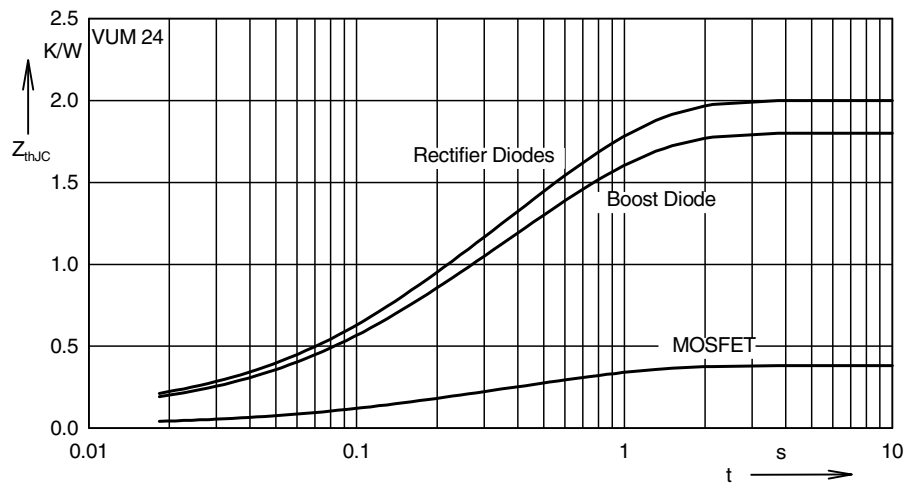


Fig. 19 Transient thermal impedance junction to case for all devices

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com