

LM613 Dual Operational Amplifiers, Dual Comparators, and Adjustable Reference

Check for Samples: [LM613](#)

FEATURES

OP AMP

- **Low Operating Current (Op Amp):** 300 μ A
- **Wide Supply Voltage Range:** 4V to 36V
- **Wide Common-Mode Range:** V^- to ($V^+ - 1.8V$)
- **Wide Differential Input Voltage:** $\pm 36V$
- **Available in Plastic Package Rated for Military Temp. Range Operation**

REFERENCE

- **Adjustable Output Voltage:** 1.2V to 6.3V
- **Tight Initial Tolerance Available:** $\pm 0.6\%$
- **Wide Operating Current Range:** 17 μ A to 20 mA
- **Tolerant of Load Capacitance**

APPLICATIONS

- **Transducer Bridge Driver**
- **Process and Mass Flow Control Systems**
- **Power Supply Voltage Monitor**
- **Buffered Voltage References for A/D's**

DESCRIPTION

The LM613 consists of dual op-amps, dual comparators, and a programmable voltage reference in a 16-pin package. The op-amps out-performs most single-supply op-amps by providing higher speed and bandwidth along with low supply current. This device was specifically designed to lower cost and board space requirements in transducer, test, measurement, and data acquisition systems.

Combining a stable voltage reference with wide output swing op-amps makes the LM613 ideal for single supply transducers, signal conditioning and bridge driving where large common-mode-signals are common. The voltage reference consists of a reliable band-gap design that maintains low dynamic output impedance (1 Ω typical), excellent initial tolerance (0.6%), and the ability to be programmed from 1.2V to 6.3V via two external resistors. The voltage reference is very stable even when driving large capacitive loads, as are commonly encountered in CMOS data acquisition systems.

As a member of TI's Super-Block™ family, the LM613 is a space-saving monolithic alternative to a multi-chip solution, offering a high level of integration without sacrificing performance.

Connection Diagrams

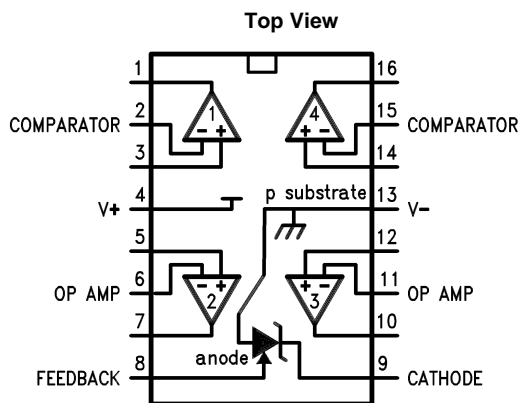


Figure 1. CDIP and SOIC Packages
See Package Numbers NFE0016A and DW0016B

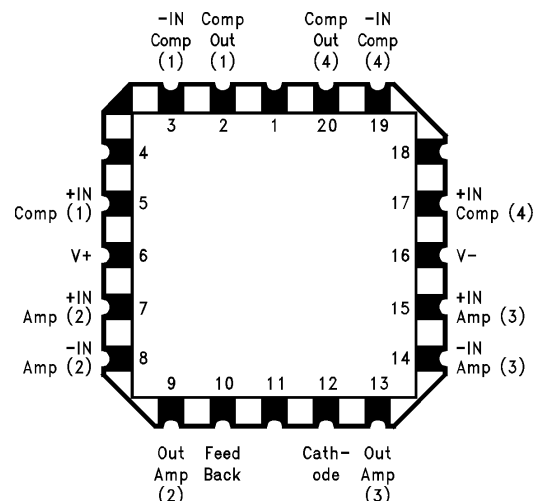


Figure 2. E Package Pinout




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Super-Block is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

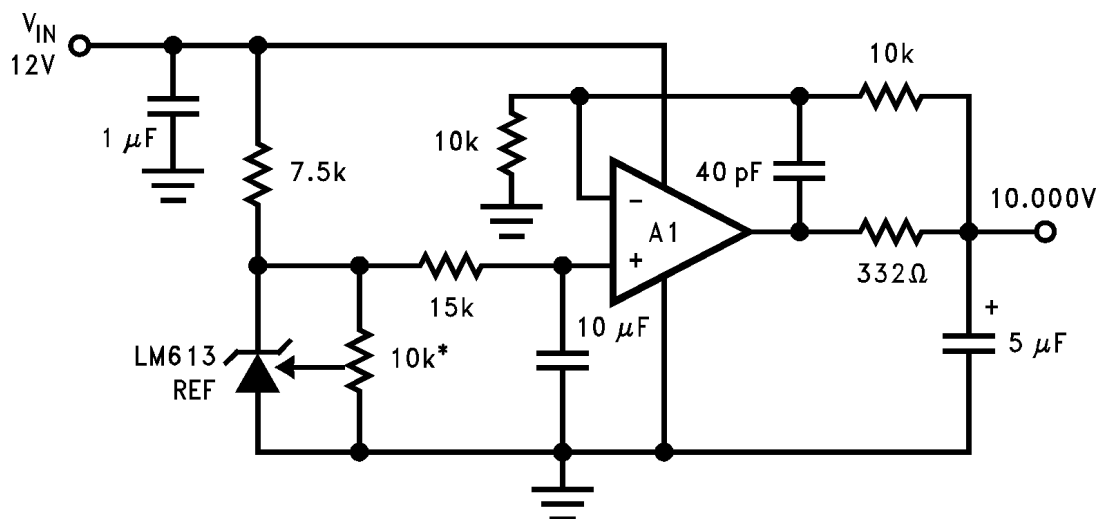

*10k must be low
t.c. trimpot

Figure 3. Ultra Low Noise, 10.00V Reference
Total Output Noise is Typically $14 \mu\text{V}_{\text{RMS}}$



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings⁽¹⁾⁽²⁾

Voltage on Any Pin Except V_R (referred to V^- pin)	See ⁽³⁾	36V (Max)
	See ⁽⁴⁾	–0.3V (Min)
Current through Any Input Pin & V_R Pin		±20 mA
Differential Input Voltage	Military and Industrial	±36V
	Commercial	±32V
Storage Temperature Range		–65°C ≤ T_J ≤ +150°C
Maximum Junction Temperature ⁽⁵⁾		150°C
Thermal Resistance, Junction-to-Ambient ⁽⁶⁾	N Package	100°C/W
	DW0016B Package	150°C/W
Soldering Information (10 Sec.)	N Package	260°C
	DW0016B Package	220°C
ESD Tolerance ⁽⁷⁾		±1 kV

- (1) Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device beyond its rated operating conditions.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (3) Input voltage above V^+ is allowed. As long as one input pin voltage remains inside the common-mode range, the comparator will deliver the correct output.
- (4) More accurately, it is excessive current flow, with resulting excess heating, that limits the voltages on all pins. When any pin is pulled a diode drop below V^- , a parasitic NPN transistor turns ON. No latch-up will occur as long as the current through that pin remains below the Maximum Rating. Operation is undefined and unpredictable when any parasitic diode or transistor is conducting.
- (5) Simultaneous short-circuit of multiple comparators while using high supply voltages may force junction temperature above maximum, and thus should not be continuous.
- (6) Junction temperature may be calculated using $T_J = T_A + P_D \theta_{JA}$. The given thermal resistance is worst-case for packages in sockets in still air. For packages soldered to copper-clad board with dissipation from one comparator or reference output transistor, nominal θ_{JA} is 90°C/W for the N package, and 135°C/W for the DW0016B package.
- (7) Human body model, 100 pF discharged through a 1.5 kΩ resistor.

Operating Temperature Range

LM613AI, LM613BI	–40°C to +85°C
LM613AM, LM613M	–55°C to +125°C
LM613C	0°C ≤ T_J ≤ +70°C

Electrical Characteristics

These specifications apply for $V^- = \text{GND} = 0\text{V}$, $V^+ = 5\text{V}$, $V_{\text{CM}} = V_{\text{OUT}} = 2.5\text{V}$, $I_{\text{R}} = 100\text{ }\mu\text{A}$, FEEDBACK pin shorted to GND, unless otherwise specified. Limits in standard typeface are for $T_{\text{J}} = 25^\circ\text{C}$; limits in **boldface type** apply over the **Operating Temperature Range**.

Parameter		Test Conditions	Typ ⁽¹⁾	LM613AM LM613AI Limits ⁽²⁾	LM613M LM613I LM613C Limits ⁽²⁾	Units
I _S	Total Supply Current	R _{LOAD} = ∞, 4V ≤ V ⁺ ≤ 36V (32V for LM613C)	450 550	940 1000	1000 1070	μA (Max) μA (Max)
V _S	Supply Voltage Range		2.2 2.9	2.8 3	2.8 3	V (Min) V (Min)
			46 43	36 36	32 32	V (Max) V (Max)
OPERATIONAL AMPLIFIERS						
V _{OS1}	V _{OS} Over Supply	4V ≤ V ⁺ ≤ 36V (4V ≤ V ⁺ ≤ 32V for LM613C)	1.5 2.0	3.5 6.0	5.0 7.0	mV (Max) mV (Max)
V _{OS2}	V _{OS} Over V _{CM}	V _{CM} = 0V through V _{CM} = (V ⁺ − 1.8V), V ⁺ = 30V, V [−] = 0V	1.0 1.5	3.5 6.0	5.0 7.0	mV (Max) mV (Max)
$\frac{V_{OS3}}{\Delta T}$	Average V _{OS} Drift	See ⁽²⁾	15			μV/°C (Max)
I _B	Input Bias Current		10 11	25 30	35 40	nA (Max) nA (Max)
I _{OS}	Input Offset Current		0.2 0.3	4 5	4 5	nA (Max) nA (Max)
$\frac{I_{OS1}}{\Delta T}$	Average Offset Current		4			pA/°C
R _{IN}	Input Resistance	Differential	1000			MΩ
C _{IN}	Input Capacitance	Common-Mode	6			pF
e _n	Voltage Noise	f = 100 Hz, Input Referred	74			nV/√Hz
I _n	Current Noise	f = 100 Hz, Input Referred	58			fA/√Hz
CMRR	Common-Mode Rejection Ratio	V ⁺ = 30V, 0V ≤ V _{CM} ≤ (V ⁺ − 1.8V) CMRR = 20 log (ΔV _{CM} /ΔV _{OS})	95 90	80 75	75 70	dB (Min) dB (Min)
PSRR	Power Supply Rejection Ratio	4V ≤ V ⁺ ≤ 30V, V _{CM} = V ⁺ /2, PSRR = 20 log (ΔV ⁺ /V _{OS})	110 100	80 75	75 70	dB (Min) dB (Min)
A _V	Open Loop Voltage Gain	R _L = 10 kΩ to GND, V ⁺ = 30V, 5V ≤ V _{OUT} ≤ 25V	500 50	100 40	94 40	V/mV (Min)
SR	Slew Rate	V ⁺ = 30V ⁽³⁾	0.70 0.65	0.55 0.45	0.50 0.45	V/μs
GBW	Gain Bandwidth	C _L = 50 pF	0.8 0.5			MHz MHz
V _{O1}	Output Voltage Swing High	R _L = 10 kΩ to GND, V ⁺ = 36V (32V for LM613C)	V ⁺ − 1.4 V ⁺ − 1.6	V ⁺ − 1.7 V ⁺ − 1.9	V ⁺ − 1.8 V ⁺ − 1.9	V (Min) V (Min)
V _{O2}	Output Voltage Swing Low	R _L = 10 kΩ to V ⁺ , V ⁺ = 36V (32V for LM613C)	V [−] + 0.8 V [−] + 0.9	V [−] + 0.9 V [−] + 1.0	V [−] + 0.95 V [−] + 1.0	V (Max) V (Max)
I _{OUT}	Output Source Current	V _{OUT} = 2.5V, V ⁺ _{IN} = 0V, V [−] _{IN} = −0.3V	25 15	20 13	16 13	mA (Min) mA (Min)
I _{SINK}	Output Sink Current	V _{OUT} = 1.6V, V ⁺ _{IN} = 0V, V [−] _{IN} = 0.3V	17 9	14 8	13 8	mA (Min) mA (Min)
I _{SHORT}	Short Circuit Current	V _{OUT} = 0V, V ⁺ _{IN} = 3V, V [−] _{IN} = 2V V _{OUT} = 5V, V ⁺ _{IN} = 2V, V [−] _{IN} = 3V	30 40	50 60	50 60	mA (Max) mA (Max)
			30 32	60 80	70 90	mA (Max) mA (Max)

(1) Typical values in standard typeface are for $T_{\text{J}} = 25^\circ\text{C}$; values in **bold face type** apply for the full operating temperature range. These values represent the most likely parametric norm.

(2) All limits are ensured at room temperature (standard type face) or at operating temperature extremes (**bold type face**).

(3) Slew rate is measured with the op amp in a voltage follower configuration. For rising slew rate, the input voltage is driven from 5V to 25V, and the output voltage transition is sampled at 10V and @ 20V. For falling slew rate, the input voltage is driven from 25V to 5V, and the output voltage transition is sampled at 20V and 10V.

Electrical Characteristics (continued)

These specifications apply for $V^- = \text{GND} = 0\text{V}$, $V^+ = 5\text{V}$, $V_{\text{CM}} = V_{\text{OUT}} = 2.5\text{V}$, $I_{\text{R}} = 100\text{ }\mu\text{A}$, FEEDBACK pin shorted to GND, unless otherwise specified. Limits in standard typeface are for $T_{\text{J}} = 25^\circ\text{C}$; limits in **boldface type** apply over the **Operating Temperature Range**.

Parameter		Test Conditions	Typ ⁽¹⁾	LM613AM LM613AI Limits ⁽²⁾	LM613M LM613I LM613C Limits ⁽²⁾	Units
COMPARATORS						
V _{OS}	Offset Voltage	4V ≤ V ⁺ ≤ 36V (32V for LM613C), R _L = 15 kΩ	1.0 2.0	3.0 6.0	5.0 7.0	mV (Max) mV (Max)
V _{OS} V _{CM}	Offset Voltage over V _{CM}	0V ≤ V _{CM} ≤ 36V V ⁺ = 36V, (32V for LM613C)	1.0 1.5	3.0 6.0	5.0 7.0	mV (Max) mV (Max)
V _{OS} ΔT	Average Offset Voltage Drift		15			μV/°C (Max)
I _B	Input Bias Current		5 8	25 30	35 40	nA (Max) nA (Max)
I _{OS}	Input Offset Current		0.2 0.3	4 5	4 5	nA (Max) nA (Max)
A _V	Voltage Gain	R _L = 10 kΩ to 36V (32V for LM613C) 2V ≤ V _{OUT} ≤ 27V	500 100			V/mV V/mV
t _r	Large Signal Response Time	V ⁺ _{IN} = 1.4V, V ⁻ _{IN} = TTL Swing, R _L = 5.1 kΩ	1.5 2.0			μs μs
I _{SINK}	Output Sink Current	V ⁺ _{IN} = 0V, V ⁻ _{IN} = 1V, V _{OUT} = 1.5V V _{OUT} = 0.4V	20 13	10 8	10 8	mA (Min) mA (Min)
			2.8 2.4	1.0 0.5	0.8 0.5	mA (Min) mA (Min)
I _{LEAK}	Output Leakage Current	V ⁺ _{IN} = 1V, V ⁻ _{IN} = 0V, V _{OUT} = 36V (32V for LM613C)	0.1 0.2	10	10	μA (Max) μA (Max)
VOLTAGE REFERENCE						
V _R	Voltage Reference	See ⁽⁴⁾	1.244	1.2365 1.2515 (±0.6%)	1.2191 1.2689 (±2%)	V (Min) V (Max)
ΔV _R ΔT	Average Temp. Drift	See ⁽⁵⁾	10	80	150	ppm/°C (Max)
ΔV _R ΔT _J	Hysteresis	See ⁽⁶⁾	3.2			μV/°C
ΔV _R ΔI _R	V _R Change with Current	V _R (100 μA) - V _R (17 μA)	0.05 0.1	1 1.1	1 1.1	mV (Max) mV (Max)
		V _R (10 mA) - V _R (100 μA) See ⁽⁷⁾	1.5 2.0	5 5.5	5 5.5	mV (Max) mV (Max)
R	Resistance	ΔV _R (10→0.1 mA)/9.9 mA	0.2 0.6	0.56 13	0.56 13	Ω (Max) Ω (Max)
		ΔV _R (100→17 μA)/83 μA				
V _R ΔV _{RO}	V _R Change with High V _{RO}	V _R (V _{ro} = V _I) - V _R (V _{ro} = 6.3V) (5.06V between Anode and FEEDBACK)	2.5 2.8	7 10	7 10	mV (Max) mV (Max)
V _R ΔV ⁺	V _R Change with V _{ANODE} Change	V _R (V ⁺ = 5V) - V _R (V ⁺ = 36V) (V ⁺ = 32V for LM613C)	0.1 0.1	1.2 1.3	1.2 1.3	mV (Max) mV (Max)
		V _R (V ⁺ = 5V) - V _R (V ⁺ = 3V)	0.01 0.01	1 1.5	1 1.5	mV (Max) mV (Max)
I _{FB}	FEEDBACK Bias Current	V _{ANODE} ≤ V _{FB} ≤ 5.06V	22 29	35 40	50 55	nA (Max) nA (Max)

(4) V_{R} is the Cathode-to-feedback voltage, nominally 1.244V.

(5) Average reference drift is calculated from the measurement of the reference voltage at 25°C and at the temperature extremes. The drift, in ppm/ $^\circ\text{C}$, is $10^6 \cdot \Delta V_{\text{R}} / (V_{\text{R}[25^\circ\text{C}]} \cdot \Delta T_{\text{J}})$, where ΔV_{R} is the lowest value subtracted from the highest, $V_{\text{R}[25^\circ\text{C}]}$ is the value at 25°C , and ΔT_{J} is the temperature range. This parameter is ensured by design and sample testing.

(6) Hysteresis is the change in V_{R} caused by a change in T_{J} , after the reference has been "dehysteresized". To dehysteresize the reference; that is minimize the hysteresis to the typical value, its junction temperature should be cycled in the following pattern, spiraling in toward 25°C : 25°C , 85°C , -40°C , 70°C , 0°C , 25°C .

(7) Low contact resistance is required for accurate measurement.

Electrical Characteristics (continued)

These specifications apply for $V^- = \text{GND} = 0\text{V}$, $V^+ = 5\text{V}$, $V_{\text{CM}} = V_{\text{OUT}} = 2.5\text{V}$, $I_{\text{R}} = 100\text{ }\mu\text{A}$, FEEDBACK pin shorted to GND, unless otherwise specified. Limits in standard typeface are for $T_{\text{J}} = 25^\circ\text{C}$; limits in **boldface type** apply over the **Operating Temperature Range**.

Parameter		Test Conditions	Typ ⁽¹⁾	LM613AM LM613AI Limits ⁽²⁾	LM613M LM613I LM613C Limits ⁽²⁾	Units
e_n	V_{R} Noise	10 Hz to 10 kHz, $V_{\text{RO}} = V_{\text{R}}$	30			μV_{RMS}

Simplified Schematic Diagrams

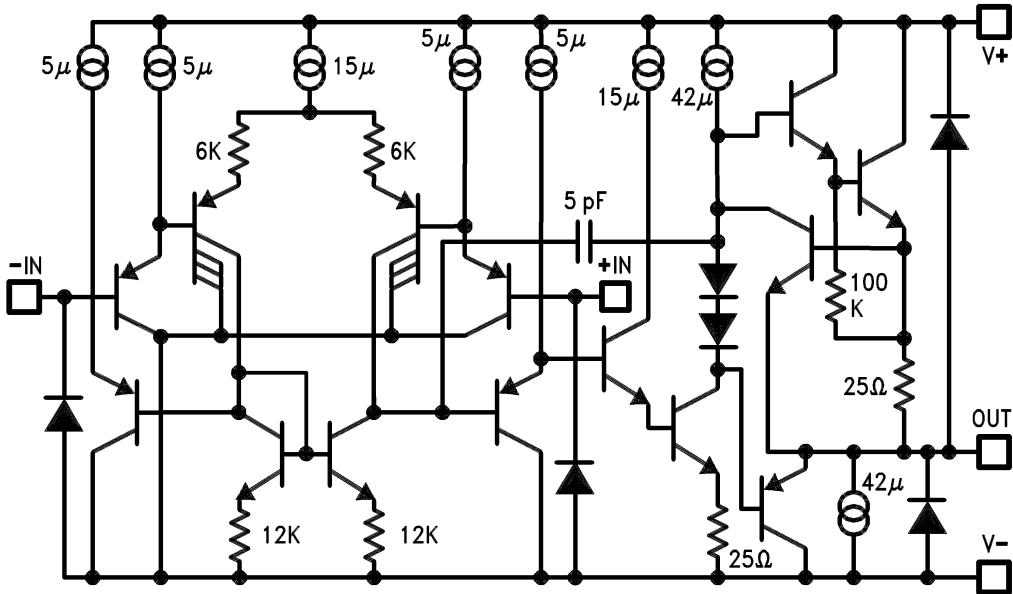


Figure 4. Op Amp

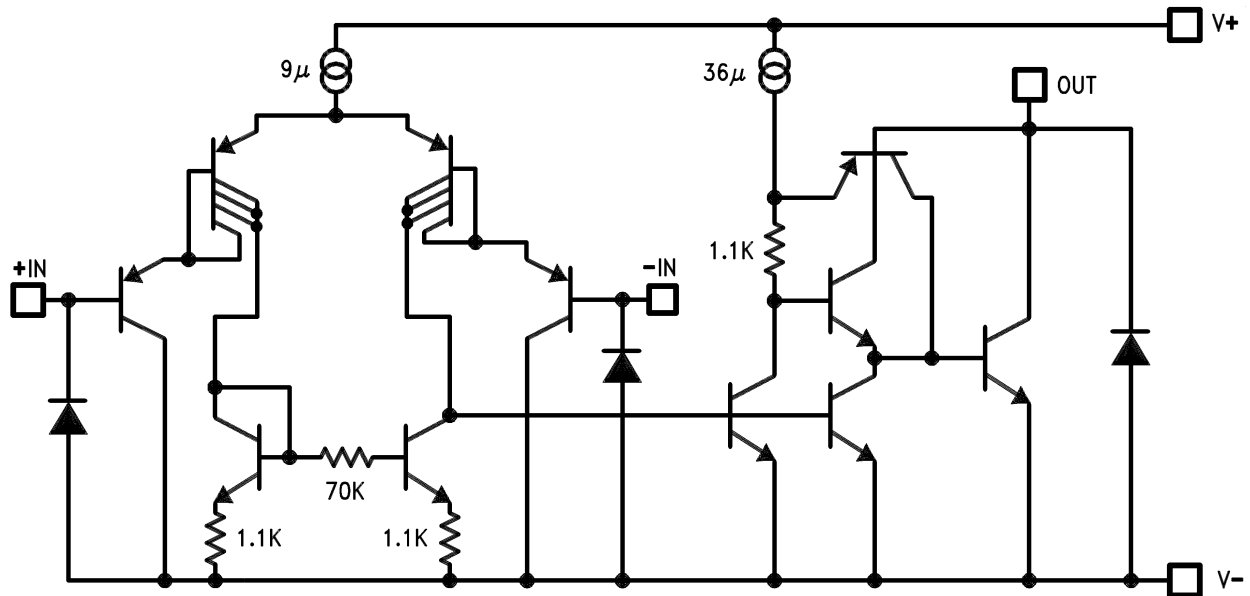


Figure 5. Comparator

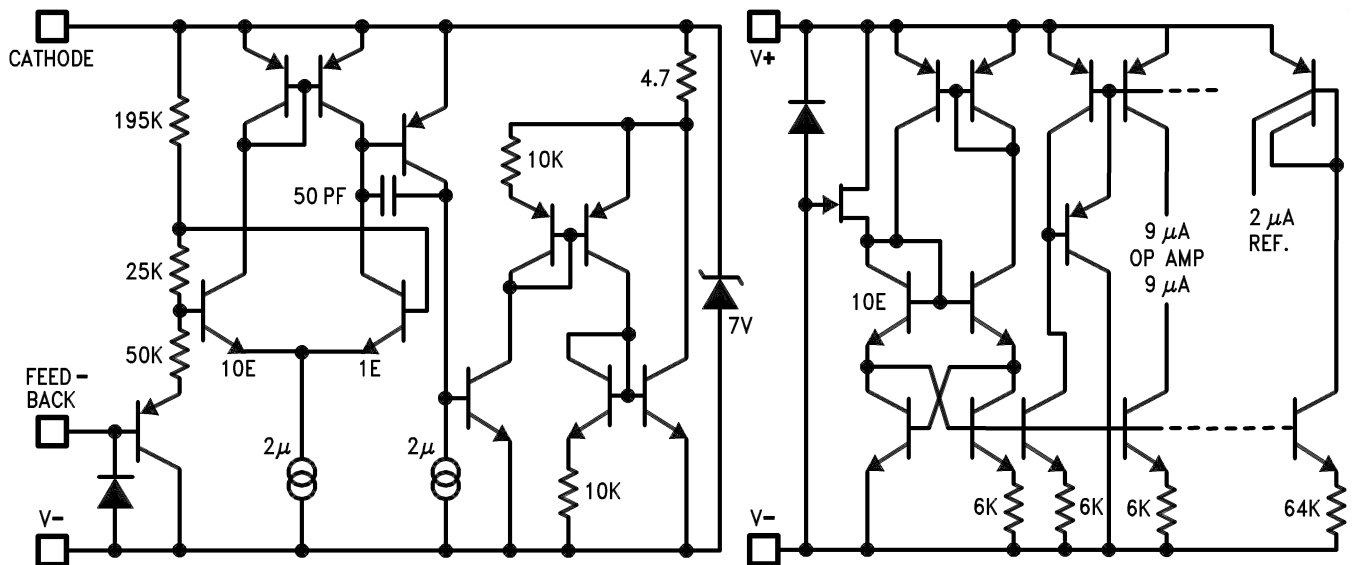


Figure 6. Reference/Bias

TYPICAL PERFORMANCE CHARACTERISTICS (Reference)

$T_J = 25^\circ\text{C}$, FEEDBACK pin shorted to $V^- = 0\text{V}$, unless otherwise noted

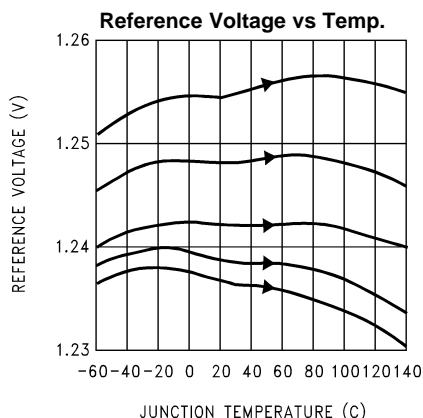


Figure 7.

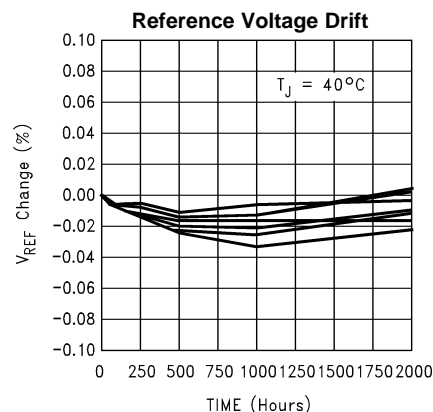


Figure 8.

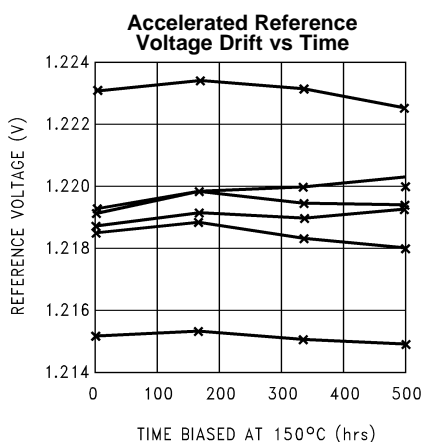


Figure 9.

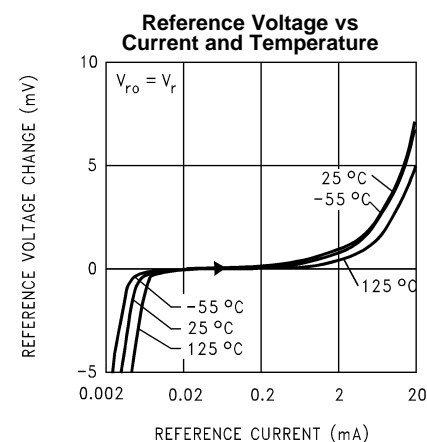


Figure 10.

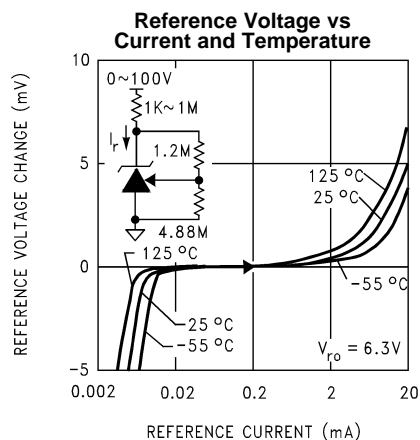


Figure 11.

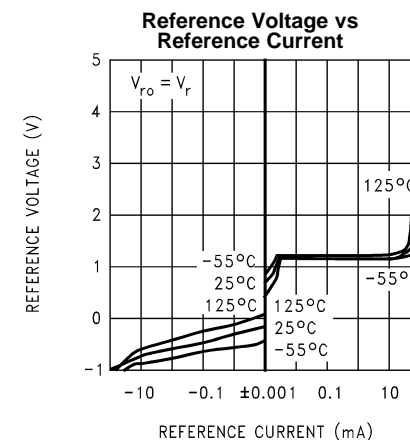


Figure 12.

TYPICAL PERFORMANCE CHARACTERISTICS (Reference) (continued)

$T_J = 25^\circ\text{C}$, FEEDBACK pin shorted to $V^- = 0\text{V}$, unless otherwise noted

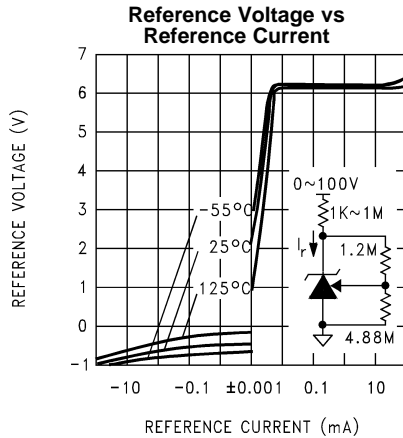


Figure 13.

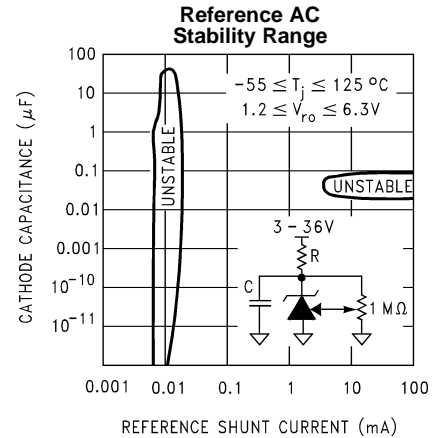


Figure 14.

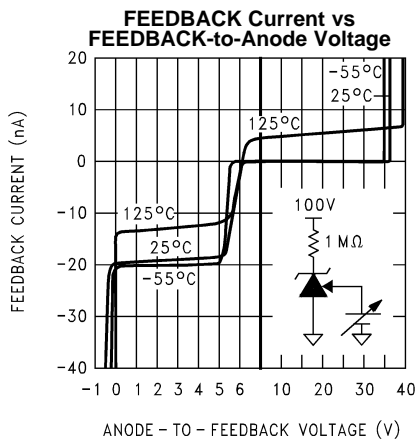


Figure 15.

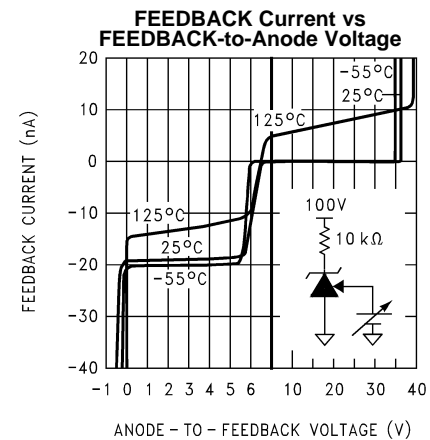


Figure 16.

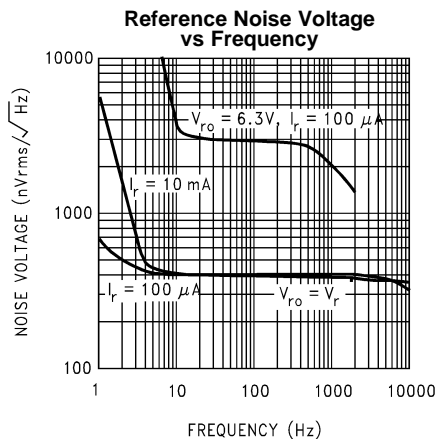


Figure 17.

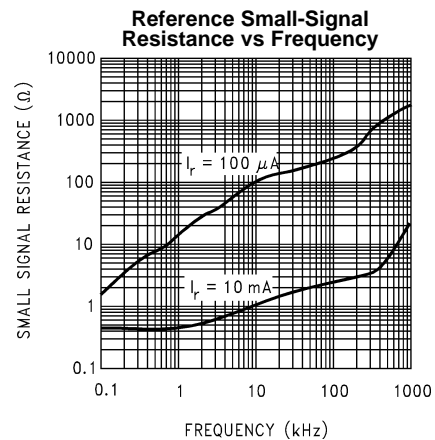


Figure 18.

TYPICAL PERFORMANCE CHARACTERISTICS (Reference) (continued)

$T_J = 25^\circ\text{C}$, FEEDBACK pin shorted to $V^- = 0\text{V}$, unless otherwise noted

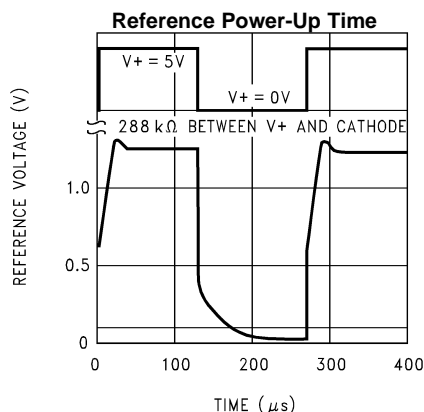


Figure 19.

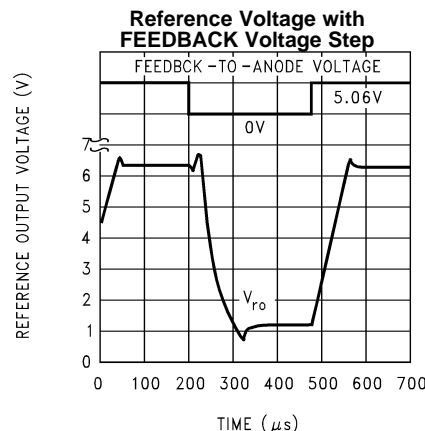


Figure 20.

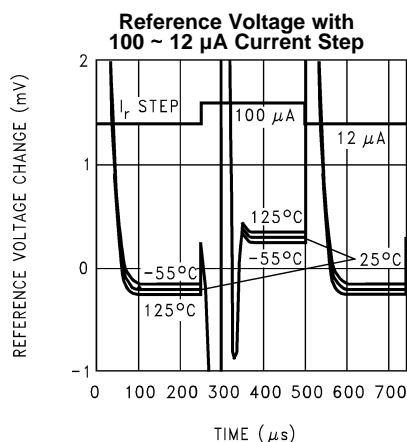


Figure 21.

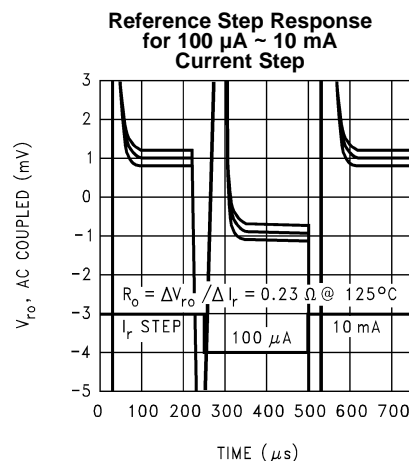


Figure 22.

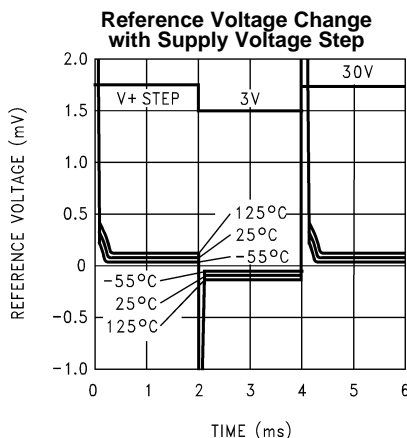


Figure 23.







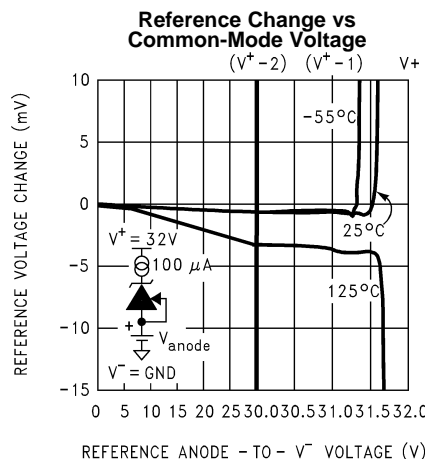


Figure 24.

TYPICAL PERFORMANCE CHARACTERISTICS (Op Amps)

$V^+ = 5V$, $V^- = GND = 0V$, $V_{CM} = V^+/2$, $V_{OUT} = V^+/2$, $T_J = 25^\circ C$, unless otherwise noted

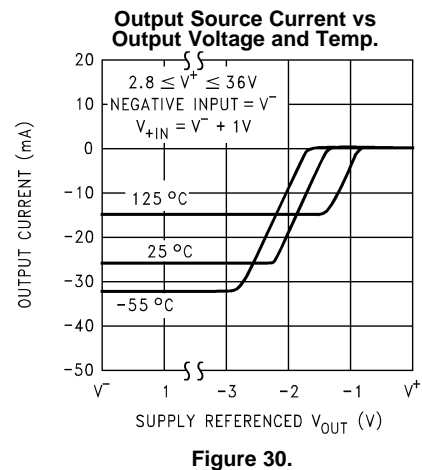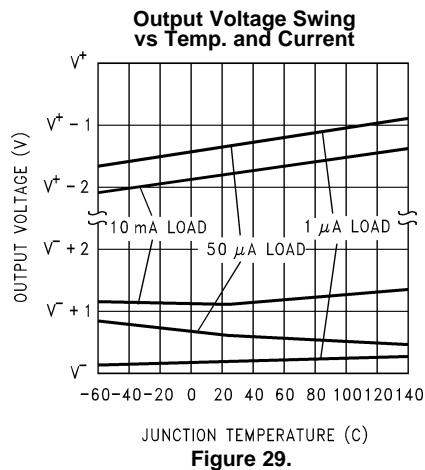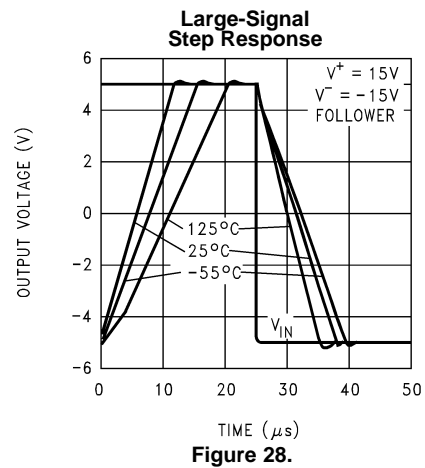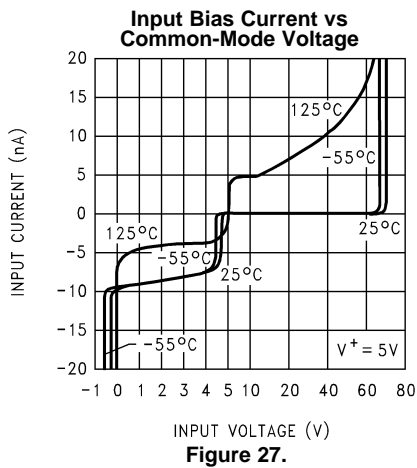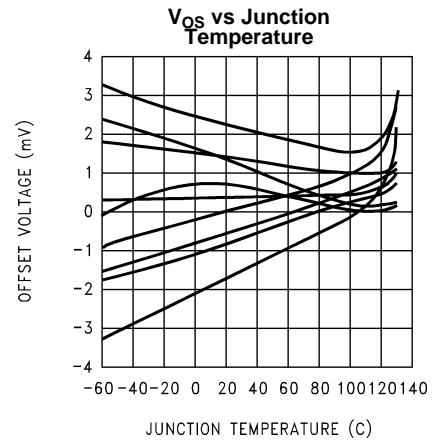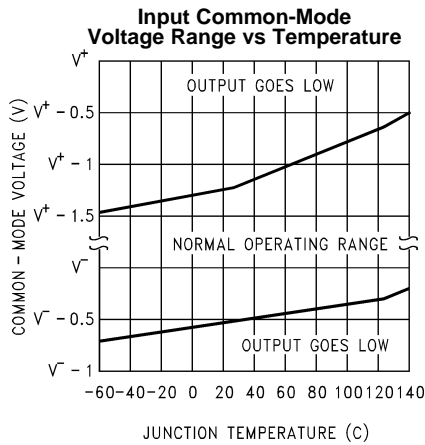

TYPICAL PERFORMANCE CHARACTERISTICS (Op Amps) (continued)

$V^+ = 5V$, $V^- = GND = 0V$, $V_{CM} = V^+/2$, $V_{OUT} = V^+/2$, $T_J = 25^\circ C$, unless otherwise noted

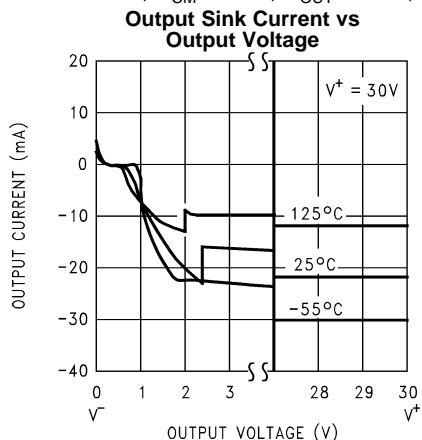


Figure 31.

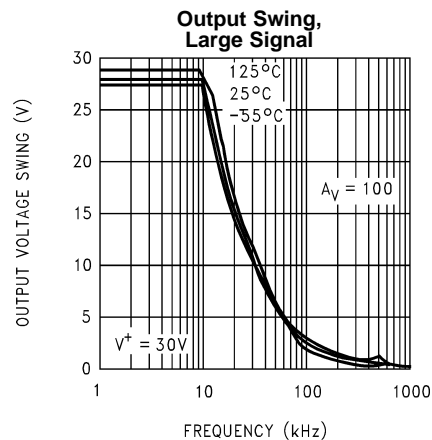


Figure 32.

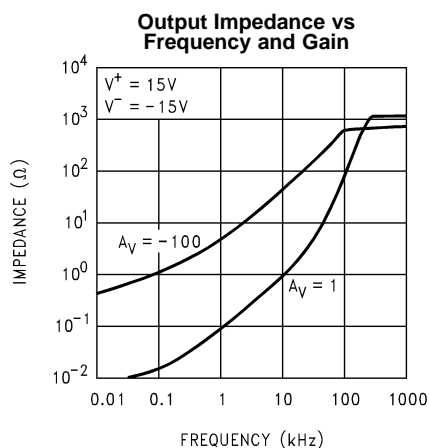


Figure 33.

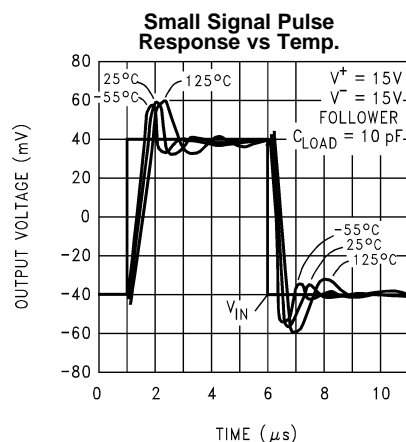


Figure 34.

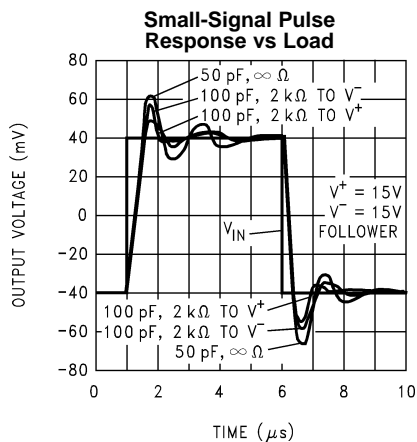


Figure 35.







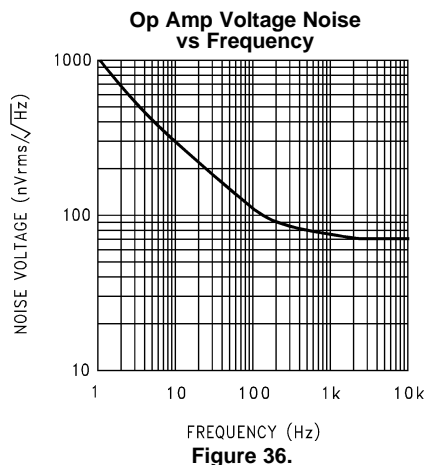


Figure 36.

TYPICAL PERFORMANCE CHARACTERISTICS (Op Amps) (continued)

$V^+ = 5V$, $V^- = GND = 0V$, $V_{CM} = V^+/2$, $V_{OUT} = V^+/2$, $T_J = 25^\circ C$, unless otherwise noted

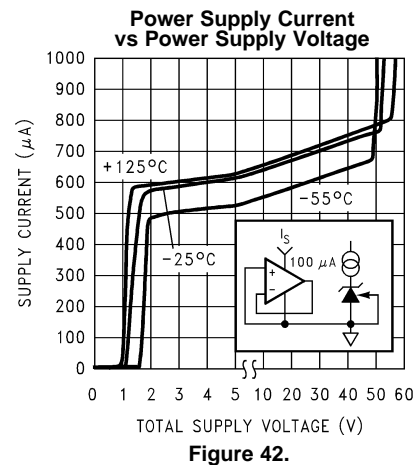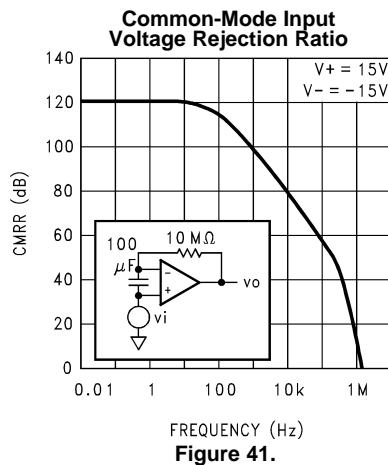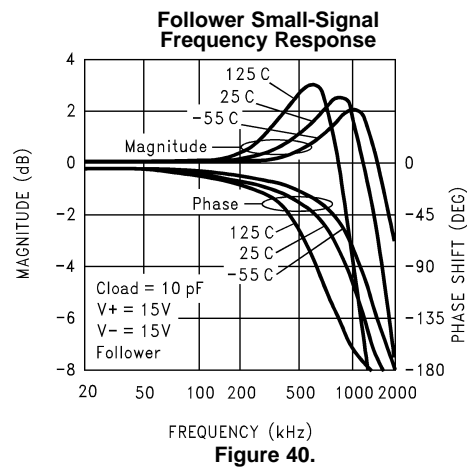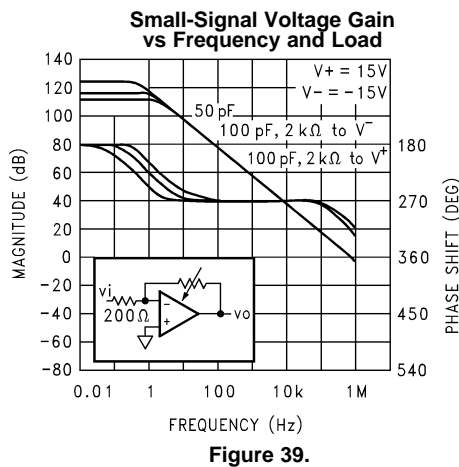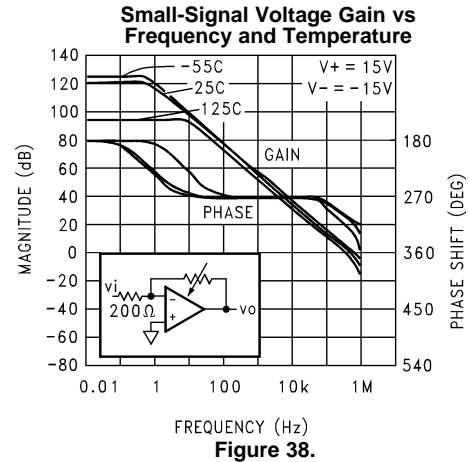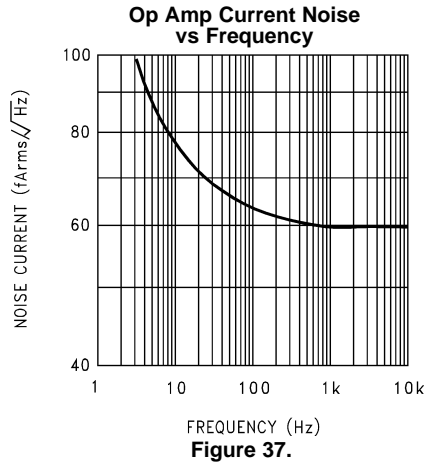

TYPICAL PERFORMANCE CHARACTERISTICS (Op Amps) (continued)

$V^+ = 5V$, $V^- = GND = 0V$, $V_{CM} = V^+/2$, $V_{OUT} = V^+/2$, $T_J = 25^\circ C$, unless otherwise noted

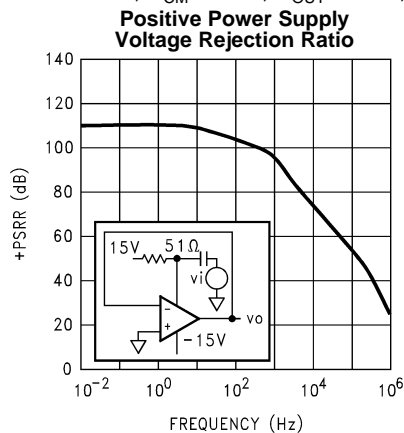


Figure 43.

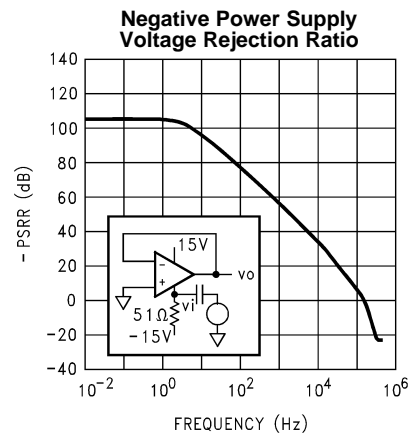


Figure 44.

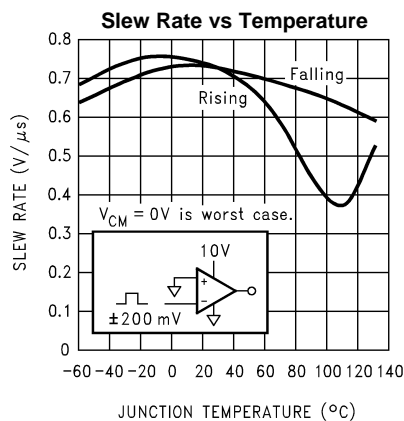


Figure 45.

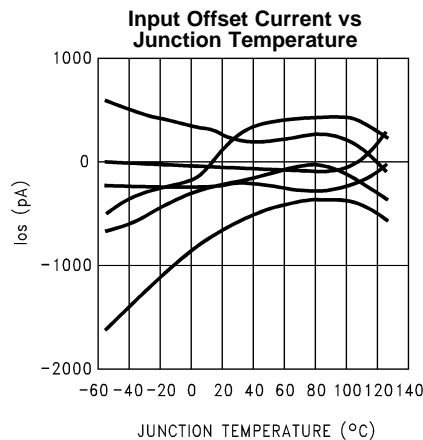


Figure 46.

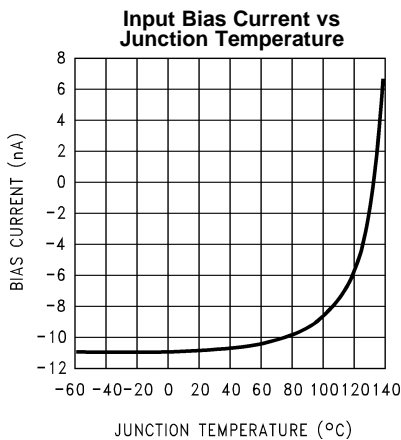


Figure 47.

TYPICAL PERFORMANCE CHARACTERISTICS (Comparators)

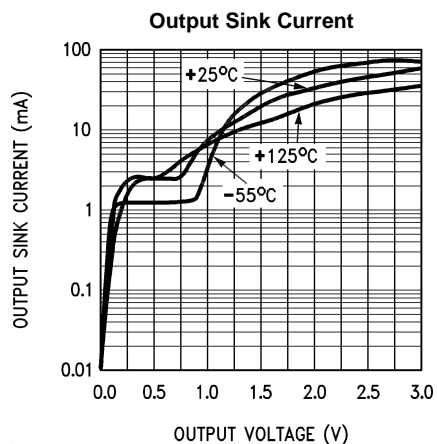


Figure 48.

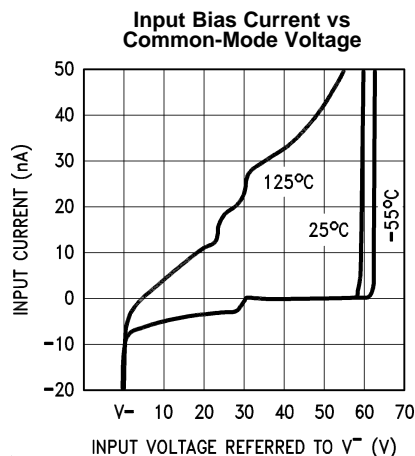


Figure 49.

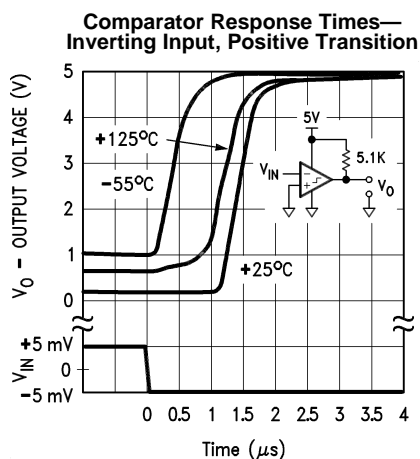


Figure 50.

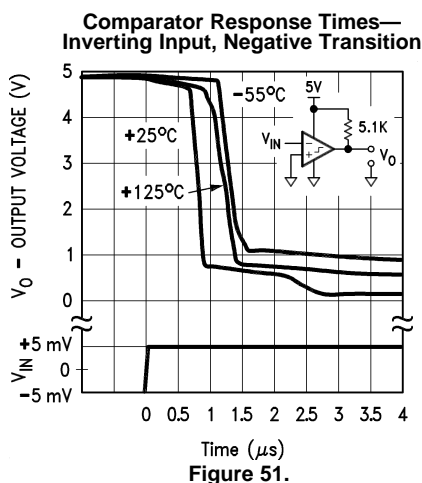


Figure 51.

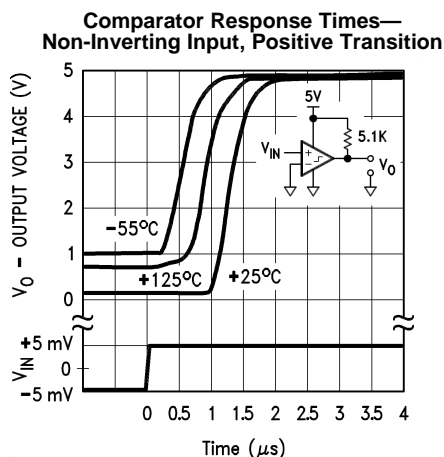


Figure 52.

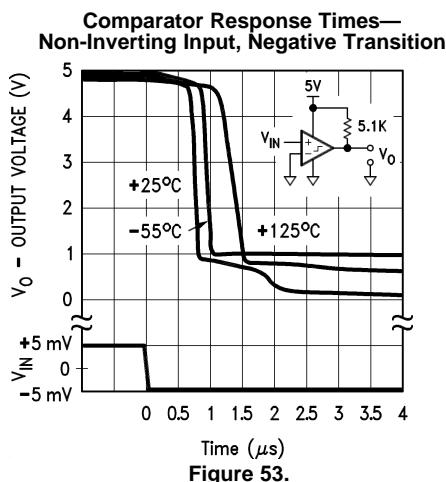


Figure 53.

TYPICAL PERFORMANCE CHARACTERISTICS (Comparators) (continued)

Comparator Response Times—
Inverting Input, Positive Transition

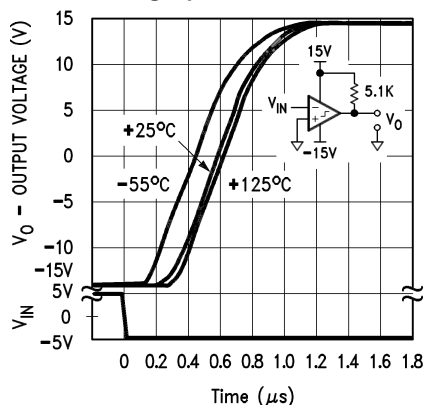


Figure 54.

Comparator Response Times—
Inverting Input, Negative Transition

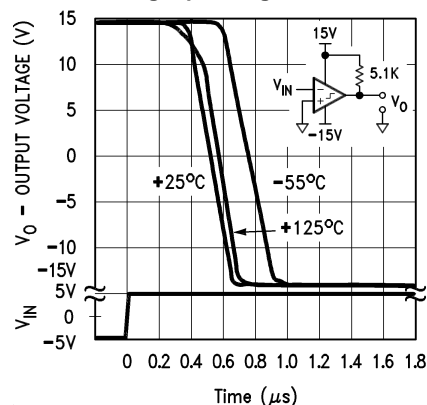


Figure 55.

Comparator Response Times—
Non-Inverting Input, Positive Transition

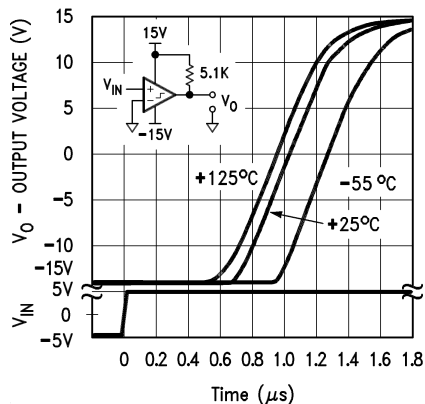


Figure .

Comparator Response Times—
Non-Inverting Input, Negative Transition







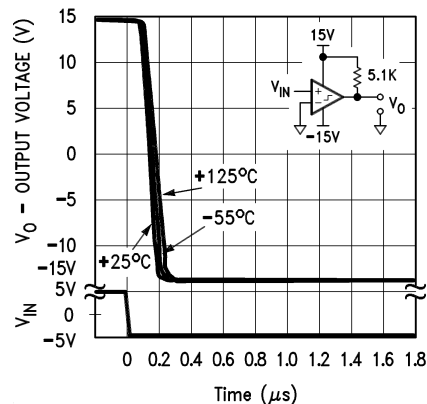


Figure 56.

TYPICAL PERFORMANCE DISTRIBUTIONS

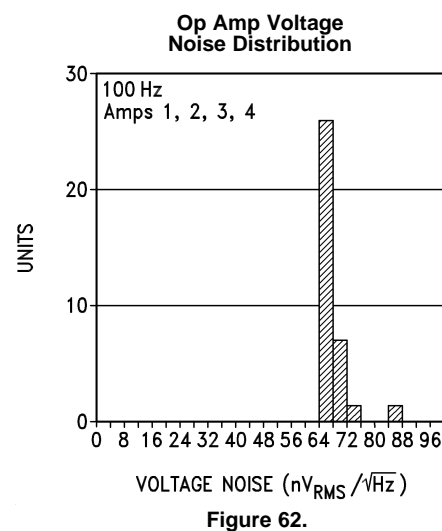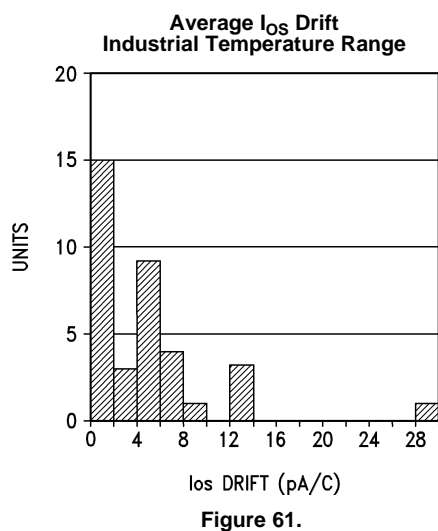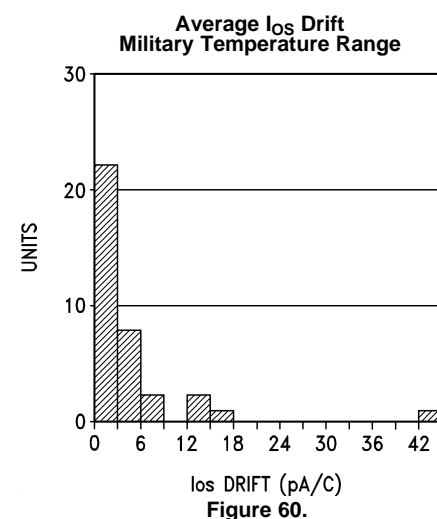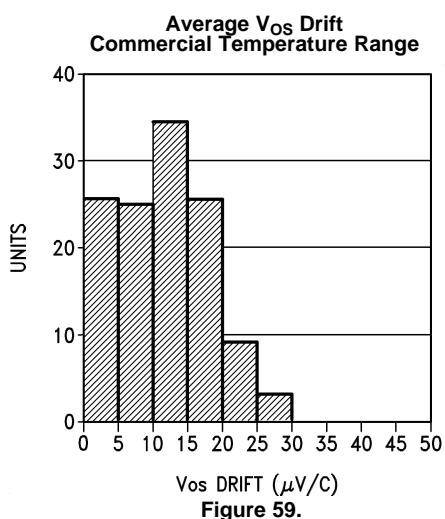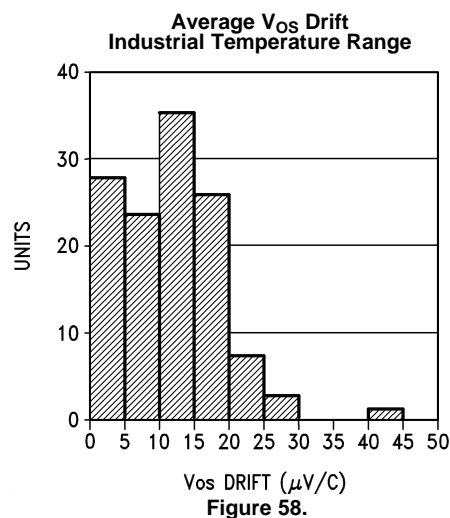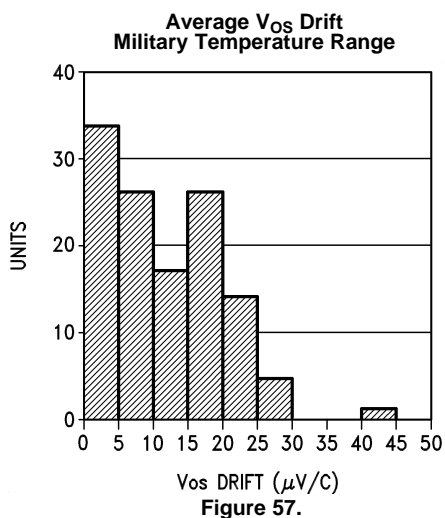

TYPICAL PERFORMANCE DISTRIBUTIONS (continued)

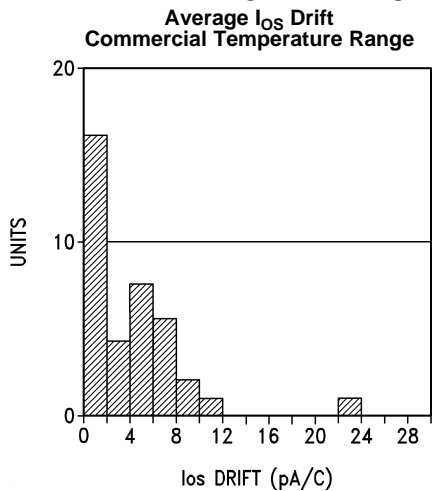


Figure 63.

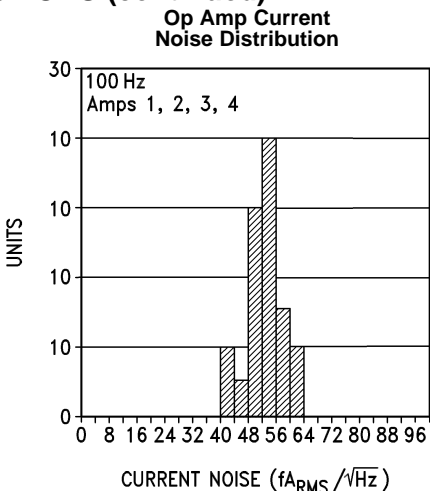


Figure 64.

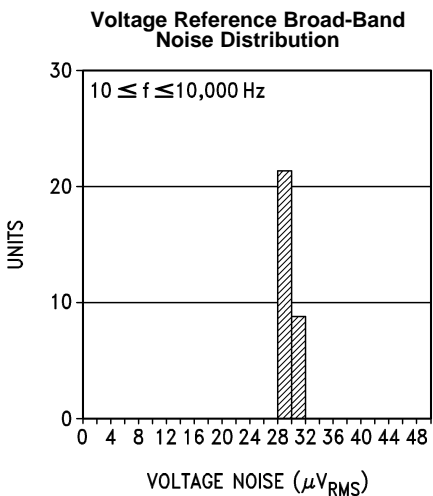


Figure 65.

APPLICATION INFORMATION

VOLTAGE REFERENCE

Reference Biasing

The voltage reference is of a shunt regulator topology that models as a simple zener diode. With current I_r flowing in the “forward” direction there is the familiar diode transfer function. I_r flowing in the reverse direction forces the reference voltage to be developed from cathode to anode. The cathode may swing from a diode drop below V^- to the reference voltage or to the avalanche voltage of the parallel protection diode, nominally 7V. A 6.3V reference with $V^+ = 3V$ is allowed.

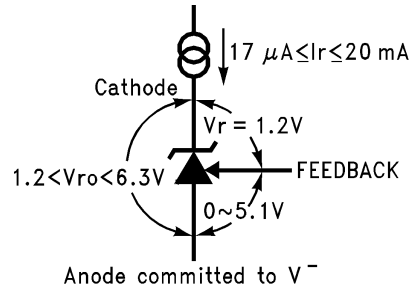


Figure 66. Voltage Associated with Reference
(current source I_r is external)

The reference equivalent circuit reveals how V_r is held at the constant 1.2V by feedback, and how the FEEDBACK pin passes little current.

To generate the required reverse current, typically a resistor is connected from a supply voltage higher than the reference voltage. Varying that voltage, and so varying I_r , has small effect with the equivalent series resistance of less than an ohm at the higher currents. Alternatively, an active current source, such as the LM134 series, may generate I_r .

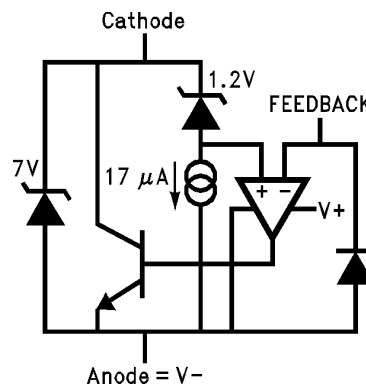


Figure 67. Reference Equivalent Circuit




Figure 68. 1.2V Reference

Capacitors in parallel with the reference are allowed. See the [Reference AC Stability Range](#) typical curve for capacitance values—from 20 μA to 3 mA any capacitor value is stable. With the reference's wide stability range with resistive and capacitive loads, a wide range of RC filter values will perform noise filtering.

Adjustable Reference

The FEEDBACK pin allows the reference output voltage, V_{ro} , to vary from 1.24V to 6.3V. The reference attempts to hold V_r at 1.24V. If V_r is above 1.24V, the reference will conduct current from Cathode to Anode; FEEDBACK current always remains low. If FEEDBACK is connected to Anode, then $V_{ro} = V_r = 1.24\text{V}$. For higher voltages FEEDBACK is held at a constant voltage above Anode—say 3.76V for $V_{ro} = 5\text{V}$. Connecting a resistor across the constant V_r generates a current $I = R1/V_r$ flowing from Cathode into FEEDBACK node. A Thevenin equivalent 3.76V is generated from FEEDBACK to Anode with $R2 = 3.76/I$. Keep I greater than one thousand times larger than FEEDBACK bias current for $<0.1\%$ error— $I \geq 32\text{ }\mu\text{A}$ for the military grade over the military temperature range ($I \geq 5.5\text{ }\mu\text{A}$ for a 1% untrimmed error for a commercial part).





Figure 69. Thevenin Equivalent of Reference with 5V Output

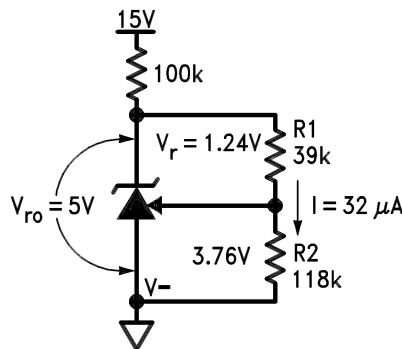

$$R1 = V_r/I = 1.24/32\mu = 39k$$

$$R2 = R1 \{ (V_{ro}/V_r) - 1 \} = 39k \{ (5/1.24) - 1 \} = 118k$$

Figure 70. Resistors R1 and R2 Program Reference Output Voltage to be 5V

Understanding that V_r is fixed and that voltage sources, resistors, and capacitors may be tied to the FEEDBACK pin, a range of V_r temperature coefficients may be synthesized.

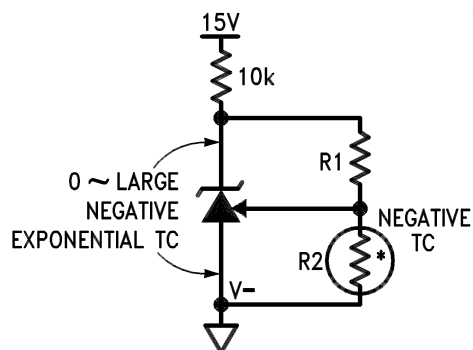


Figure 71. Output Voltage has Negative Temperature Coefficient (TC) if R2 has Negative TC

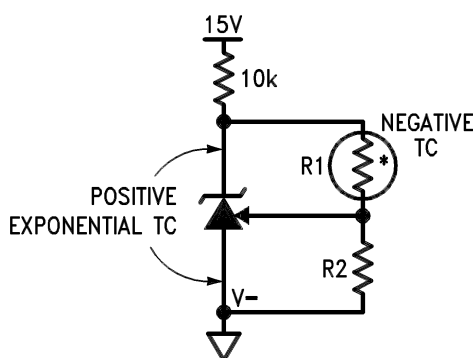


Figure 72. Output Voltage has Positive TC if R1 has Negative TC


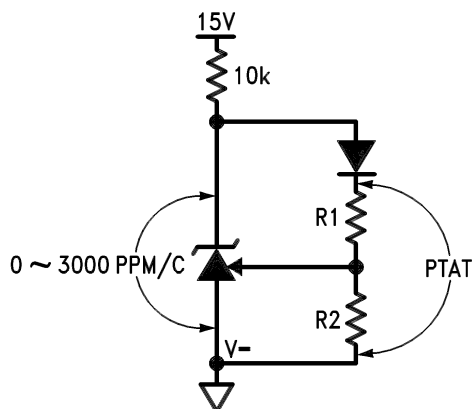


Figure 73. Diode in Series with R1 Causes Voltage Across R1 and R2 to be Proportional to Absolute Temperature (PTAT)

Connecting a resistor across Cathode-to-FEEDBACK creates a 0 TC current source, but a range of TCs may be synthesized.

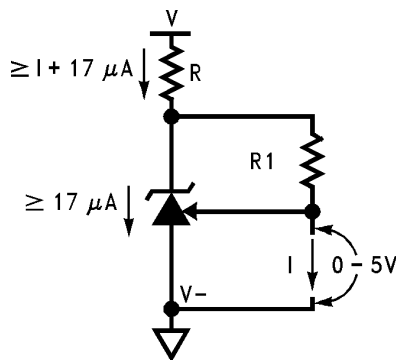

$$I = V_T / R_1 = 1.24 / R_1$$

Figure 74. Current Source is Programmed by R1

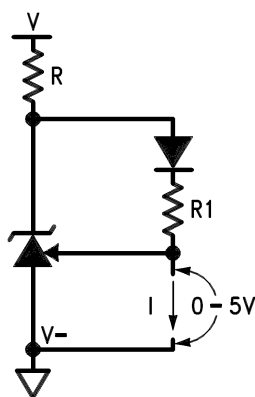


Figure 75. Proportional-to-Absolute-Temperature Current Source

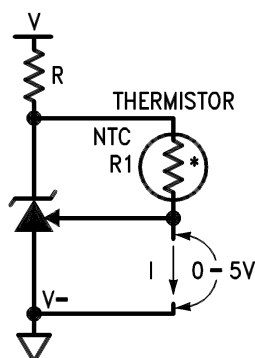


Figure 76. Negative-TC Current Source

Reference Hysteresis

The reference voltage depends, slightly, on the thermal history of the die. Competitive micro-power products vary— always check the data sheet for any given device. Do not assume that no specification means no hysteresis.

OPERATIONAL AMPLIFIERS AND COMPARATORS

Any amp, comparator, or the reference may be biased in any way with no effect on the other sections of the LM613, except when a substrate diode conducts, see ⁽¹⁾ in [Electrical Characteristics](#). For example, one amp input may be outside the common-mode range, another amp may be operating as a comparator, and all other sections may have all terminals floating with no effect on the others. Tying inverting input to output and non-inverting input to V^- on unused amps is preferred. Unused comparators should have non-inverting input and output tied to V^+ , and inverting input tied to V^- . Choosing operating points that cause oscillation, such as driving too large a capacitive load, is best avoided.

Op Amp Output Stage

These op amps, like the LM124 series, have flexible and relatively wide-swing output stages. There are simple rules to optimize output swing, reduce cross-over distortion, and optimize capacitive drive capability:

1. Output Swing: Unloaded, the 42 μA pull-down will bring the output within 300 mV of V^- over the military temperature range. If more than 42 μA is required, a resistor from output to V^- will help. Swing across any load may be improved slightly if the load can be tied to V^+ , at the cost of poorer sinking open-loop voltage gain.
2. Cross-Over Distortion: The LM613 has lower cross-over distortion (a 1 V_{BE} deadband versus 3 V_{BE} for the LM124), and increased slew rate as shown in the characteristic curves. A resistor pull-up or pull-down will force class-A operation with only the PNP or NPN output transistor conducting, eliminating cross-over distortion.
3. Capacitive Drive: Limited by the output pole caused by the output resistance driving capacitive loads, a pull-down resistor conducting 1 mA or more reduces the output stage NPN r_e until the output resistance is that of the current limit 25 Ω . 200 pF may then be driven without oscillation.

Comparator Output Stage

The comparators, like the LM139 series, have open-collector output stages. A pull-up resistor must be added from each output pin to a positive voltage for the output transistor to switch properly. When the output transistor is OFF, the output voltage will be this external positive voltage.

For the output voltage to be under the TTL-low voltage threshold when the output transistor is ON, the output current must be less than 8 mA (over temperature). This impacts the minimum value of pull-up resistor.

The offset voltage may increase when the output voltage is low and the output current is less than 30 μA . Thus, for best accuracy, the pull-up resistor value should be low enough to allow the output transistor to sink more than 30 μA .

Op Amp and Comparator Input Stage

The lateral PNP input transistors, unlike those of most op amps, have BV_{EBO} equal to the absolute maximum supply voltage. Also, they have no diode clamps to the positive supply nor across the inputs. These features make the inputs look like high impedances to input sources producing large differential and common-mode voltages.

(1) Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device beyond its rated operating conditions.

Typical Applications

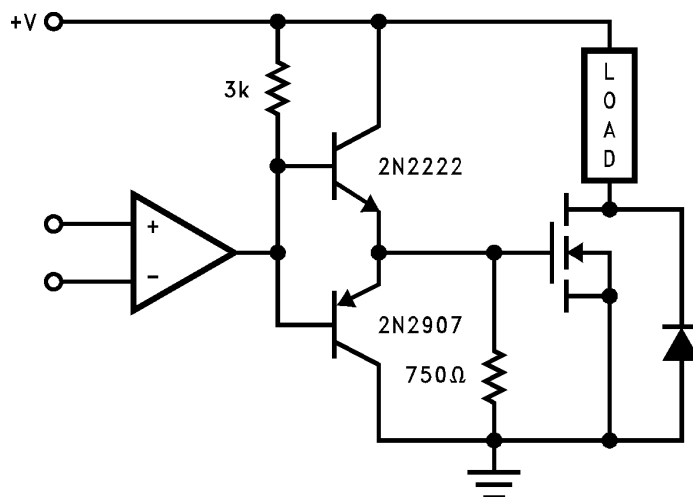


Figure 77. High Current, High Voltage Switch


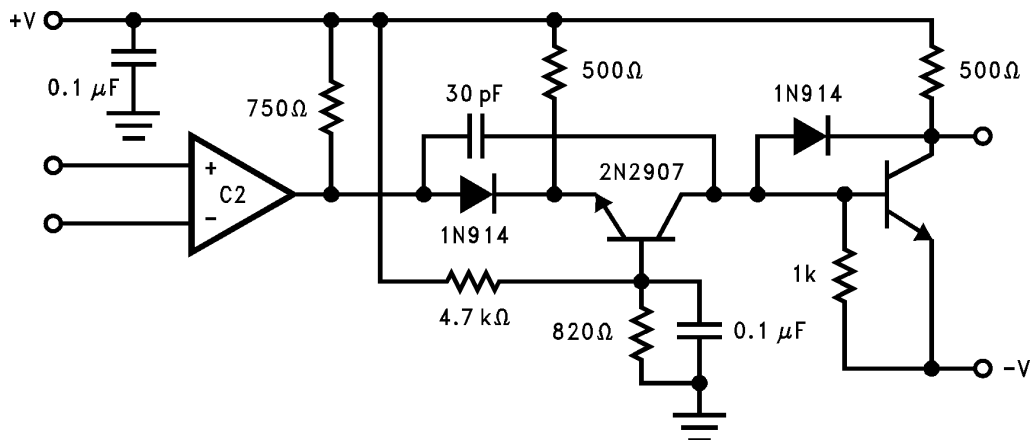


Figure 78. High Speed Level Shifter. Response Time is Approximately 1.5 μs, Where Output is Either Approximately +V or -V.

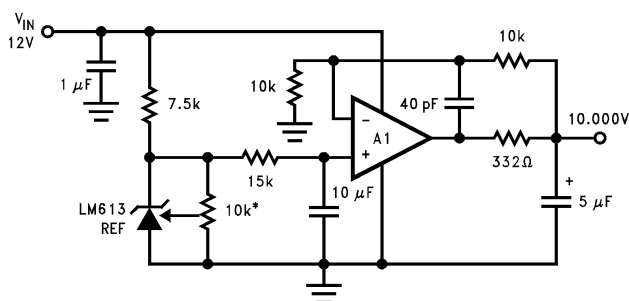

*10k must be low
t.c. trimpot

Figure 79. Ultra Low Noise, 10.00V Reference. Total Output Noise is Typically 14 μV_{RMS}.

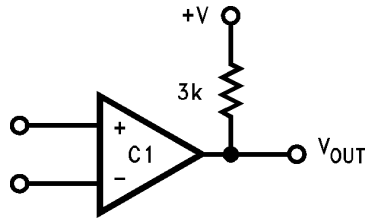


Figure 80. Basic Comparator

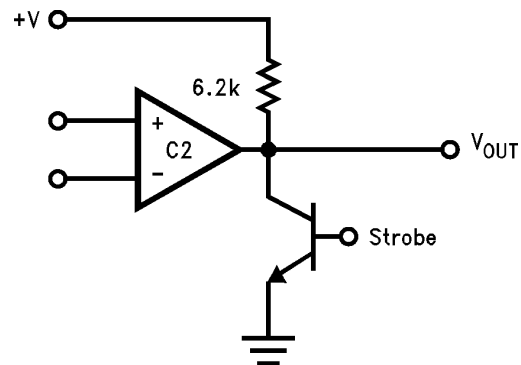


Figure 81. Basic Comparator with External Strobe

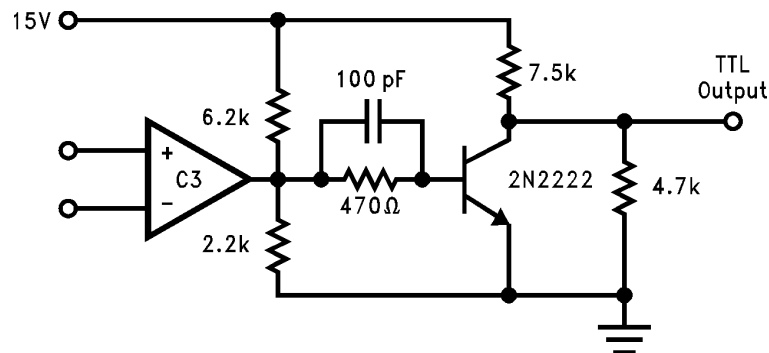


Figure 82. Wide-Input Range Comparator with TTL Output

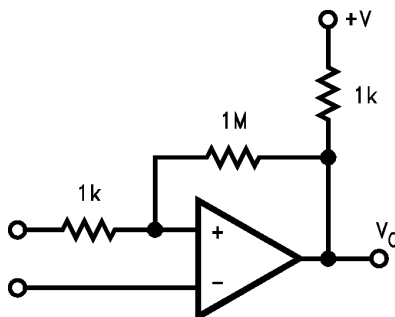


Figure 83. Comparator with Hysteresis ($\Delta V_H = +V(1k/1M)$)

REVISION HISTORY

Changes from Revision A (March 2013) to Revision B

Page

- Changed layout of National Data Sheet to TI format [25](#)

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
LM613IWM	NRND	SOIC	DW	16	45	TBD	Call TI	Call TI	-40 to 85	LM613IWM	
LM613IWM/NOPB	ACTIVE	SOIC	DW	16	45	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	-40 to 85	LM613IWM	Samples
LM613IWMX	NRND	SOIC	DW	16	1000	TBD	Call TI	Call TI	-40 to 85	LM613IWM	
LM613IWMX/NOPB	ACTIVE	SOIC	DW	16	1000	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	-40 to 85	LM613IWM	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LM613IWMX	SOIC	DW	16	1000	330.0	16.4	10.9	10.7	3.2	12.0	16.0	Q1
LM613IWMX/NOPB	SOIC	DW	16	1000	330.0	16.4	10.9	10.7	3.2	12.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LM613IWMX	SOIC	DW	16	1000	367.0	367.0	38.0
LM613IWMX/NOPB	SOIC	DW	16	1000	367.0	367.0	38.0

DW (R-PDSO-G16)

PLASTIC SMALL OUTLINE



- NOTES:
- All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.
 - This drawing is subject to change without notice.
 - Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
 - Falls within JEDEC MS-013 variation AA.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com