


KRD CONNECTOR

2.0mm pitch/Disconnectable Insulation displacement connectors

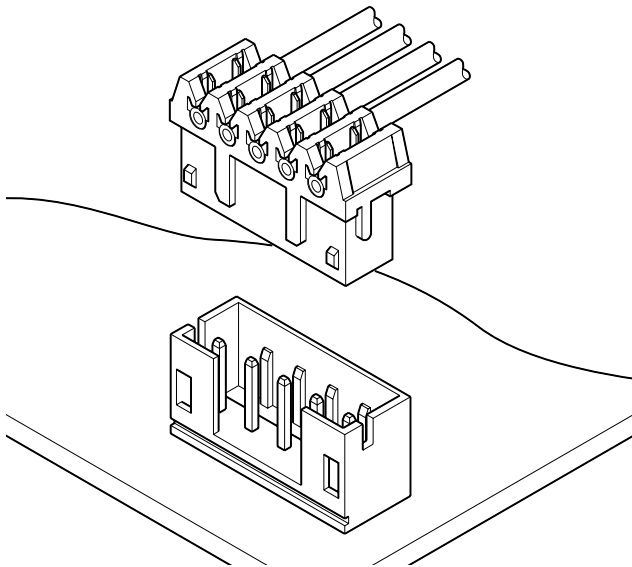


This 2.0mm pitch insulation displacement connector is another version of the NRD connector for printed circuit boards. The KRD connector allows daisy chaining and is very useful in simplifying connection systems in electronic equipment.

- **Daisy chain connection**
- **Twin slot insulation displacement section**
- **Distortion resistant construction**
- **Interchangeability**
- **Low profile design - a mere 9.0mm high from the PC board surface**

<Through-hole type>

Top entry type

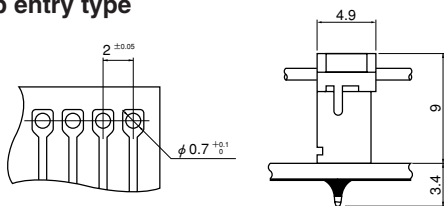


Note: 1. The above figure is the figure viewed from soldering side.

2. Tolerances are non-cumulative: $\pm 0.05\text{mm}$ for all centers.


3. Hole dimensions differ according to the type of PC boards and piercing method. If PC boards made of hard material are used, the hole dimensions should be larger. The dimensions above should serve as a guideline. Contact JST for details.

Side entry type

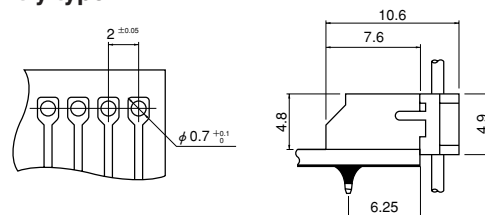

<SMT type/SM4 type>

Top entry type

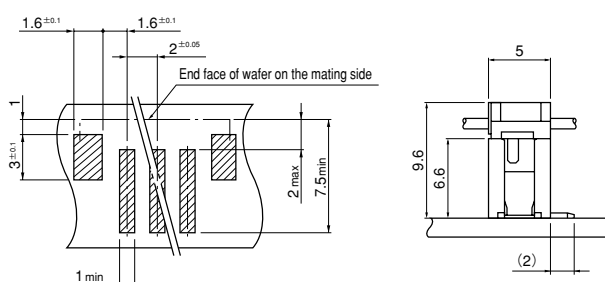


Note: 1. The above figure is the figure viewed from the connector mounting side.

2. Tolerances are non-cumulative: $\pm 0.05\text{mm}$ for all centers.

3. The dimensions above should serve as a guideline. Contact JST for details.

Side entry type

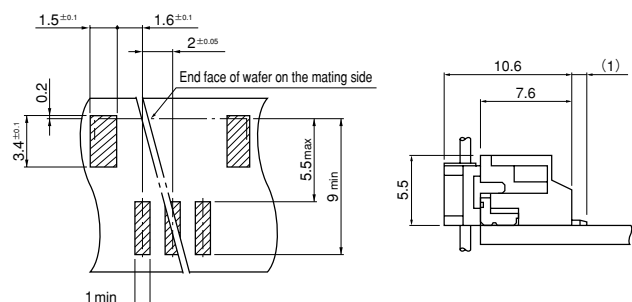

Specifications

- Current rating: 1.0 A AC, DC (AWG #26)
- Voltage rating: 100 V AC, DC
- Temperature range: -25°C to $+85^{\circ}\text{C}$
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 10 m Ω max.
After environmental tests/ 20 m Ω max.
- Insulation resistance: 1,000 M Ω min.
- Withstanding voltage: 800 VAC/minute
- Applicable wire: UL1571, UL1061 (Contact JST for details regarding other UL styles.)
AWG #28, #26
Conductor/ 7 strands, tin-coated
Insulation O.D./ 0.9 to 1.0 mm
- Applicable PC board thickness: 0.8 to 1.6 mm

* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.

* Contact JST for details.


* Compliant with RoHS.

Standards

Recognized E60389

Certified LR20812

Socket

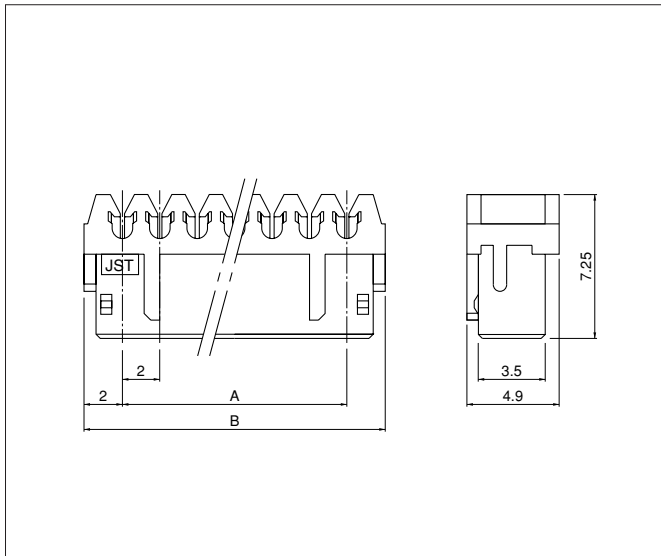

| Circuits | Model No. | | Dimensions (mm) | | Q'ty / box |
|----------|----------------|------------------------|-----------------|------|------------|
| | AWG #28(green) | AWG #26(natural/white) | A | B | |
| 2 | 02KR-D8M-P | 02KR-D6S-P | 2.0 | 6.0 | 2,000 |
| 3 | 03KR-D8M-P | 03KR-D6S-P | 4.0 | 8.0 | 2,000 |
| 4 | 04KR-D8M-P | 04KR-D6S-P | 6.0 | 10.0 | 2,000 |
| 5 | 05KR-D8M-P | 05KR-D6S-P | 8.0 | 12.0 | 1,000 |
| 6 | 06KR-D8M-P | 06KR-D6S-P | 10.0 | 14.0 | 1,000 |
| 7 | 07KR-D8M-P | 07KR-D6S-P | 12.0 | 16.0 | 1,000 |
| 8 | 08KR-D8M-P | 08KR-D6S-P | 14.0 | 18.0 | 1,000 |
| 9 | 09KR-D8M-P | 09KR-D6S-P | 16.0 | 20.0 | 500 |
| 10 | 10KR-D8M-P | 10KR-D6S-P | 18.0 | 22.0 | 500 |
| 11 | 11KR-D8M-P | 11KR-D6S-P | 20.0 | 24.0 | 500 |
| 12 | 12KR-D8M-P | 12KR-D6S-P | 22.0 | 26.0 | 500 |
| 13 | 13KR-D8M-P | 13KR-D6S-P | 24.0 | 28.0 | 500 |
| 14 | 14KR-D8M-P | 14KR-D6S-P | 26.0 | 30.0 | 500 |
| 15 | 15KR-D8M-P | 15KR-D6S-P | 28.0 | 32.0 | 500 |
| 16 | 16KR-D8M-P | 16KR-D6S-P | 30.0 | 34.0 | 500 |

Material and Finish

Contact: Phosphor bronze, tin-plated (reflow treatment)
Housing: PA 66, UL94V-0

RoHS compliance

<For reference> As the color identification,
the following alphabet shall be put in the underlined part.
For availability, delivery and minimum order quantity, contact JST.

ex. 02KR-D6S-P

AWG#26: S...natural (white)

AWG#28: M...green

Shrouded header

The shrouded headers are interchangeable with the PH crimp style connectors and with CR and KR insulation displacement connectors.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com