

|                     |      |
|---------------------|------|
| $V_{DSS}$           | 650V |
| $R_{DS(on)}$ (Typ.) | 60mΩ |
| $I_D^{*1}$          | 39A  |
| $P_D$               | 165W |

### ●Features


- 1) Low on-resistance
- 2) Fast switching speed
- 3) Fast reverse recovery
- 4) Easy to parallel
- 5) Simple to drive
- 6) Pb-free lead plating ; RoHS compliant

### ●Application


- Solar inverters
- DC/DC converters
- Switch mode power supplies
- Induction heating
- Motor drives

### ●Outline

TO-247-4L



### ●Inner circuit

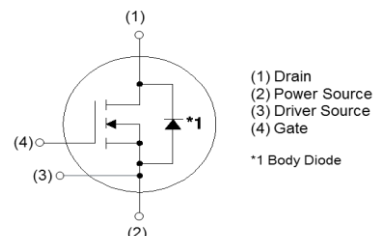

Please note Driver Source and Power Source are not exchangeable. Their exchange might lead to malfunction.

### ●Packaging specifications

|      |                           |           |
|------|---------------------------|-----------|
| Type | Packing                   | Tube      |
|      | Reel size (mm)            | -         |
|      | Tape width (mm)           | -         |
|      | Basic ordering unit (pcs) | 30        |
|      | Taping code               | C14       |
|      | Marking                   | SCT3060AR |

### ●Absolute maximum ratings ( $T_a = 25^\circ\text{C}$ )

| Parameter                                                  |                           | Symbol               | Value       | Unit             |
|------------------------------------------------------------|---------------------------|----------------------|-------------|------------------|
| Drain - Source Voltage                                     |                           | $V_{DSS}$            | 650         | V                |
| Continuous Drain current                                   | $T_c = 25^\circ\text{C}$  | $I_D^{*1}$           | 39          | A                |
|                                                            | $T_c = 100^\circ\text{C}$ | $I_D^{*1}$           | 27          | A                |
| Pulsed Drain current                                       |                           | $I_{D,pulse}^{*2}$   | 97          | A                |
| Gate - Source voltage (DC)                                 |                           | $V_{GSS}$            | -4 to +22   | V                |
| Gate - Source surge voltage ( $t_{surge} < 300\text{ns}$ ) |                           | $V_{GSS,surge}^{*3}$ | -4 to +26   | V                |
| Recommended drive voltage                                  |                           | $V_{GS,op}^{*4}$     | 0 / +18     | V                |
| Junction temperature                                       |                           | $T_j$                | 175         | $^\circ\text{C}$ |
| Range of storage temperature                               |                           | $T_{stg}$            | -55 to +175 | $^\circ\text{C}$ |

**●Electrical characteristics** ( $T_a = 25^\circ\text{C}$ )


| Parameter                                   | Symbol            | Conditions                                                                            | Values     |          |         | Unit          |
|---------------------------------------------|-------------------|---------------------------------------------------------------------------------------|------------|----------|---------|---------------|
|                                             |                   |                                                                                       | Min.       | Typ.     | Max.    |               |
| Drain - Source breakdown voltage            | $V_{(BR)DSS}$     | $V_{GS} = 0V, I_D = 1mA$<br>$T_j = 25^\circ\text{C}$<br>$T_j = -55^\circ\text{C}$     | 650<br>650 | -<br>-   | -<br>-  | V             |
| Zero Gate voltage Drain current             | $I_{DSS}$         | $V_{GS} = 0V, V_{DS} = 650V$<br>$T_j = 25^\circ\text{C}$<br>$T_j = 150^\circ\text{C}$ | -<br>-     | 1<br>2   | 10<br>- | $\mu\text{A}$ |
| Gate - Source leakage current               | $I_{GSS+}$        | $V_{GS} = +22V, V_{DS} = 0V$                                                          | -          | -        | 100     | nA            |
| Gate - Source leakage current               | $I_{GSS-}$        | $V_{GS} = -4V, V_{DS} = 0V$                                                           | -          | -        | -100    | nA            |
| Gate threshold voltage                      | $V_{GS(th)}$      | $V_{DS} = 10V, I_D = 6.67mA$                                                          | 2.7        | -        | 5.6     | V             |
| Static Drain - Source on - state resistance | $R_{DS(on)}^{*5}$ | $V_{GS} = 18V, I_D = 13A$<br>$T_j = 25^\circ\text{C}$<br>$T_j = 150^\circ\text{C}$    | -<br>-     | 60<br>86 | 78<br>- | m $\Omega$    |
| Gate input resistance                       | $R_G$             | $f = 1\text{MHz}, \text{open drain}$                                                  | -          | 12       | -       | $\Omega$      |

**●Thermal resistance**

| Parameter                           | Symbol     | Values |      |      | Unit               |
|-------------------------------------|------------|--------|------|------|--------------------|
|                                     |            | Min.   | Typ. | Max. |                    |
| Thermal resistance, junction - case | $R_{thJC}$ | -      | 0.70 | 0.91 | $^\circ\text{C/W}$ |

**●Typical Transient Thermal Characteristics**

| Symbol    | Value                 | Unit | Symbol    | Value                 | Unit |
|-----------|-----------------------|------|-----------|-----------------------|------|
| $R_{th1}$ | $8.52 \times 10^{-2}$ | K/W  | $C_{th1}$ | $1.22 \times 10^{-3}$ | Ws/K |
| $R_{th2}$ | $4.15 \times 10^{-1}$ |      | $C_{th2}$ | $6.20 \times 10^{-3}$ |      |
| $R_{th3}$ | $2.06 \times 10^{-1}$ |      | $C_{th3}$ | $3.49 \times 10^{-2}$ |      |

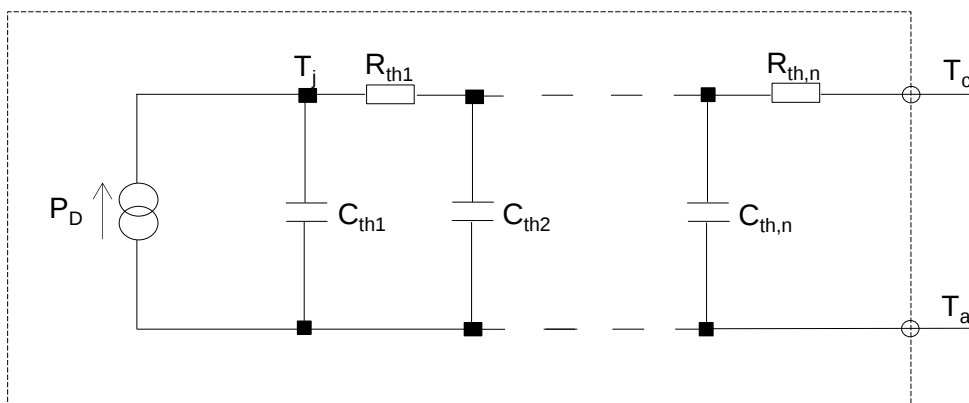

●Electrical characteristics ( $T_a = 25^\circ\text{C}$ )

| Parameter                                    | Symbol            | Conditions                                                                              | Values |      |      | Unit          |
|----------------------------------------------|-------------------|-----------------------------------------------------------------------------------------|--------|------|------|---------------|
|                                              |                   |                                                                                         | Min.   | Typ. | Max. |               |
| Transconductance                             | $g_{fs}^{*5}$     | $V_{DS} = 10\text{V}, I_D = 13\text{A}$                                                 | -      | 4.9  | -    | S             |
| Input capacitance                            | $C_{iss}$         | $V_{GS} = 0\text{V}$                                                                    | -      | 852  | -    | pF            |
| Output capacitance                           | $C_{oss}$         | $V_{DS} = 500\text{V}$                                                                  | -      | 55   | -    |               |
| Reverse transfer capacitance                 | $C_{rss}$         | $f = 1\text{MHz}$                                                                       | -      | 24   | -    |               |
| Effective output capacitance, energy related | $C_{o(er)}$       | $V_{GS} = 0\text{V}$<br>$V_{DS} = 0\text{V to } 300\text{V}$                            | -      | 126  | -    | pF            |
| Total Gate charge                            | $Q_g^{*5}$        | $V_{DS} = 300\text{V}$<br>$I_D = 13\text{A}$                                            | -      | 58   | -    | nC            |
| Gate - Source charge                         | $Q_{gs}^{*5}$     | $V_{GS} = 18\text{V}$                                                                   | -      | 11   | -    |               |
| Gate - Drain charge                          | $Q_{gd}^{*5}$     | See Fig. 1-1.                                                                           | -      | 31   | -    |               |
| Turn - on delay time                         | $t_{d(on)}^{*5}$  | $V_{DS} = 400\text{V}$<br>$I_D = 13\text{A}$                                            | -      | 5    | -    | ns            |
| Rise time                                    | $t_r^{*5}$        | $V_{GS} = 0\text{V}/+18\text{V}$                                                        | -      | 14   | -    |               |
| Turn - off delay time                        | $t_{d(off)}^{*5}$ | $R_G = 0\Omega, L = 750\mu\text{H}$<br>$L_\sigma = 50\text{nH}, C_\sigma = 10\text{pF}$ | -      | 17   | -    |               |
| Fall time                                    | $t_f^{*5}$        | See Fig. 2-1, 2-2, 2-3.                                                                 | -      | 13   | -    |               |
| Turn - on switching loss                     | $E_{on}^{*5}$     | $E_{on}$ includes diode reverse recovery.                                               | -      | 79   | -    | $\mu\text{J}$ |
| Turn - off switching loss                    | $E_{off}^{*5}$    |                                                                                         | -      | 18   | -    |               |


**●Body diode electrical characteristics (Source-Drain) ( $T_a = 25^\circ\text{C}$ )**

| Parameter                              | Symbol         | Conditions                                                                                                                                                | Values |      |      | Unit |
|----------------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------|------|------|
|                                        |                |                                                                                                                                                           | Min.   | Typ. | Max. |      |
| Body diode continuous, forward current | $I_S^{*1}$     | $T_c = 25^\circ\text{C}$                                                                                                                                  | -      | -    | 39   | A    |
| Body diode direct current, pulsed      | $I_{SM}^{*2}$  |                                                                                                                                                           | -      | -    | 97   | A    |
| Forward voltage                        | $V_{SD}^{*5}$  | $V_{GS} = 0\text{V}, I_D = 13\text{A}$                                                                                                                    | -      | 3.2  | -    | V    |
| Reverse recovery time                  | $t_{rr}^{*5}$  | $I_F = 13\text{A}$<br>$V_R = 400\text{V}$<br>$di/dt = 2500\text{A}/\mu\text{s}$<br>$L_\sigma = 50\text{nH}, C_\sigma = 10\text{pF}$<br>See Fig. 3-1, 3-2. | -      | 18   | -    | ns   |
| Reverse recovery charge                | $Q_{rr}^{*5}$  |                                                                                                                                                           | -      | 294  | -    | nC   |
| Peak reverse recovery current          | $I_{rrm}^{*5}$ |                                                                                                                                                           | -      | 27   | -    | A    |

\*1 Limited by maximum temperature allowed.

\*2  $P_W \leq 10\mu\text{s}$ , Duty cycle  $\leq 1\%$

\*3 Example of acceptable  $V_{GS}$  waveform

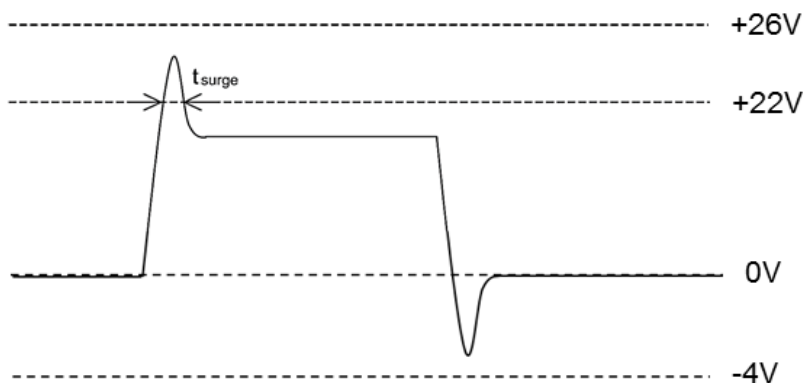

Please note especially when using driver source that  $V_{GSS\_surge}$  must be in the range of absolute maximum rating.

\*4 Please be advised not to use SiC-MOSFETs with  $V_{GS}$  below 13V as doing so may cause thermal runaway.

\*5 Pulsed

## ●Electrical characteristic curves

Fig.1 Power Dissipation Derating Curve

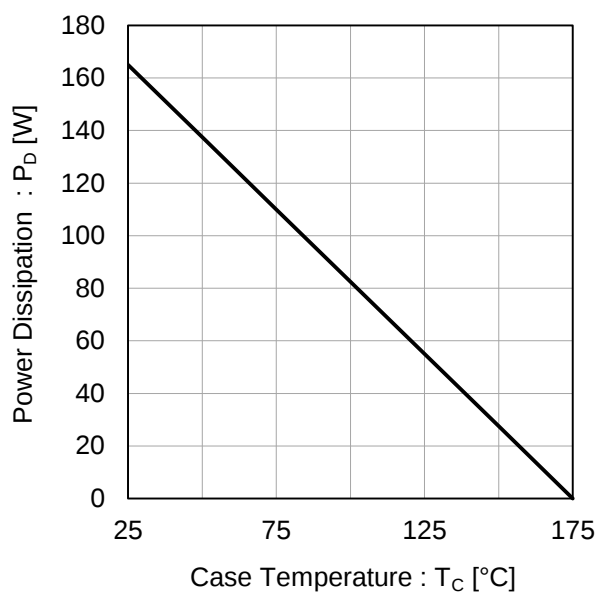


Fig.2 Maximum Safe Operating Area


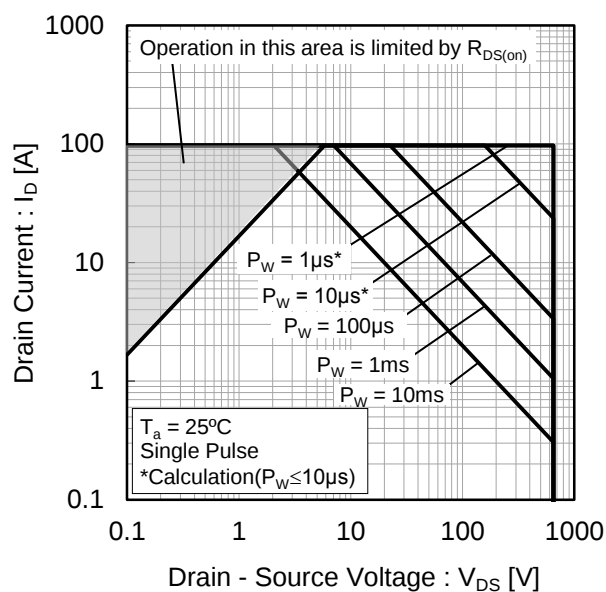


Fig.3 Typical Transient Thermal Resistance vs. Pulse Width

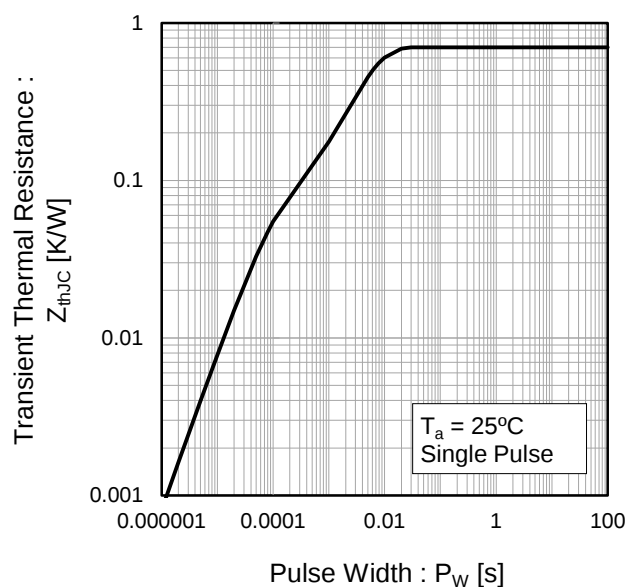

## ●Electrical characteristic curves

Fig.4 Typical Output Characteristics(I)

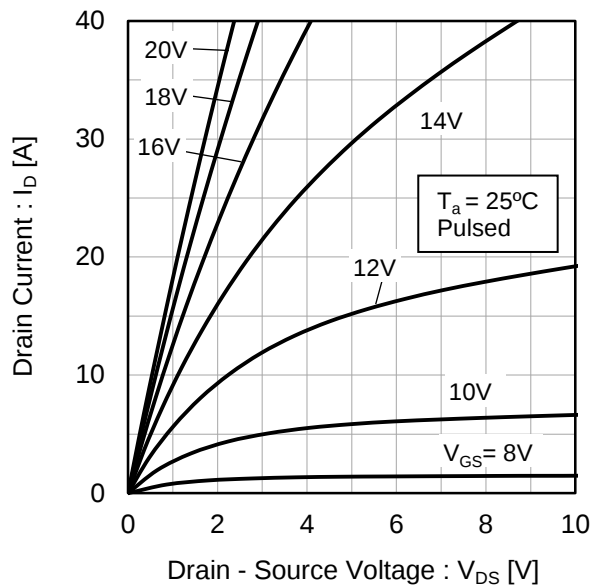
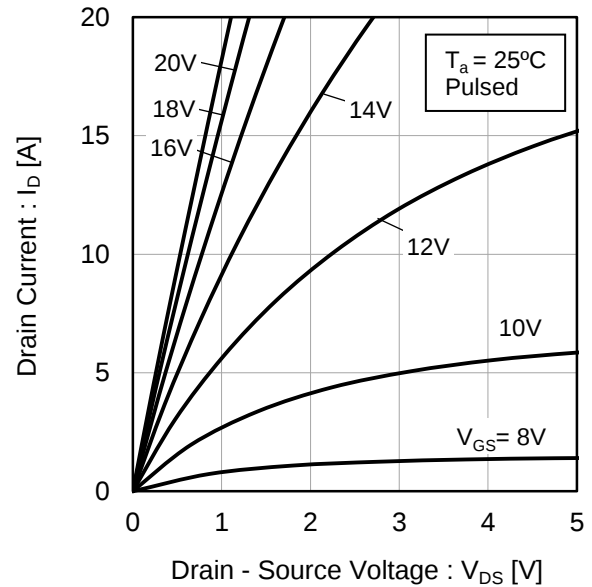
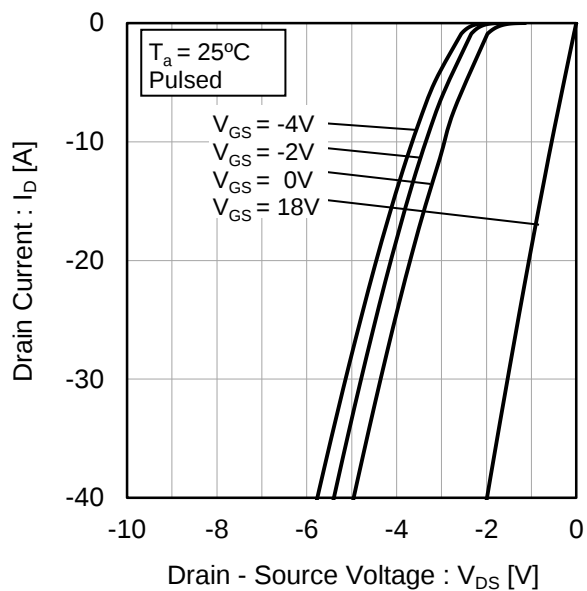


Fig.5 Typical Output Characteristics(II)

Fig.6  $T_j = 25^\circ\text{C}$  3rd Quadrant Characteristics

# ●Electrical characteristic curves

Fig.7  $T_j = 150^\circ\text{C}$  Typical Output Characteristics(I)

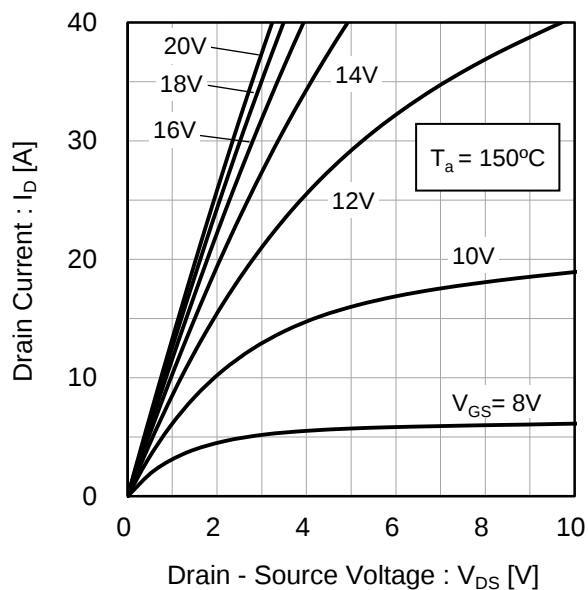


Fig.8  $T_j = 150^\circ\text{C}$  Typical Output Characteristics(II)

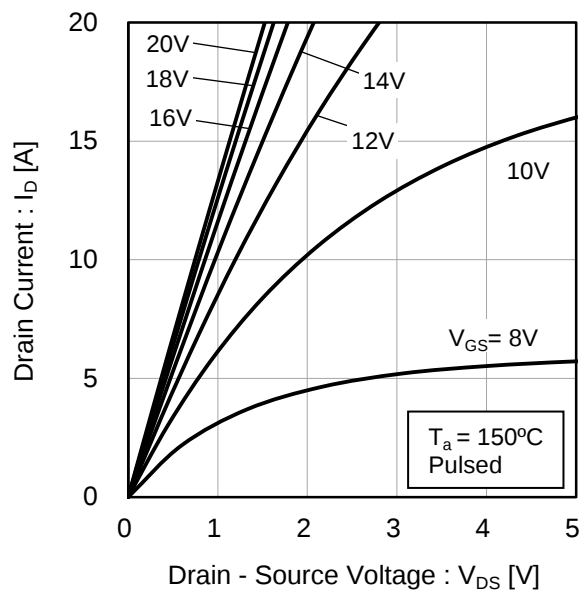


Fig.9  $T_j = 150^\circ\text{C}$  3rd Quadrant Characteristics


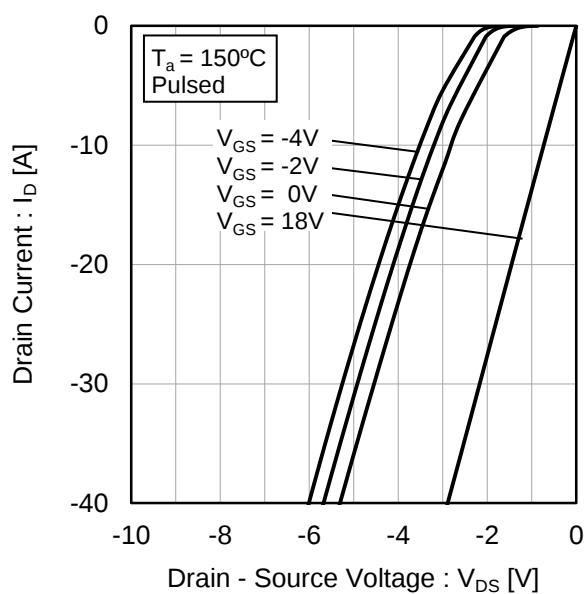


Fig.10 Body Diode Forward Voltage vs. Gate - Source Voltage

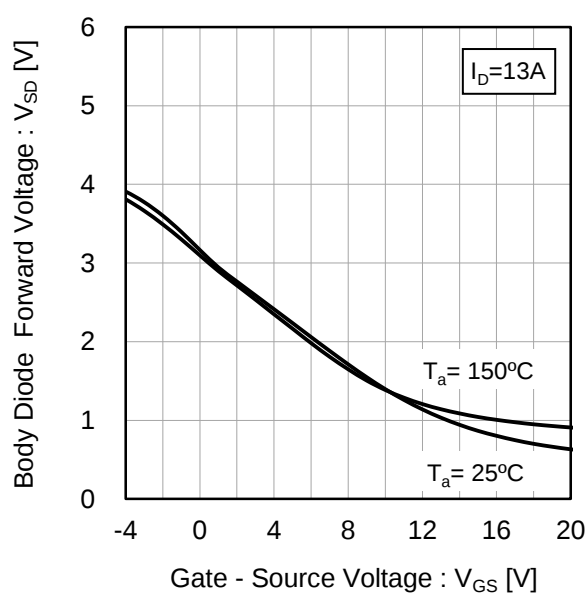

# ●Electrical characteristic curves

Fig.11 Typical Transfer Characteristics (I)

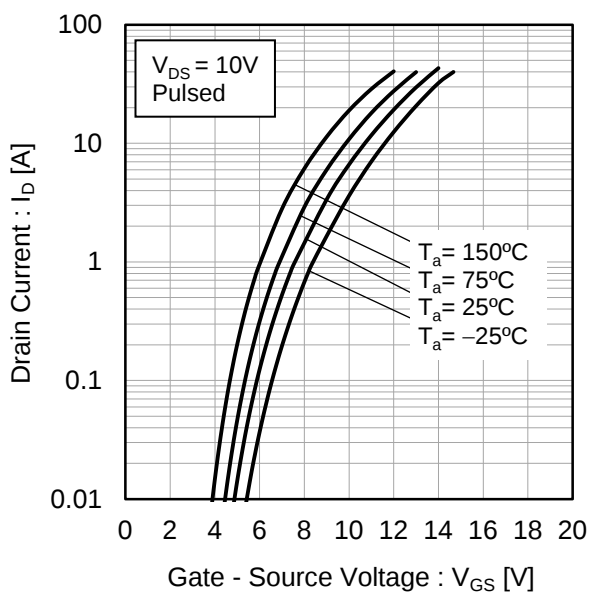


Fig.12 Typical Transfer Characteristics (II)

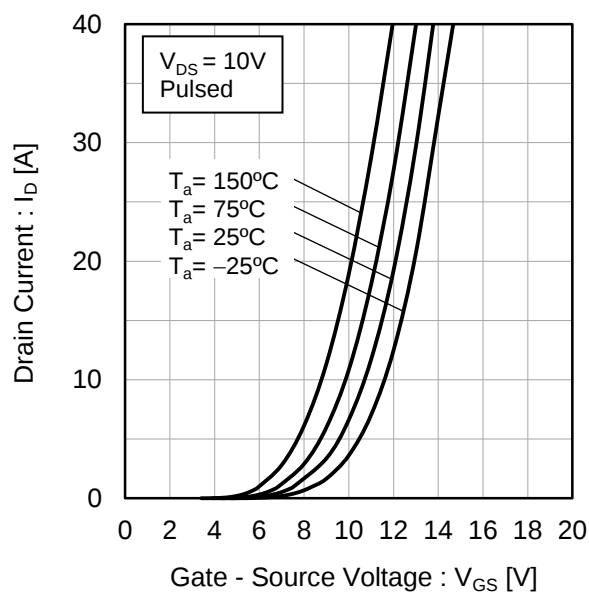


Fig.13 Gate Threshold Voltage vs. Junction Temperature


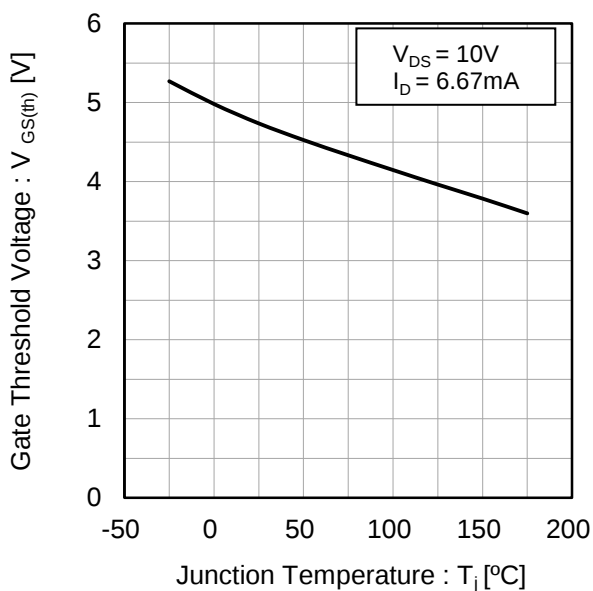


Fig.14 Transconductance vs. Drain Current

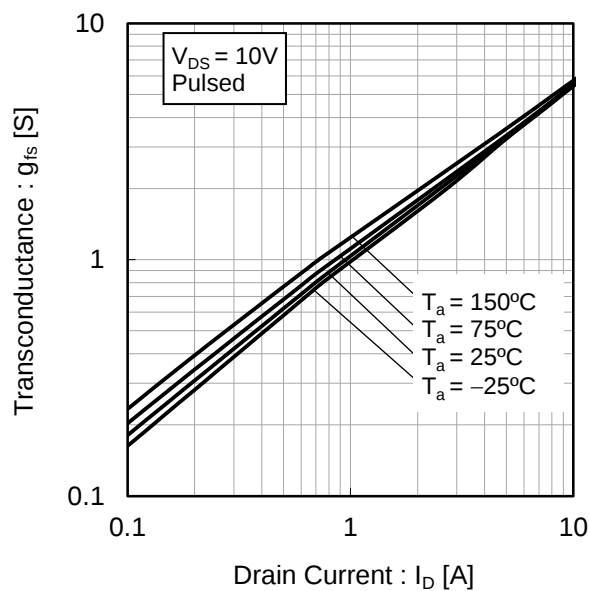

## ●Electrical characteristic curves

Fig.15 Static Drain - Source On - State Resistance vs. Gate - Source Voltage

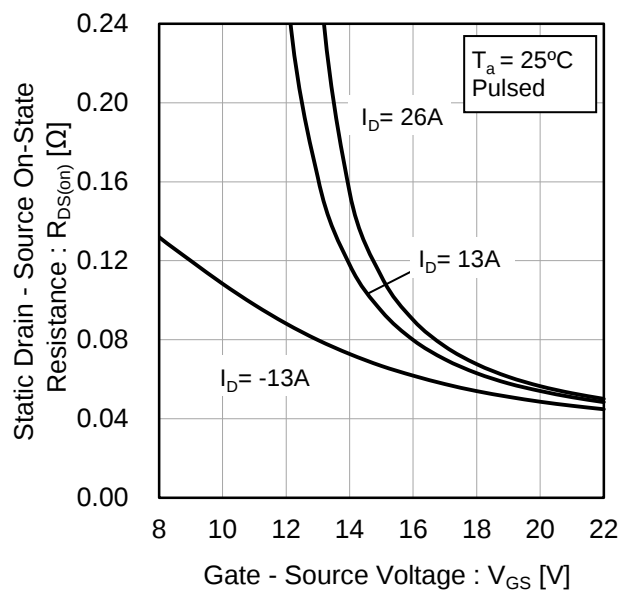


Fig.16 Static Drain - Source On - State Resistance vs. Junction Temperature

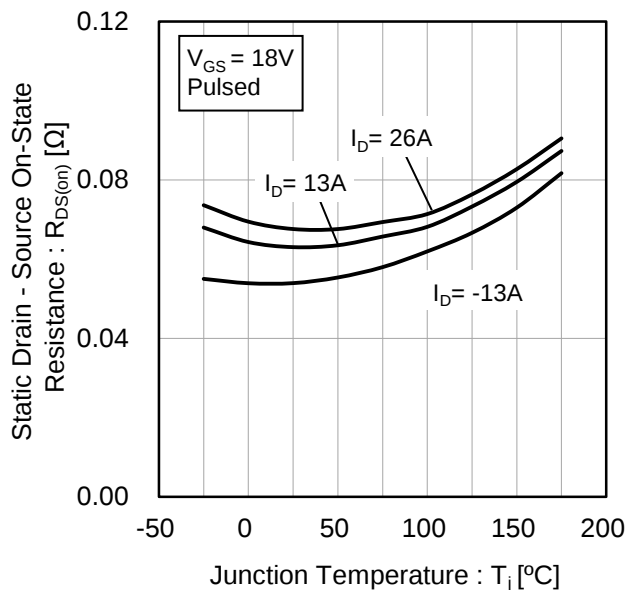


Fig.17 Static Drain - Source On - State Resistance vs. Drain Current


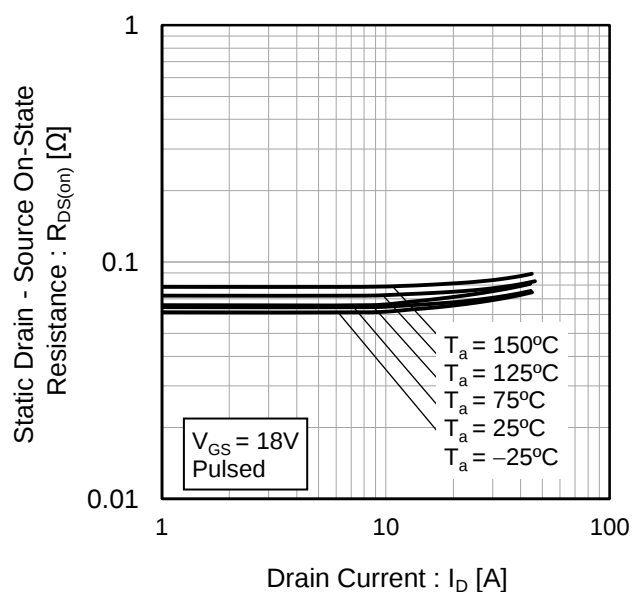


Fig.18 Normalized Drain - Source Breakdown Voltage vs. Junction Temperature

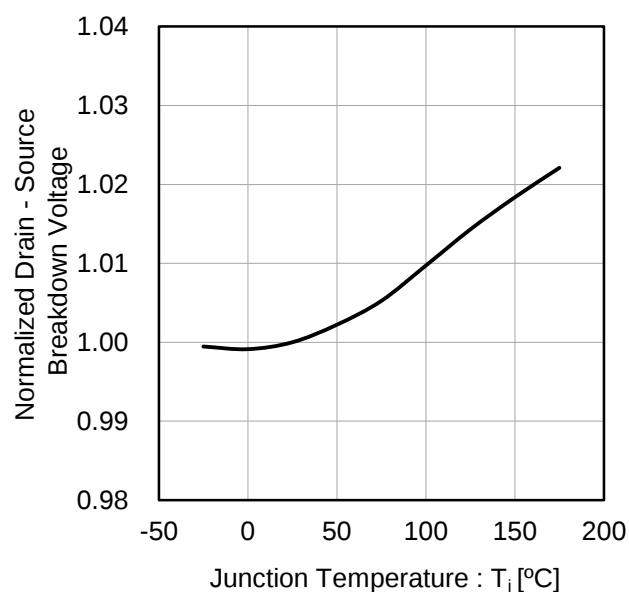

## ●Electrical characteristic curves

Fig.19 Typical Capacitance  
vs. Drain - Source Voltage

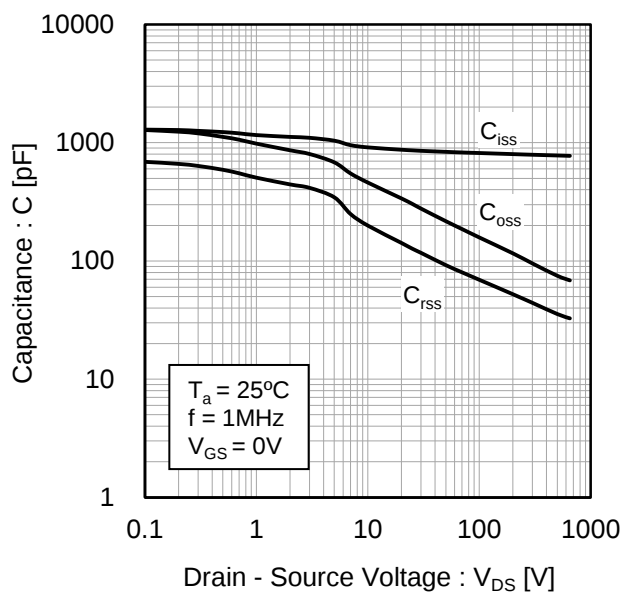


Fig.20  $C_{oss}$  Stored Energy



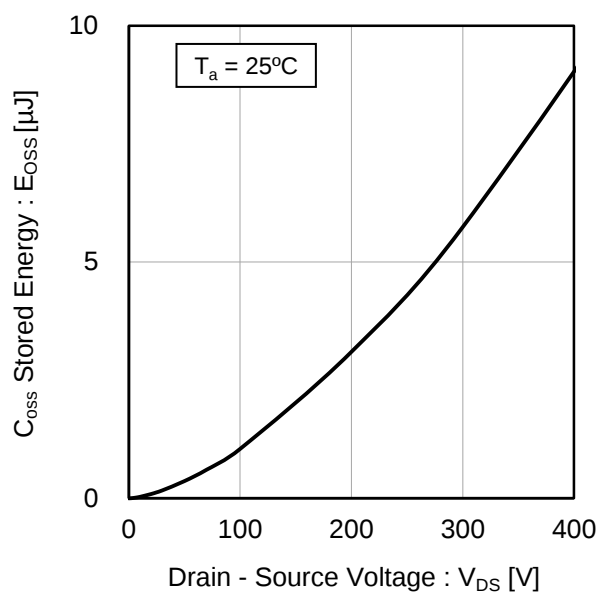


Fig.21 Dynamic Input Characteristics

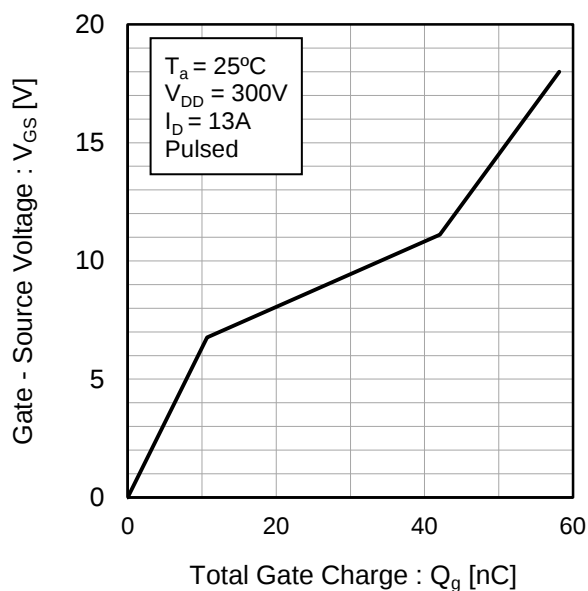

\*Gate Charge Waveform

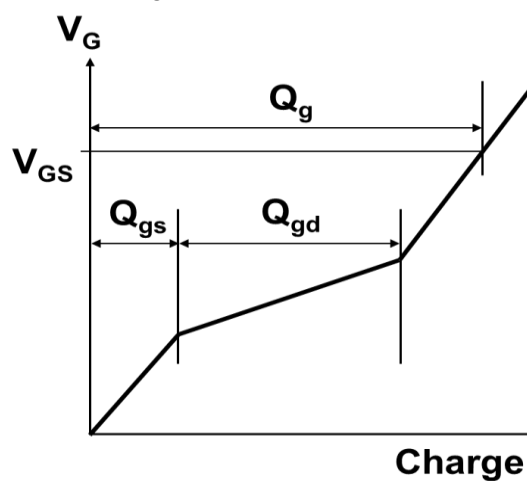

## ●Electrical characteristic curves

Fig.22 Typical Switching Time  
vs. External Gate Resistance

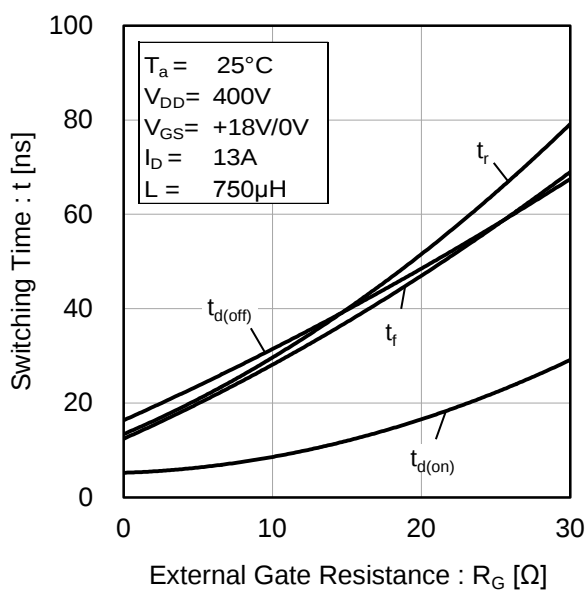


Fig.23 Typical Switching Loss  
vs. Drain - Source Voltage

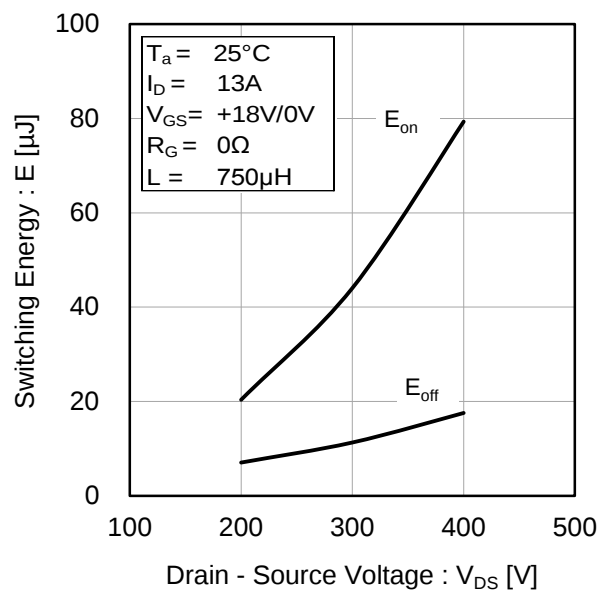


Fig.24 Typical Switching Loss  
vs. Drain Current


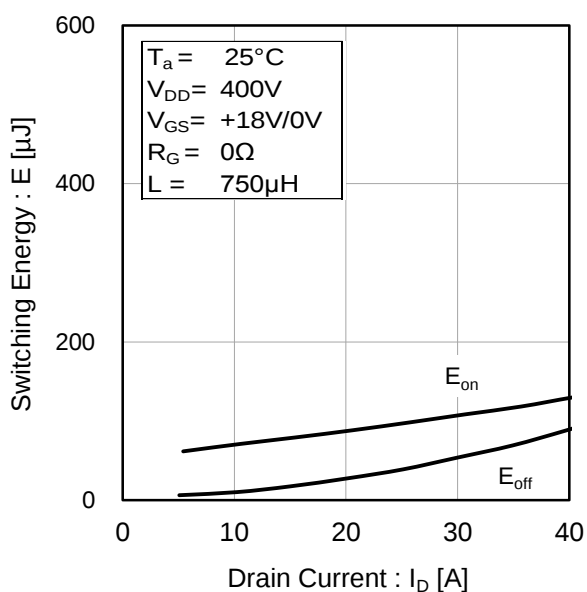


Fig.25 Typical Switching Loss  
vs. External Gate Resistance

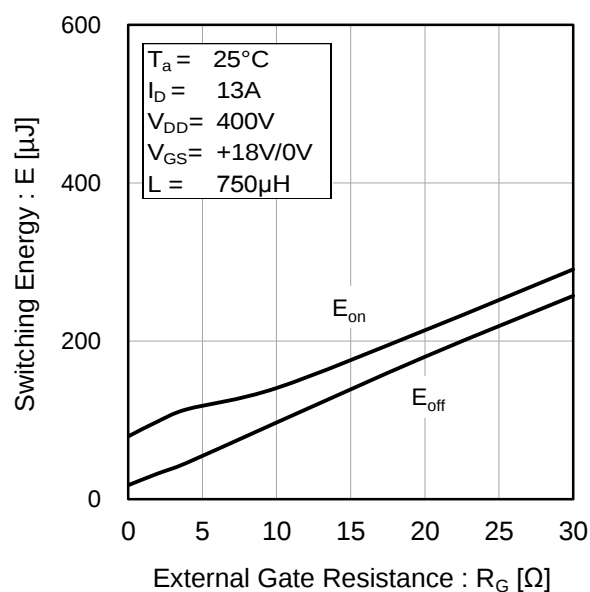

## ●Measurement circuits and waveforms

Fig.1-1 Gate Charge Measurement Circuit

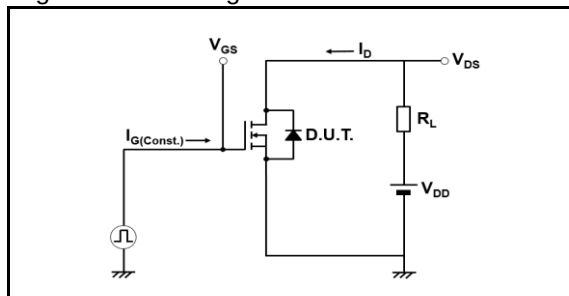


Fig.2-1 Switching Characteristics Measurement Circuit

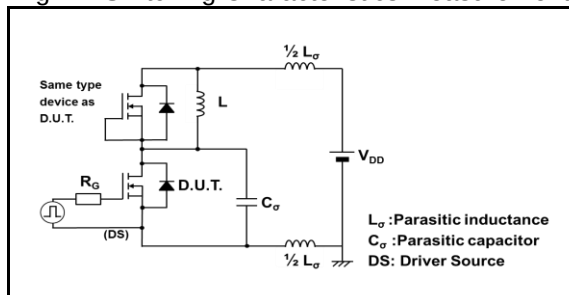


Fig.2-2 Waveforms for Switching Time

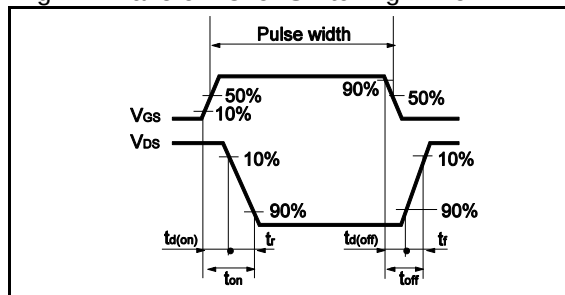


Fig.2-3 Waveforms for Switching Energy Loss

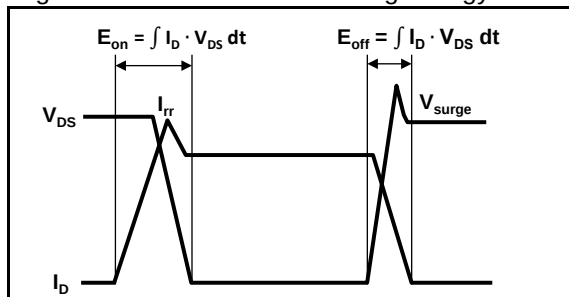


Fig.3-1 Reverse Recovery Time Measurement Circuit


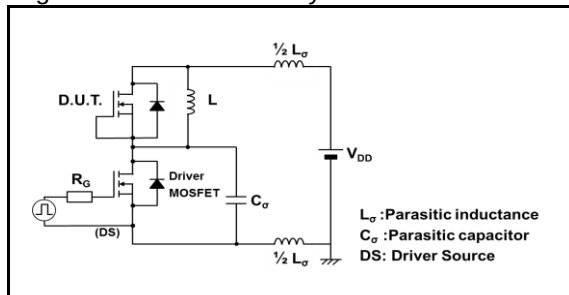


Fig.3-2 Reverse Recovery Waveform



## Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications.
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.  
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products specified in this document are not designed to be radiation tolerant.
- 7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.
- 8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 10) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.

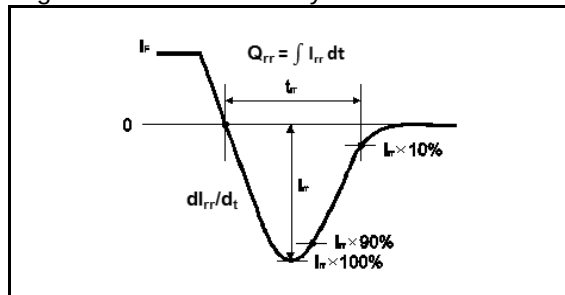

Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available, please contact us.

**ROHM Customer Support System**

<http://www.rohm.com/contact/>



## SCT3060AR - Web Page

[Distribution Inventory](#)

|                             |           |
|-----------------------------|-----------|
| Part Number                 | SCT3060AR |
| Package                     | TO-247-4L |
| Unit Quantity               | 450       |
| Minimum Package Quantity    | 30        |
| Packing Type                | Tube      |
| Constitution Materials List | inquiry   |
| RoHS                        | Yes       |