

BGB741L7ESD

Robust Low Noise Broadband RF Amplifier MMIC

Data Sheet

Revision 2.0, 2012-09-10

Edition 2012-09-10

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2012 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

BGB741L7ESD, ESD-Robust and Easy-To-Use Broadband LNA MMIC

Revision History: 2012-09-10, Rev. 2.0

Page	Subjects (major changes since last revision)
	This datasheet replaces the version from 2009-04-17. Neither the wafer production nor the package assembly have been changed. Only the product description and information available in the datasheet has been expanded and adjusted to the typical production.

Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EconoPACK™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I²RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OptiMOS™, ORIGA™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, µVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2011-11-11

Table of Contents

	Table of Contents	4
	List of Figures	5
	List of Tables	6
1	Product Brief	7
2	Features	7
3	Pin Configuration	8
4	Application Circuit	9
5	Operating Conditions	9
6	Maximum Ratings	10
7	Thermal Characteristics	11
8	Electrical Characteristics	12
8.1	DC Characteristics	12
8.2	DC Characteristics Under Varying Bias Conditions	13
8.3	AC Characteristics	15
9	Package Information	21

List of Figures

Figure 3-1	Pin Configuration	8
Figure 4-1	Functional Block Diagram.	9
Figure 7-1	Maximum Total Power Dissipation P_{tot} as Function of Temperature T_S at Soldering point	11
Figure 8-1	I_{CC} as a Function of R_{ext} , $V_{Ctrl} = 3\text{ V}$, V_{CC} as Parameter.	13
Figure 8-2	I_{CC} as a Function of V_{CC} , $V_{Ctrl} = 3\text{ V}$, R_{ext} as Parameter	13
Figure 8-3	I_{CC} as a Function of V_{Ctrl} , $V_{CC} = 3\text{ V}$, R_{ext} as Parameter	14
Figure 8-4	I_{CC} as a Function of Temperature, $V_{CC} = 3\text{ V}$, $V_{Ctrl} = 3\text{ V}$, $R_{ext} = \text{open}$	14
Figure 8-5	Testing Setup	15
Figure 9-1	Package Outline of TSLP-7-1	21
Figure 9-2	Foot Print of TSLP-7-1	21
Figure 9-3	Marking Layout of TSLP-7-1	21
Figure 9-4	Tape of TSLP-7-1.	21

List of Tables

Table 3-1	Pinning Table	8
Table 5-1	Operation Conditions	9
Table 6-1	Maximum Ratings at TA = 25°C (unless otherwise specified)	10
Table 7-1	Thermal Resistance	11
Table 8-1	DC characteristics at TA = 25 °C	12
Table 8-2	AC Characteristics, VC = 3 V, f = 150 MHz	15
Table 8-3	AC Characteristics, VC = 3 V, f = 450 MHz	16
Table 8-4	AC Characteristics, VC = 3 V, f = 900 MHz	16
Table 8-5	AC Characteristics, VC = 3 V, f = 1500 MHz	17
Table 8-6	AC Characteristics, VC = 3 V, f = 1900 MHz	17
Table 8-7	AC Characteristics, VC = 3 V, f = 2400 MHz	18
Table 8-8	AC Characteristics, VC = 3 V, f = 3500 MHz	19
Table 8-9	AC Characteristics, VC = 3 V, f = 5500 MHz	19

1 Product Brief

The BGB741L7ESD is a high performance low noise amplifier (LNA) MMIC based on Infineon's reliable high volume silicon germanium carbon (SiGe:C) bipolar technology. Its integrated feedback provides a broadband pre-match to $50\ \Omega$ at input and output up to 3.5 GHz and improves the stability against parasitic oscillations. These measures simplify the design of arbitrary LNA application circuits. The integrated active biasing reduces the external parts count and stabilizes the bias current against temperature- and process-variations. The integrated protection elements make the device robust against electrostatic discharge (ESD) and high RF input power levels. The device is highly flexible because the bias current is adjustable and the device works with a broad supply voltage range. The BGB741L7ESD comes in a Pb-free and halogen-free low profile TSLP-7-1 package.

2 Features

- High-performance broadband LNA MMIC for applications between 50 MHz and 5 GHz
- Integrated ESD protection: 2 kV HBM at all pins
- High RF input power robustness of 20 dBm
- Supply voltage range $V_{CC} = 1.8 - 4.0\text{ V}$
- Adjustable current between 5.5 mA to 30 mA by an external resistor
- Power-off function
- Excellent noise figure for a broadband LNA:
 $NF_{50} = 1.15\text{ dB}$ at 6 mA, 3 V, 2.4 GHz
- Very small, leadless, Pb-free (RoHS compliant) and halogen-free package TSLP-7-1, 2.0 x 1.3 x 0.4 mm
- Qualification report according to AEC-Q101 available



TSLP-7-1



Applications

Mobile TV, DAB, RKE, AMR, Cellular, ZigBee, WiMAX, SDARs, WiFi, Cordless phone, UMTS, WLAN

3 Pin Configuration

Type	Package	Marking
BGB741L7ESD	TSLP-7-1	AY

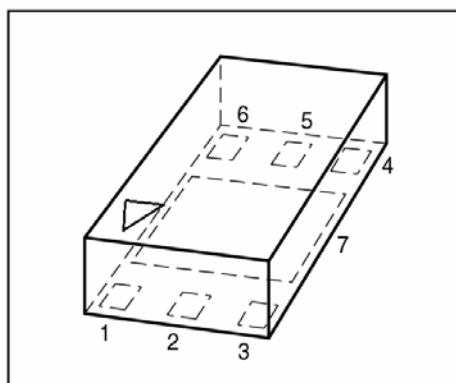


Figure 3-1 Pin Configuration

Table 3-1 Pinning Table

Pin	Function
1	V_{CC}
2	Bias-Out
3	RF-In
4	RF-Out
5	Control On/Off
6	Current Adjust
7	GND

4 Application Circuit

The following diagram shows the principal schematic how the BGB741L7ESD is used in a circuit. The power On/Off function is used by applying V_{Ctrl} . By applying an external resistor R_{ext} the pre-set minimum current of 5.5mA (which is adjusted by the integrated biasing when R_{ext} is omitted) can be increased. Base- and collector voltages are applied to the respective RFin- and RFout-pins by external inductors.

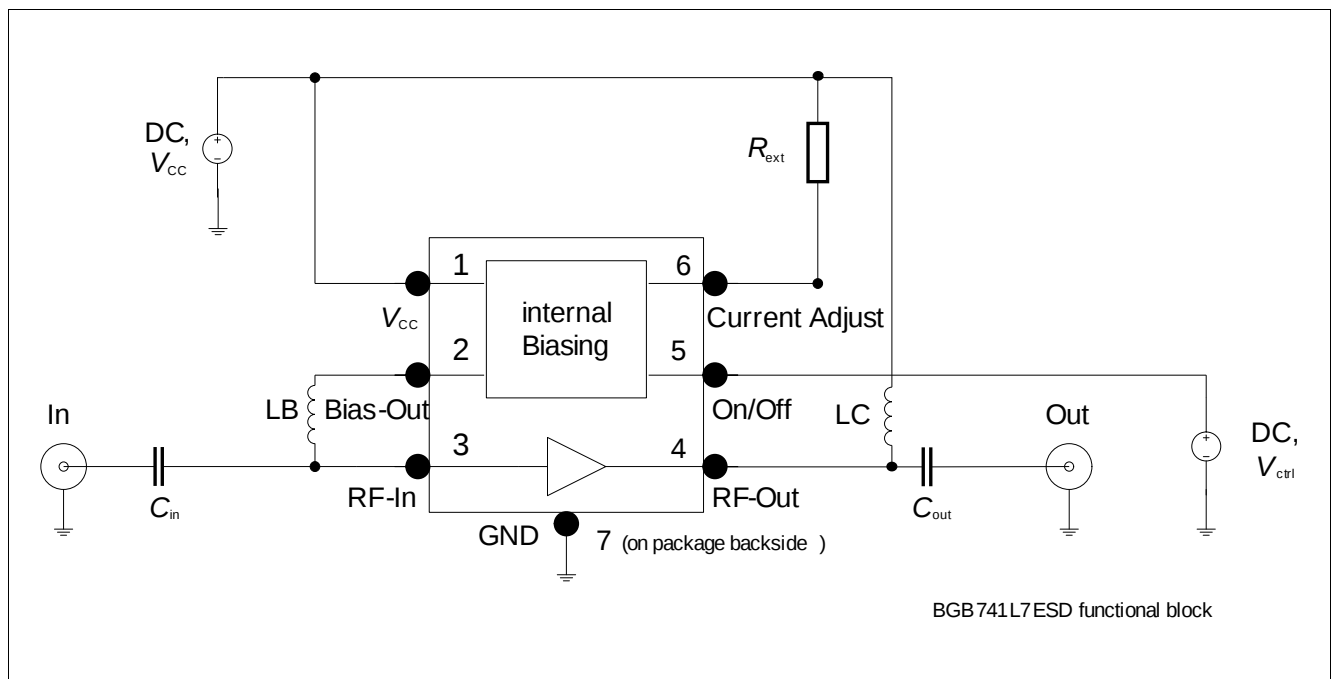


Figure 4-1 Functional Block Diagram

5 Operating Conditions

Table 5-1 Operation Conditions

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Supply voltage	V_{CC}	1.8	3.0	4.0	V	
Voltage Control On/Off pin in On mode	$V_{Ctrl-on}$	1.2	—	V_{CC}		
Voltage Control On/Off pin in Off mode	$V_{Ctrl-off}$	-0.3	—	0.3	V	

6 Maximum Ratings

Table 6-1 Maximum Ratings at $T_A = 25^\circ\text{C}$ (unless otherwise specified)

Parameter	Symbol	Value	Unit
Supply voltage $T_A = -55^\circ\text{C}$	V_{CC}	4.0 3.5	V
Supply current at V_{CC} pin	I_{CC}	30	mA
DC current at RF In pin	I_B	3	mA
Voltage at Control On / Off pin	V_{Ctrl}	V_{CC}	
ESD stress pulse (HBM)	V_{ESD}	+/-2	kV
RF input power	$P_{RF,in}$	20	dBm
Total power dissipation ¹⁾ $T_S < 117^\circ\text{C}$	P_{tot}	120	mW
Junction temperature	T_J	150	$^\circ\text{C}$
Storage temperature	T_{Stg}	-55...150	$^\circ\text{C}$

1) The soldering point temperature T_S measured at the GND pin (7) at the soldering point to the pcb

Note: Exceeding only one of the above maximum rating limits even for a short moment may cause permanent damage to the device. Even if the device continues to operate, its lifetime may be considerably shortened. Maximum ratings are stress ratings only and do not mean unaffected functional operation and lifetime at others than standard operating conditions

Attention: ESD (Electrostatic Discharge) sensitive device, observe handling precautions.

7 Thermal Characteristics

Table 7-1 Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}	275	K/W

1) For calculation of R_{thJA} please refer to Application Note AN077 (Thermal Resistance Calculation)

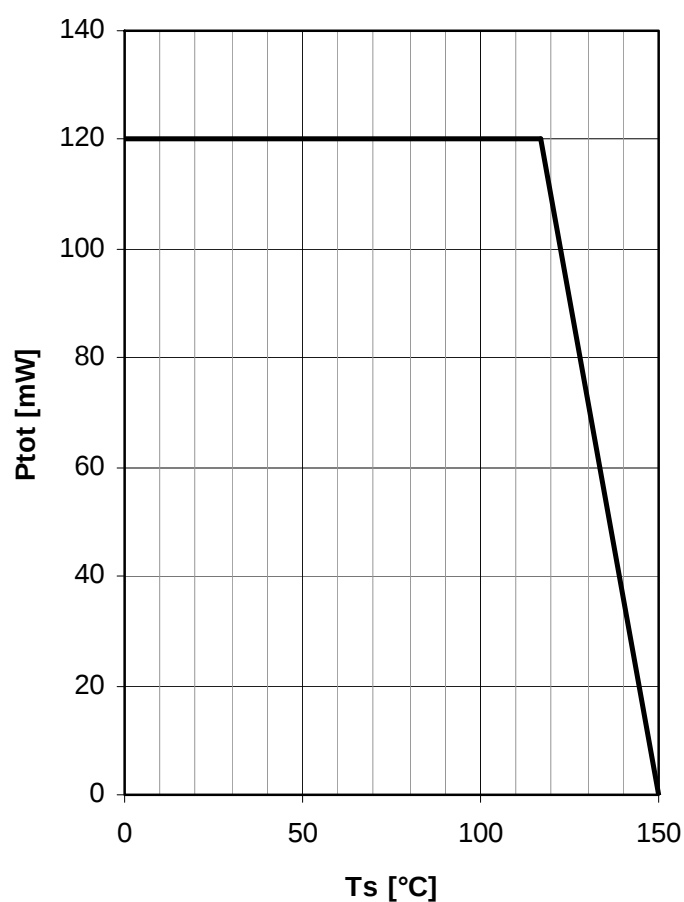


Figure 7-1 Maximum Total Power Dissipation P_{tot} as Function of Temperature T_s at Soldering point

8 Electrical Characteristics

8.1 DC Characteristics

Table 8-1 DC characteristics at $T_A = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Supply current in On-mode	I_{CC}	5.0 — —	5.5 6 10	6.5 — —	mA	$R_{ext} = \text{open}$ $R_{ext} = 30\text{ k}\Omega$ $R_{ext} = 3\text{ k}\Omega$ $V_{CC} = 3.0\text{ V}$ $V_{Ctrl} = 3.0\text{ V}$ (Small signal operation)
Supply current in Off mode	I_{CC-off}	—	—	6.0	μA	$V_{CC} = 3.0\text{ V}$ $V_{Ctrl} = 0\text{ V}$
Current into Control On/Off pin in On-mode	$I_{Ctrl-on}$	—	14	20	μA	$V_{CC} = 3.0\text{ V}$ $V_{Ctrl} = 3.0\text{ V}$
Current into Control On/Off pin in Off-mode	$I_{Ctrl-off}$	—	—	0.1	μA	$V_{CC} = 3.0\text{ V}$ $V_{Ctrl} = 0\text{ V}$

8.2 DC Characteristics Under Varying Bias Conditions

The measurement setup is an application circuit according to [Figure 4-1 “Functional Block Diagram” on Page 9](#) using the integrated biasing.

$T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

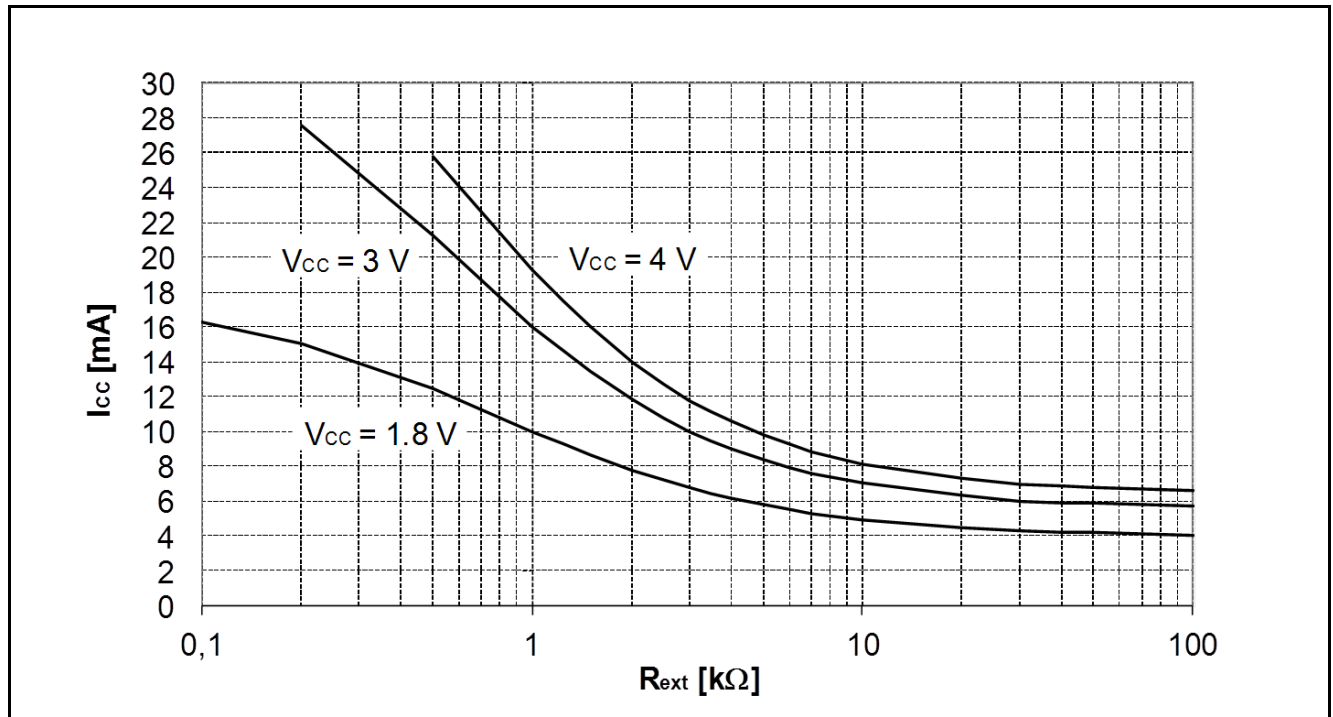


Figure 8-1 I_{CC} as a Function of R_{ext} , $V_{Ctrl} = 3\text{ V}$, V_{CC} as Parameter

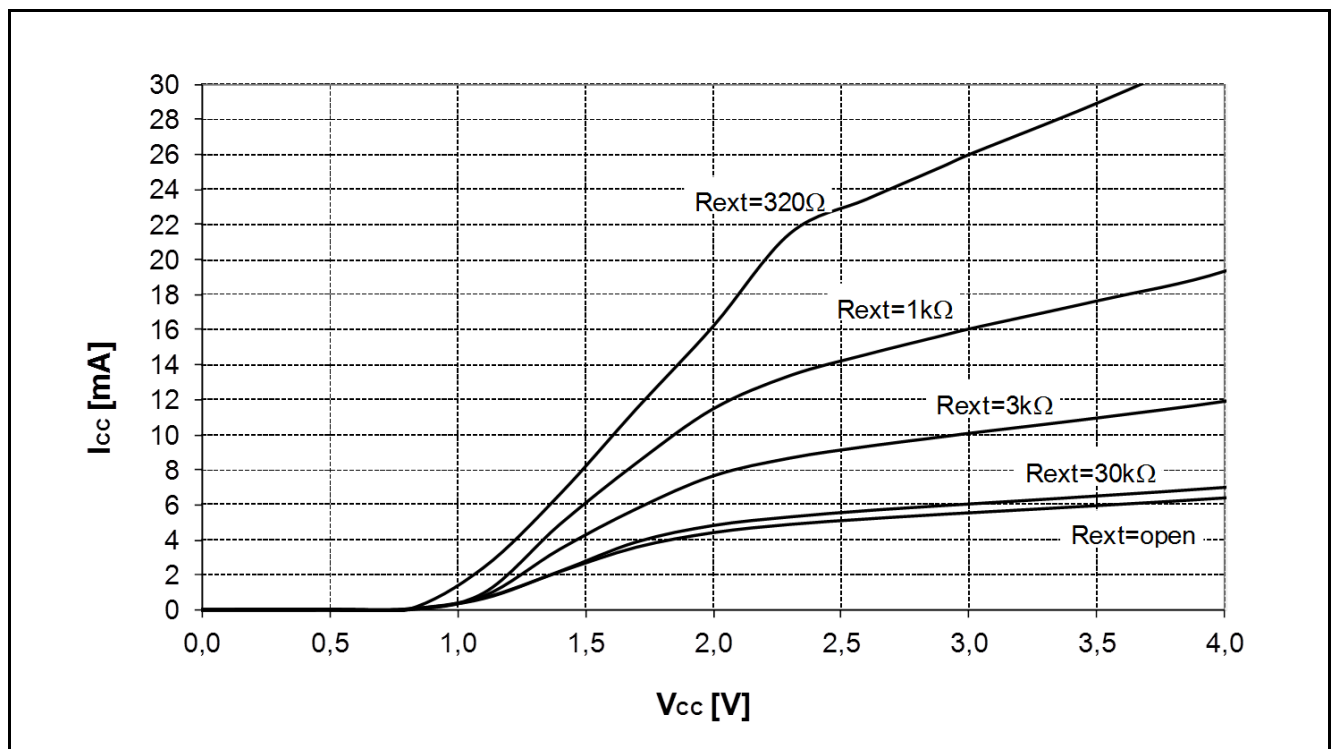


Figure 8-2 I_{CC} as a Function of V_{CC} , $V_{Ctrl} = 3\text{ V}$, R_{ext} as Parameter

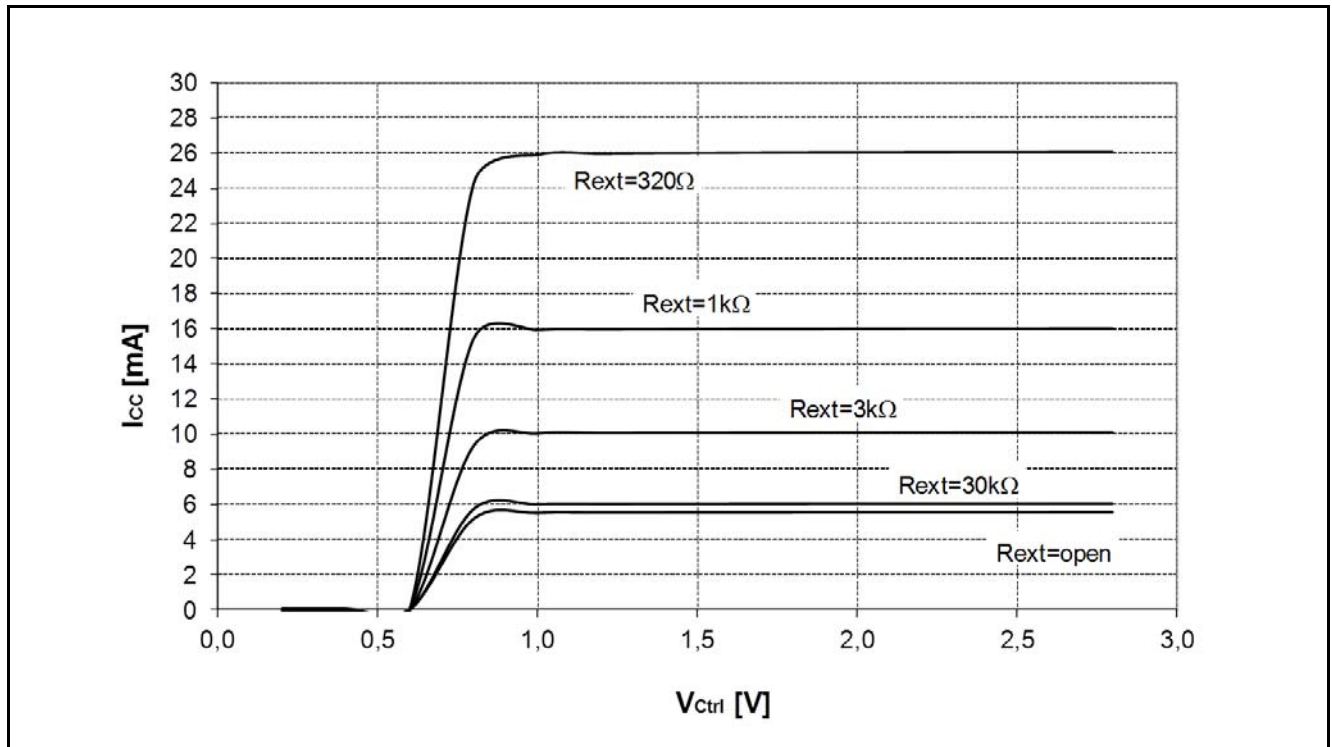


Figure 8-3 I_{CC} as a Function of V_{Ctrl} , $V_{CC} = 3\text{ V}$, R_{ext} as Parameter

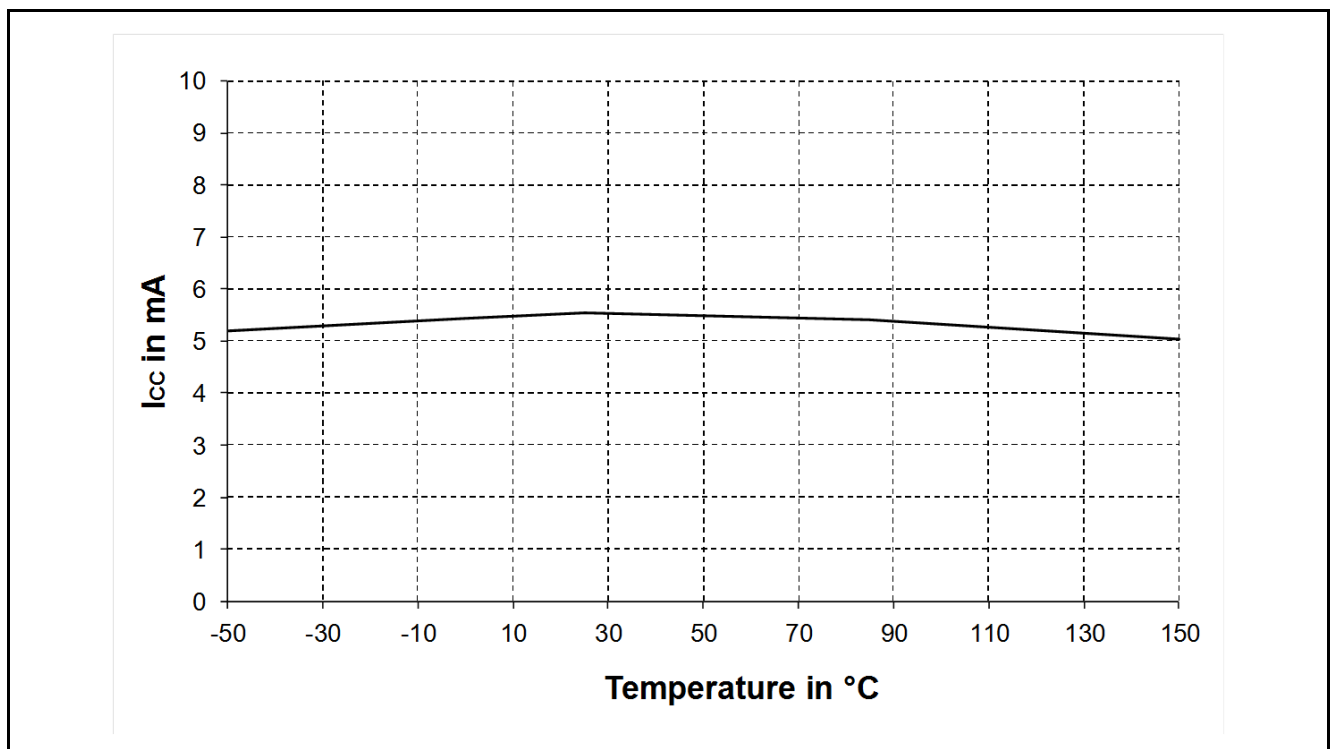


Figure 8-4 I_{CC} as a Function of Temperature, $V_{CC} = 3\text{ V}$, $V_{Ctrl} = 3\text{ V}$, $R_{ext} = open$

8.3 AC Characteristics

The measurement setup is a test fixture with Bias-T's in a $50\ \Omega$ system, $T_A = 25\ ^\circ\text{C}$.

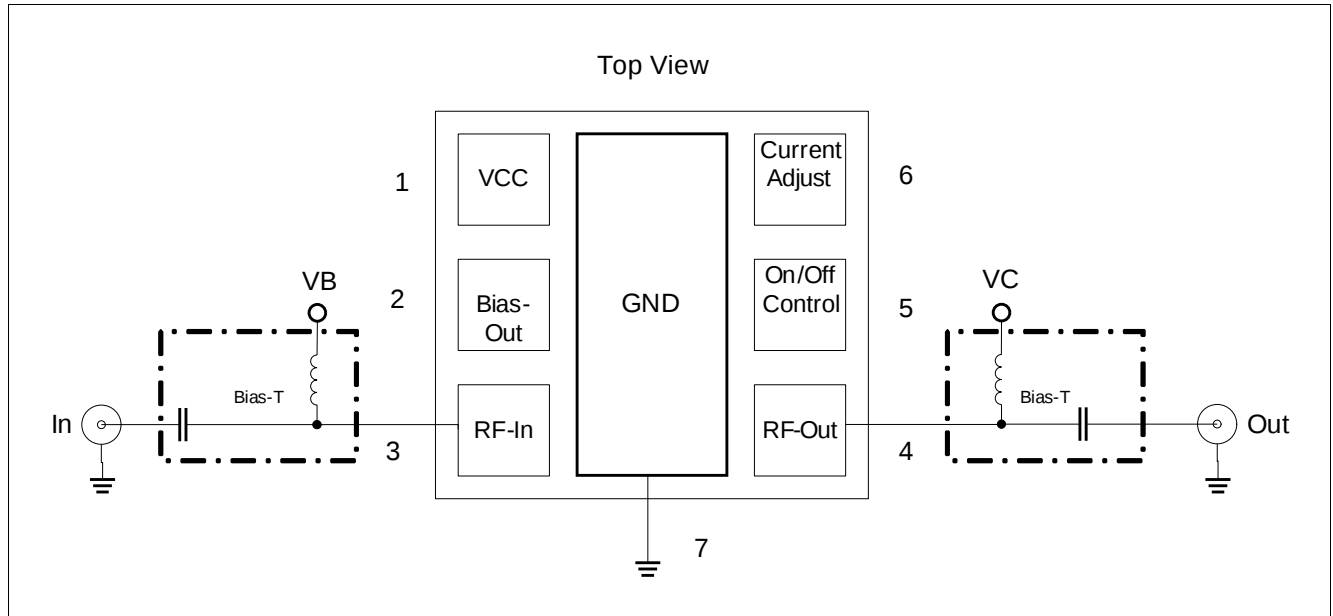


Figure 8-5 Testing Setup

Table 8-2 AC Characteristics, $V_C = 3\ \text{V}$, $f = 150\ \text{MHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Minimum Noise Figure ¹⁾	$NF_{\min}$	–	1.05	–	dB	$Z_S = Z_{\text{Sopt}}$ $I_C = 6\ \text{mA}$ $I_C = 10\ \text{mA}$
Noise Figure in $50\ \Omega$ System ¹⁾	NF_{50}	–	1.1	–	dB	$Z_S = Z_L = 50\ \Omega$ $I_C = 6\ \text{mA}$ $I_C = 10\ \text{mA}$
Transducer Gain	$ S_{21} ^2$	–	19	–	dB	$I_C = 6\ \text{mA}$ $I_C = 10\ \text{mA}$
Maximum Stable Power Gain	G_{ms}	–	20	–	dB	$Z_L = Z_{\text{Lopt}}, Z_S = Z_{\text{Sopt}}$ $I_C = 6\ \text{mA}$ $I_C = 10\ \text{mA}$
Input 1 dB Gain Compression Point ²⁾	$IP_{1\text{dB}}$	–	-5.5	–	dBm	$I_{\text{Cq}} = 6\ \text{mA}$ $I_{\text{Cq}} = 10\ \text{mA}$
Input 3 rd Order Intercept Point	IIP_3	–	5.5	–	dBm	$I_C = 6\ \text{mA}$ $I_C = 10\ \text{mA}$
Input Return Loss	RL_{in}	–	14	–	dB	$I_C = 6\ \text{mA}$ $I_C = 10\ \text{mA}$
Output Return Loss	RL_{out}	–	12.5	–	dB	$I_C = 6\ \text{mA}$ $I_C = 10\ \text{mA}$

Electrical Characteristics

Table 8-3 AC Characteristics, $V_C = 3\text{ V}$, $f = 450\text{ MHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Minimum Noise Figure ¹⁾	$NF_{\min}$	– –	1.05 0.95	– –	dB	$Z_S = Z_{\text{Sopt}}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Noise Figure in 50Ω System ¹⁾	NF_{50}	– –	1.1 1.05	– –	dB	$Z_S = Z_L = 50\Omega$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Transducer Gain	$ S_{21} ^2$	– –	18.5 20.5	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Maximum Available Power Gain	G_{ma}	– –	19 20.5	– –	dB	$Z_L = Z_{\text{Lopt}}, Z_S = Z_{\text{Sopt}}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input 1 dB Gain Compression Point ²⁾	$IP_{1\text{dB}}$	– –	-5 -7.5	– –	dBm	$I_{\text{Cq}} = 6\text{ mA}$ $I_{\text{Cq}} = 10\text{ mA}$
Input 3 rd Order Intercept Point	IIP_3	– –	4 2.5	– –	dBm	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input Return Loss	RL_{in}	– –	15.5 21	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Output Return Loss	RL_{out}	– –	14.5 28	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$

Table 8-4 AC Characteristics, $V_C = 3\text{ V}$, $f = 900\text{ MHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Minimum Noise Figure ¹⁾	$NF_{\min}$	– –	1.05 0.95	– –	dB	$Z_S = Z_{\text{Sopt}}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Noise Figure in 50Ω System ¹⁾	NF_{50}	– –	1.1 1.05	– –	dB	$Z_S = Z_L = 50\Omega$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Transducer Gain	$ S_{21} ^2$	– –	18.5 20	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Maximum Available Power Gain	G_{ma}	– –	19 20.5	– –	dB	$Z_L = Z_{\text{Lopt}}, Z_S = Z_{\text{Sopt}}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input 1 dB Gain Compression Point ²⁾	$IP_{1\text{dB}}$	– –	-5 -7	– –	dBm	$I_{\text{Cq}} = 6\text{ mA}$ $I_{\text{Cq}} = 10\text{ mA}$
Input 3 rd Order Intercept Point	IIP_3	– –	3 1.5	– –	dBm	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$

Electrical Characteristics

Table 8-4 AC Characteristics, $V_C = 3\text{ V}$, $f = 900\text{ MHz}$ (cont'd)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Input Return Loss	RL_{in}	—	15.5	—	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Output Return Loss	RL_{out}	—	14.5	—	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$

Table 8-5 AC Characteristics, $V_C = 3\text{ V}$, $f = 1500\text{ MHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Minimum Noise Figure ¹⁾	NF_{min}	—	1.05	—	dB	$Z_S = Z_{Sopt}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Noise Figure in 50Ω System ¹⁾	NF_{50}	—	1.1	—	dB	$Z_S = Z_L = 50\Omega$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Transducer Gain	$ S_{21} ^2$	—	18	—	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Maximum Available Power Gain	G_{ma}	—	18.5	—	dB	$Z_L = Z_{Lopt}$, $Z_S = Z_{Sopt}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input 1 dB Gain Compression Point ²⁾	IP_{1dB}	—	-4.5	—	dBm	$I_{Cq} = 6\text{ mA}$ $I_{Cq} = 10\text{ mA}$
Input 3 rd Order Intercept Point	IIP_3	—	2.5	—	dBm	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input Return Loss	RL_{in}	—	14.5	—	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Output Return Loss	RL_{out}	—	14	—	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$

Table 8-6 AC Characteristics, $V_C = 3\text{ V}$, $f = 1900\text{ MHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Minimum Noise Figure ¹⁾	NF_{min}	—	1.05	—	dB	$Z_S = Z_{Sopt}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Noise Figure in 50Ω System ¹⁾	NF_{50}	—	1.15	—	dB	$Z_S = Z_L = 50\Omega$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Transducer Gain	$ S_{21} ^2$	—	17.5	—	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$

Electrical Characteristics

Table 8-6 AC Characteristics, $V_C = 3\text{ V}$, $f = 1900\text{ MHz}$ (cont'd)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum Available Power Gain	G_{ma}	– –	18 19.5	– –	dB	$Z_L = Z_{Lopt}$, $Z_S = Z_{Sopt}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input 1 dB Gain Compression Point ²⁾	IP_{1dB}	– –	-4 -6	– –	dBm	$I_{Cq} = 6\text{ mA}$ $I_{Cq} = 10\text{ mA}$
Input 3 rd Order Intercept Point	IIP_3	– –	2.5 1	– –	dBm	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input Return Loss	RL_{in}	– –	13.5 15	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Output Return Loss	RL_{out}	– –	13.5 21	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$

Table 8-7 AC Characteristics, $V_C = 3\text{ V}$, $f = 2400\text{ MHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Minimum Noise Figure ¹⁾	NF_{min}	– –	1.1 1.05	– –	dB	$Z_S = Z_{Sopt}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Noise Figure in 50Ω System ¹⁾	NF_{50}	– –	1.15 1.1	– –	dB	$Z_S = Z_L = 50\Omega$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Transducer Gain	$ S_{21} ^2$	– –	17 18.5	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Maximum Available Power Gain	G_{ma}	– –	17.5 19	– –	dB	$Z_L = Z_{Lopt}$, $Z_S = Z_{Sopt}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input 1 dB Gain Compression Point ²⁾	IP_{1dB}	– –	-3.5 -5.5	– –	dBm	$I_{Cq} = 6\text{ mA}$ $I_{Cq} = 10\text{ mA}$
Input 3 rd Order Intercept Point	IIP_3	– –	3 1	– –	dBm	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input Return Loss	RL_{in}	– –	12.5 13.5	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Output Return Loss	RL_{out}	– –	12.5 18	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$

Electrical Characteristics

Table 8-8 AC Characteristics, $V_C = 3\text{ V}$, $f = 3500\text{ MHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Minimum Noise Figure ¹⁾	$NF_{\min}$	– –	1.25 1.2	– –	dB	$Z_S = Z_{\text{Sopt}}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Noise Figure in 50Ω System ¹⁾	NF_{50}	– –	1.35 1.25	– –	dB	$Z_S = Z_L = 50\Omega$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Transducer Gain	$ S_{21} ^2$	– –	15 16.5	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Maximum Available Power Gain	G_{ma}	– –	16 17.5	– –	dB	$Z_L = Z_{\text{Lopt}}, Z_S = Z_{\text{Sopt}}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input 1 dB Gain Compression Point ²⁾	$IP_{1\text{dB}}$	– –	-2.5 -4.5	– –	dBm	$I_{\text{Cq}} = 6\text{ mA}$ $I_{\text{Cq}} = 10\text{ mA}$
Input 3 rd Order Intercept Point	IIP_3	– –	3.5 1.5	– –	dBm	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input Return Loss	RL_{in}	– –	10 10.5	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Output Return Loss	RL_{out}	– –	10 13.5	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$

Table 8-9 AC Characteristics, $V_C = 3\text{ V}$, $f = 5500\text{ MHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Minimum Noise Figure ¹⁾	$NF_{\min}$	– –	1.8 1.75	– –	dB	$Z_S = Z_{\text{Sopt}}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Noise Figure in 50Ω System ¹⁾	NF_{50}	– –	1.95 1.85	– –	dB	$Z_S = Z_L = 50\Omega$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Transducer Gain	$ S_{21} ^2$	– –	12 13	– –	dB	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Maximum Available Power Gain	G_{ma}	– –	14 15	– –	dB	$Z_L = Z_{\text{Lopt}}, Z_S = Z_{\text{Sopt}}$ $I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$
Input 1 dB Gain Compression Point ²⁾	$IP_{1\text{dB}}$	– –	-1 -3	– –	dBm	$I_{\text{Cq}} = 6\text{ mA}$ $I_{\text{Cq}} = 10\text{ mA}$
Input 3 rd Order Intercept Point	IIP_3	– –	8.5 4	– –	dBm	$I_C = 6\text{ mA}$ $I_C = 10\text{ mA}$



Electrical Characteristics

Table 8-9 AC Characteristics, $V_C = 3\text{ V}$, $f = 5500\text{ MHz}$ (cont'd)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Input Return Loss	RL_{in}	–	7	–	dB	$I_C = 6\text{ mA}$
		–	8	–		$I_C = 10\text{ mA}$
Output Return Loss	RL_{out}	–	7	–	dB	$I_C = 6\text{ mA}$
		–	8.5	–		$I_C = 10\text{ mA}$

- 1) Test fixture losses extracted
- 2) Measured on an application board according to [Figure 4-1 “Functional Block Diagram” on Page 9](#) presenting a $50\ \Omega$ system to the device. IC_q is the quiescent current, that is at small RF input power level. I_C increases as RF input power level approaches P1dB.

9 Package Information



www.infineon.com

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com