

## *CC1000*

# Single Chip Very Low Power RF Transceiver

### Applications

- *Very low power UHF wireless data transmitters and receivers*
- *315 / 433 / 868 and 915 MHz ISM/SRD band systems*
- *RKE – Two-way Remote Keyless Entry*
- *Home automation*
- *Wireless alarm and security systems*
- *AMR – Automatic Meter Reading*
- *Low power telemetry*
- *Game Controllers and advanced toys*

### Product Description

*CC1000* is a true single-chip UHF transceiver designed for very low power and very low voltage wireless applications. The circuit is mainly intended for the ISM (Industrial, Scientific and Medical) and SRD (Short Range Device) frequency bands at 315, 433, 868 and 915 MHz, but can easily be programmed for operation at other frequencies in the 300-1000 MHz range.

The main operating parameters of *CC1000* can be programmed via a serial bus, thus making *CC1000* a very flexible and easy to use transceiver. In a typical system *CC1000* will be used together with a microcontroller and a few external passive components.

*CC1000* is based on Chipcon's SmartRF® technology in 0.35 µm CMOS.



### Features

- True single chip UHF RF transceiver
- Very low current consumption
- Frequency range 300 – 1000 MHz
- Integrated bit synchroniser
- High sensitivity (typical -110 dBm at 2.4 kBaud)
- Programmable output power –20 to 10 dBm
- Small size (TSSOP-28 or UltraCSP™ package)
- Low supply voltage (2.1 V to 3.6 V)
- Very few external components required
- No external RF switch / IF filter required
- RSSI output
- Single port antenna connection
- FSK data rate up to 76.8 kBaud
- Complies with EN 300 220 and FCC CFR47 part 15
- Programmable frequency in 250 Hz steps makes crystal temperature drift compensation possible without TCXO
- Suitable for frequency hopping protocols
- Development kit available
- Easy-to-use software for generating the *CC1000* configuration data

## Table of Contents

|                                                                         |    |
|-------------------------------------------------------------------------|----|
| <i>CC1000</i> .....                                                     | 1  |
| Single Chip Very Low Power RF Transceiver.....                          | 1  |
| 1. Absolute Maximum Ratings.....                                        | 4  |
| 2. Operating Conditions .....                                           | 4  |
| 3. Electrical Specifications.....                                       | 4  |
| 4. Pin Assignment.....                                                  | 8  |
| 5. Circuit Description.....                                             | 9  |
| 6. Application Circuit.....                                             | 10 |
| 6.1 Input / output matching.....                                        | 10 |
| 6.2 VCO inductor.....                                                   | 10 |
| 6.3 Additional filtering.....                                           | 10 |
| 6.4 Power supply decoupling .....                                       | 10 |
| 7. Configuration Overview .....                                         | 12 |
| 8. Configuration Software .....                                         | 12 |
| 9. 3-wire Serial Configuration Interface .....                          | 13 |
| Note: The set-up- and hold-times refer to 50% of VDD.....               | 14 |
| 10. Microcontroller Interface.....                                      | 15 |
| 10.1 Connecting the microcontroller .....                               | 15 |
| 11. Signal interface .....                                              | 16 |
| 11.1 Manchester encoding and decoding .....                             | 16 |
| 12. Bit synchroniser and data decision .....                            | 19 |
| 13. Receiver sensitivity versus data rate and frequency separation..... | 22 |
| 14. Frequency programming.....                                          | 23 |
| 15. Recommended RX settings for ISM frequencies .....                   | 24 |
| 16. VCO .....                                                           | 25 |
| 17. VCO and PLL self-calibration.....                                   | 25 |
| 18. VCO and LNA current control.....                                    | 28 |
| 19. Power management.....                                               | 28 |


|                                                      |           |
|------------------------------------------------------|-----------|
| <b>20. Input / Output Matching.....</b>              | <b>31</b> |
| <b>21. Output power programming .....</b>            | <b>32</b> |
| <b>22. RSSI output .....</b>                         | <b>33</b> |
| <b>23. IF output .....</b>                           | <b>34</b> |
| <b>24. Crystal oscillator .....</b>                  | <b>35</b> |
| <b>25. Optional LC Filter.....</b>                   | <b>36</b> |
| <b>26. System Considerations and Guidelines.....</b> | <b>37</b> |
| 26.1 SRD regulations .....                           | 37        |
| 26.2 Low cost systems.....                           | 37        |
| 26.3 Battery operated systems.....                   | 37        |
| 26.4 Crystal drift compensation.....                 | 37        |
| 26.5 High reliability systems.....                   | 37        |
| 26.6 Frequency hopping spread spectrum systems.....  | 37        |
| <b>27. PCB Layout Recommendations.....</b>           | <b>38</b> |
| <b>28. Antenna Considerations.....</b>               | <b>38</b> |
| <b>L = 7125 / f .....</b>                            | <b>38</b> |
| <b>29. Configuration registers .....</b>             | <b>39</b> |
| <b>30. Package Description (TSSOP-28) .....</b>      | <b>48</b> |
| <b>31. Package Description (UltraCSP™) .....</b>     | <b>49</b> |
| <b>32. Plastic Tube Specification .....</b>          | <b>51</b> |
| <b>33. Waffle Pack Specification .....</b>           | <b>51</b> |
| <b>34. Carrier Tape and Reel Specification.....</b>  | <b>51</b> |
| <b>35. Ordering Information .....</b>                | <b>52</b> |
| <b>36. General Information.....</b>                  | <b>52</b> |
| 36.1 Document Revision History .....                 | 52        |
| 36.2 Product Status Definitions.....                 | 52        |
| <b>37. Address Information.....</b>                  | <b>54</b> |
| <b>38. TI Worldwide Technical Support .....</b>      | <b>54</b> |
| <b>39. Product Information Centers .....</b>         | <b>54</b> |

## 1. Absolute Maximum Ratings

| Parameter                                     | Min. | Max.                | Units | Condition                                |
|-----------------------------------------------|------|---------------------|-------|------------------------------------------|
| Supply voltage, VDD                           | -0.3 | 5.0                 | V     |                                          |
| Voltage on any pin                            | -0.3 | VDD+0.3,<br>max 5.0 | V     |                                          |
| Input RF level                                |      | 10                  | dBm   |                                          |
| Storage temperature range (TSSOP)             | -50  | 150                 | °C    |                                          |
| Shelf life (UltraCSP™)                        |      | 1                   | year  | Room temperature and oxygen free cabinet |
| Reflow soldering temperature (TSSOP)          |      | 260                 | °C    | IPC/JEDEC J-STD-020C                     |
| Peak reflow soldering temperature (UltraCSP™) |      | 255                 | °C    | IPC/JEDEC J-STD-020C                     |

Under no circumstances the absolute maximum ratings given above should be violated. Stress exceeding one or more of

the limiting values may cause permanent damage to the device.



**Caution!** ESD sensitive device.  
Precaution should be used when handling the device in order to prevent permanent damage.

## 2. Operating Conditions

| Parameter                           | Min. | Typ. | Max. | Unit | Condition / Note                                                                           |
|-------------------------------------|------|------|------|------|--------------------------------------------------------------------------------------------|
| RF Frequency Range                  | 300  |      | 1000 | MHz  | Programmable in steps of 250 Hz                                                            |
| Operating ambient temperature range | -40  |      | 85   | °C   |                                                                                            |
| Supply voltage                      | 2.1  | 3.0  | 3.6  | V    | Note: The same supply voltage should be used for digital (DVDD) and analogue (AVDD) power. |

## 3. Electrical Specifications

T<sub>c</sub> = 25°C, VDD = 3.0 V if nothing else stated

| Parameter                       | Min. | Typ. | Max. | Unit  | Condition / Note                                                                                                                                                                                        |
|---------------------------------|------|------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Transmit Section</b>         |      |      |      |       |                                                                                                                                                                                                         |
| Transmit data rate              | 0.6  |      | 76.8 | kBaud | NRZ or Manchester encoding. 76.8 kBaud equals 76.8 kbit/s using NRZ coding. See page 16.                                                                                                                |
| Binary FSK frequency separation | 0    |      | 65   | kHz   | The frequency separation is programmable in 250 Hz steps. 65 kHz is the maximum guaranteed separation at 1 MHz reference frequency. Larger separations can be achieved at higher reference frequencies. |

| Parameter                                                                                          | Min.       | Typ.                               | Max.    | Unit                                         | Condition / Note                                                                                                                                  |
|----------------------------------------------------------------------------------------------------|------------|------------------------------------|---------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Output power<br>433 MHz<br>868 MHz                                                                 | -20<br>-20 |                                    | 10<br>5 | dBm<br>dBm                                   | Delivered to 50 $\Omega$ load.<br>The output power is programmable.                                                                               |
| RF output impedance<br>433/868 MHz                                                                 |            | 140 / 80                           |         | $\Omega$                                     | Transmit mode. For matching details see "Input/ output matching" p.31.                                                                            |
| Harmonics                                                                                          |            | -20                                |         | dBc                                          | An external LC or SAW filter should be used to reduce harmonics emission to comply with SRD requirements. See p.36.                               |
| <b>Receive Section</b>                                                                             |            |                                    |         |                                              |                                                                                                                                                   |
| Receiver Sensitivity, 433 MHz<br>Optimum sensitivity (9.3 mA)<br>Low current consumption (7.4 mA)  |            | -110<br>-109                       |         | dBm<br>dBm                                   | 2.4 kBaud, Manchester coded data, 64 kHz frequency separation, BER = $10^{-3}$                                                                    |
| Receiver Sensitivity, 868 MHz<br>Optimum sensitivity (11.8 mA)<br>Low current consumption (9.6 mA) |            | -107<br>-105                       |         | dBm<br>dBm                                   | See Table 6 and Table 7 page 22 for typical sensitivity figures at other data rates.                                                              |
| System noise bandwidth                                                                             |            | 30                                 |         | kHz                                          | 2.4 kBaud, Manchester coded data                                                                                                                  |
| Cascaded noise figure<br>433/868 MHz                                                               |            | 12/13                              |         | dB                                           |                                                                                                                                                   |
| Saturation                                                                                         | 10         |                                    |         | dBm                                          | 2.4 kBaud, Manchester coded data, BER = $10^{-3}$                                                                                                 |
| Input IP3                                                                                          |            | -18                                |         | dBm                                          | From LNA to IF output                                                                                                                             |
| Blocking                                                                                           |            | 40                                 |         | dBc                                          | At +/- 1 MHz                                                                                                                                      |
| LO leakage                                                                                         |            |                                    | -57     | dBm                                          |                                                                                                                                                   |
| Input impedance                                                                                    |            | 88-j26<br>70-j26<br>52-j7<br>52-j4 |         | $\Omega$<br>$\Omega$<br>$\Omega$<br>$\Omega$ | Receive mode, series equivalent at 315 MHz<br>at 433 MHz<br>at 868 MHz.<br>At 915 MHz<br>For matching details see "Input/ output matching" p. 31. |
| Turn on time                                                                                       | 11         |                                    | 128     | Baud                                         | The turn-on time is determined by the demodulator settling time, which is programmable. See p. 19                                                 |
| <b>IF Section</b>                                                                                  |            |                                    |         |                                              |                                                                                                                                                   |
| Intermediate frequency (IF)                                                                        |            | 150                                | 10.7    | kHz<br>MHz                                   | Internal IF filter<br>External IF filter                                                                                                          |
| IF bandwidth                                                                                       |            | 175                                |         | kHz                                          |                                                                                                                                                   |
| RSSI dynamic range                                                                                 | -105       |                                    | -50     | dBm                                          |                                                                                                                                                   |
| RSSI accuracy                                                                                      |            | $\pm 6$                            |         | dB                                           | See p.33 for details                                                                                                                              |
| RSSI linearity                                                                                     |            | $\pm 2$                            |         | dB                                           |                                                                                                                                                   |


| Parameter                                                    | Min.    | Typ.                 | Max.    | Unit    | Condition / Note                                                                                                                                                    |
|--------------------------------------------------------------|---------|----------------------|---------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frequency Synthesiser Section</b>                         |         |                      |         |         |                                                                                                                                                                     |
| Crystal Oscillator Frequency                                 | 3       |                      | 16      | MHz     | Crystal frequency can be 3-4, 6-8 or 9-16 MHz. Recommended frequencies are 3.6864, 7.3728, 11.0592 and 14.7456. See page 35 for details.                            |
| Crystal frequency accuracy requirement                       |         | $\pm 50$<br>$\pm 25$ |         | ppm     | 433 MHz<br>868 MHz<br>The crystal frequency accuracy and drift (ageing and temperature dependency) will determine the frequency accuracy of the transmitted signal. |
| Crystal operation                                            |         | Parallel             |         |         | C171 and C181 are loading capacitors, see page 35                                                                                                                   |
| Crystal load capacitance                                     | 12      | 22                   | 30      | pF      | 3-4 MHz, 22 pF recommended                                                                                                                                          |
|                                                              | 12      | 16                   | 30      | pF      | 6-8 MHz, 16 pF recommended                                                                                                                                          |
|                                                              | 12      | 16                   | 16      | pF      | 9-16 MHz, 16 pF recommended                                                                                                                                         |
| Crystal oscillator start-up time                             |         | 5                    |         | ms      | 3.6864 MHz, 16 pF load                                                                                                                                              |
|                                                              |         | 1.5                  |         | ms      | 7.3728 MHz, 16 pF load                                                                                                                                              |
|                                                              |         | 2                    |         | ms      | 16 MHz, 16 pF load                                                                                                                                                  |
| Output signal phase noise                                    |         | -85                  |         | dBc/Hz  | At 100 kHz offset from carrier                                                                                                                                      |
| PLL lock time (RX / TX turn time)                            |         | 200                  |         | $\mu$ s | Up to 1 MHz frequency step                                                                                                                                          |
| PLL turn-on time, crystal oscillator on in power down mode   |         | 250                  |         | $\mu$ s | Crystal oscillator running                                                                                                                                          |
| <b>Digital Inputs/Outputs</b>                                |         |                      |         |         |                                                                                                                                                                     |
| Logic "0" input voltage                                      | 0       |                      | 0.3*VDD | V       |                                                                                                                                                                     |
| Logic "1" input voltage                                      | 0.7*VDD |                      | VDD     | V       |                                                                                                                                                                     |
| Logic "0" output voltage                                     | 0       |                      | 0.4     | V       | Output current -2.5 mA, 3.0 V supply voltage                                                                                                                        |
| Logic "1" output voltage                                     | 2.5     |                      | VDD     | V       | Output current 2.5 mA, 3.0 V supply voltage                                                                                                                         |
| Logic "0" input current                                      | NA      |                      | -1      | $\mu$ A | Input signal equals GND                                                                                                                                             |
| Logic "1" input current                                      | NA      |                      | 1       | $\mu$ A | Input signal equals VDD                                                                                                                                             |
| DIO setup time                                               | 20      |                      |         | ns      | TX mode, minimum time DIO must be ready before the positive edge of DCLK                                                                                            |
| DIO hold time                                                | 10      |                      |         | ns      | TX mode, minimum time DIO must be held after the positive edge of DCLK                                                                                              |
| Serial interface (PCLK, PDATA and PALE) timing specification |         |                      |         |         | See Table 2 page 14                                                                                                                                                 |
| <b>Current Consumption</b>                                   |         |                      |         |         |                                                                                                                                                                     |
| Power Down mode                                              |         | 0.2                  | 1       | $\mu$ A | Oscillator core off                                                                                                                                                 |

| Parameter                                                              | Min. | Typ.            | Max. | Unit           | Condition / Note                                                                                                                                        |
|------------------------------------------------------------------------|------|-----------------|------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Current Consumption, receive mode 433/868 MHz                          |      | 7.4/9.6         |      | mA             | Current is programmable and can be increased for improved sensitivity<br>Polling controlled by micro-controller using 1:100 receive to power down ratio |
| Current Consumption, average in receive mode using polling 433/868 MHz |      | 74/96           |      | μA             |                                                                                                                                                         |
| Current Consumption, transmit mode 433/868 MHz:                        |      |                 |      |                |                                                                                                                                                         |
| P=0.01mW (-20 dBm)                                                     |      | 5.3/8.6         |      | mA             | The output power is delivered to a 50Ω load, see also p. 32                                                                                             |
| P=0.3 mW (-5 dBm)                                                      |      | 8.9/13.8        |      | mA             |                                                                                                                                                         |
| P=1 mW (0 dBm)                                                         |      | 10.4/16.5       |      | mA             |                                                                                                                                                         |
| P=3 mW (5 dBm)                                                         |      | 14.8/25.4       |      | mA             |                                                                                                                                                         |
| P=10 mW (10 dBm)                                                       |      | 26.7/NA         |      | mA             |                                                                                                                                                         |
| Current Consumption, crystal osc.                                      |      | 30<br>80<br>105 |      | μA<br>μA<br>μA | 3-8 MHz, 16 pF load<br>9-14 MHz, 12 pF load<br>14-16 MHz, 16 pF load                                                                                    |
| Current Consumption, crystal osc. And bias                             |      | 860             |      | μA             |                                                                                                                                                         |
| Current Consumption, crystal osc., bias and synthesiser, RX/TX         |      | 4/5<br>5/6      |      | mA<br>mA       | < 500 MHz<br>> 500 MHz                                                                                                                                  |

## 4. Pin Assignment

| Pin no. | UltraCSP pin no. | Pin name       | Pin type             | Description                                                                                                                                          |
|---------|------------------|----------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | G3               | AVDD           | Power (A)            | Power supply (3 V) for analog modules (mixer and IF)                                                                                                 |
| 2       | F2               | AGND           | Ground (A)           | Ground connection (0 V) for analog modules (mixer and IF)                                                                                            |
| 3       | G2               | RF_IN          | RF Input             | RF signal input from antenna                                                                                                                         |
| 4       | G1               | RF_OUT         | RF output            | RF signal output to antenna                                                                                                                          |
| 5       | F1               | AVDD           | Power (A)            | Power supply (3 V) for analog modules (LNA and PA)                                                                                                   |
| 6       | E2               | AGND           | Ground (A)           | Ground connection (0 V) for analog modules (LNA and PA)                                                                                              |
| 7       | E1               | AGND           | Ground (A)           | Ground connection (0 V) for analog modules (PA)                                                                                                      |
| 8       | D1               | AGND           | Ground (A)           | Ground connection (0 V) for analog modules (VCO and prescaler)                                                                                       |
| 9       | C1               | AVDD           | Power (A)            | Power supply (3 V) for analog modules (VCO and prescaler)                                                                                            |
| 10      | B1               | L1             | Analog input         | Connection no 1 for external VCO tank inductor                                                                                                       |
| 11      | A1               | L2             | Analog input         | Connection no 2 for external VCO tank inductor                                                                                                       |
| 12      | B2               | CHP_OUT (LOCK) | Analog output        | Charge pump current output<br>The pin can also be used as PLL Lock indicator. Output is high when PLL is in lock.                                    |
| 13      | C2               | R_BIAS         | Analog output        | Connection for external precision bias resistor (82 k $\Omega$ , $\pm$ 1%)                                                                           |
| 14      | F3               | AGND           | Ground (A)           | Ground connection (0 V) for analog modules (backplane)                                                                                               |
| 15      | A2               | AVDD           | Power (A)            | Power supply (3 V) for analog modules (general)                                                                                                      |
| 16      | B3               | AGND           | Ground (A)           | Ground connection (0 V) for analog modules (general)                                                                                                 |
| 17      | A3               | XOSC_Q2        | Analog output        | Crystal, pin 2                                                                                                                                       |
| 18      | A4               | XOSC_Q1        | Analog input         | Crystal, pin 1, or external clock input                                                                                                              |
| 19      | B4               | AGND           | Ground (A)           | Ground connection (0 V) for analog modules (guard)                                                                                                   |
| 20      | C3               | DGND           | Ground (D)           | Ground connection (0 V) for digital modules (substrate)                                                                                              |
| 21      | C4               | DVDD           | Power (D)            | Power supply (3 V) for digital modules                                                                                                               |
| 22      | D4               | DGND           | Ground (D)           | Ground connection (0 V) for digital modules                                                                                                          |
| 23      | E4               | DIO            | Digital input/output | Data input/output. Data input in transmit mode. Data output in receive mode                                                                          |
| 24      | F4               | DCLK           | Digital output       | Data clock for data in both receive and transmit mode                                                                                                |
| 25      | G4               | PCLK           | Digital input        | Programming clock for 3-wire bus                                                                                                                     |
| 26      | D3               | PDATA          | Digital input/output | Programming data for 3-wire bus. Programming data input for write operation, programming data output for read operation                              |
| 27      | D2               | PALE           | Digital input        | Programming address latch enable for 3-wire bus. Internal pull-up.                                                                                   |
| 28      | E3               | RSSI/IF        | Analog output        | The pin can be used as RSSI or 10.7 MHz IF output to optional external IF and demodulator. If not used, the pin should be left open (not connected). |

A=Analog, D=Digital

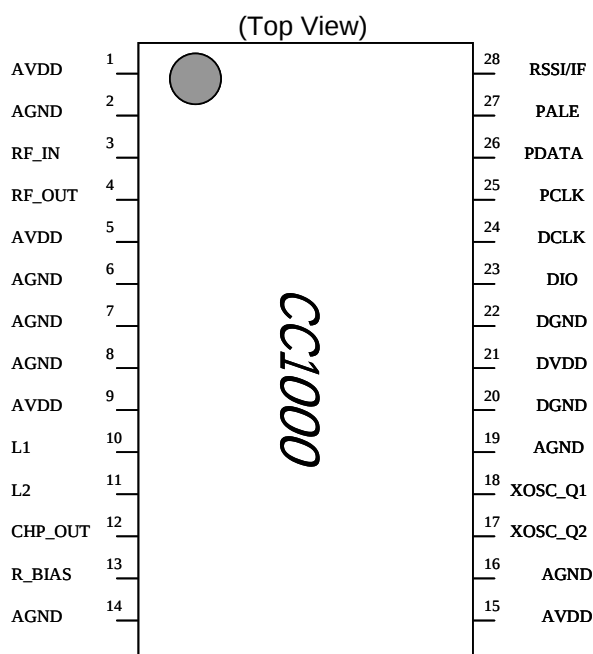

## 5. Circuit Description

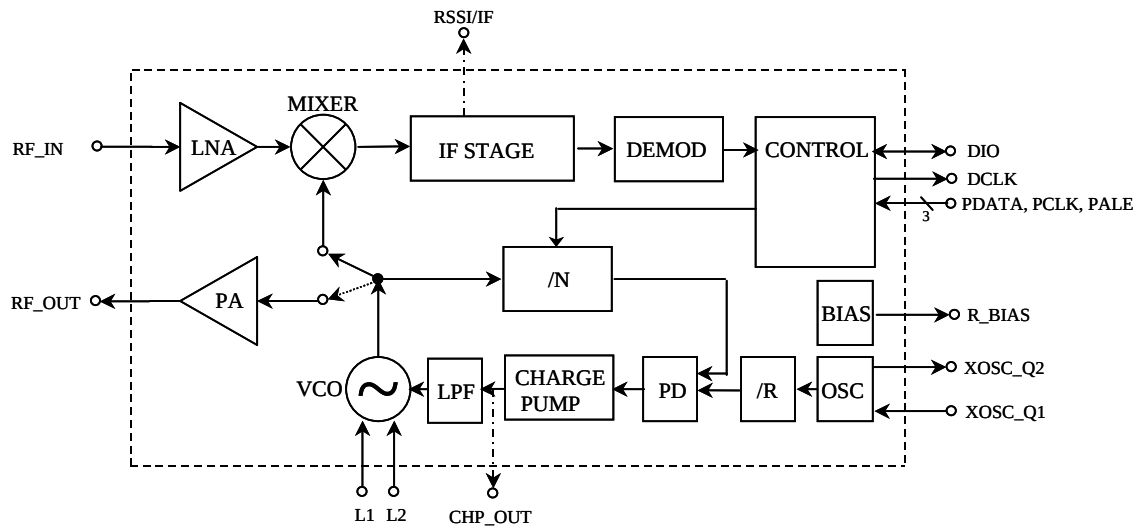


Figure 1. Simplified block diagram of the CC1000

A simplified block diagram of CC1000 is shown in Figure 1. Only signal pins are shown.

In receive mode CC1000 is configured as a traditional superheterodyne receiver. The RF input signal is amplified by the low-noise amplifier (LNA) and converted down to the intermediate frequency (IF) by the mixer (MIXER). In the intermediate frequency stage (IF STAGE) this downconverted signal is amplified and filtered before being fed to the demodulator (DEMOM). As an option a RSSI signal, or the IF signal after the mixer is available at the RSSI/IF pin. After demodulation CC1000 outputs the digital demodulated data on the pin DIO. Synchronisation is done on-chip providing data clock at DCLK.

In transmit mode the voltage controlled oscillator (VCO) output signal is fed directly to the power amplifier (PA). The RF output is frequency shift keyed (FSK) by the digital bit stream fed to the pin DIO. The internal T/R switch circuitry makes the antenna interface and matching very easy.

The frequency synthesiser generates the local oscillator signal which is fed to the MIXER in receive mode and to the PA in transmit mode. The frequency synthesiser consists of a crystal oscillator (XOSC), phase detector (PD), charge pump (CHARGE PUMP), VCO, and frequency dividers (/R and /N). An external crystal must be connected to XOSC, and only an external inductor is required for the VCO.

The 3-wire digital serial interface (CONTROL) is used for configuration.

## 6. Application Circuit

Very few external components are required for the operation of *CC1000*. A typical application circuit is shown in Figure 2. Component values are shown in Table 1.

### 6.1 Input / output matching

C31/L32 is the input match for the receiver. L32 is also a DC choke for biasing. C41, L41 and C42 are used to match the transmitter to 50  $\Omega$ . An internal T/R switch circuit makes it possible to connect the input and output together and match the *CC1000* to 50  $\Omega$  in both RX and TX mode. See "Input/output matching" p.31 for details.

### 6.2 VCO inductor

The VCO is completely integrated except for the inductor L101.

Component values for the matching network and VCO inductor are easily calculated using the SmartRF® Studio software.

### 6.3 Additional filtering

Additional external components (e.g. RF LC or SAW-filter) may be used in order to improve the performance in specific applications. See also "Optional LC filter" p.36 for further information.

### 6.4 Power supply decoupling

Power supply decoupling and filtering must be used (not shown in the application circuit). The placement and size of the decoupling capacitors and the power supply filtering are very important to achieve the optimum performance. Chipcon provides reference designs (CC1000PP and CC1000uCSP\_EM) that should be followed very closely.

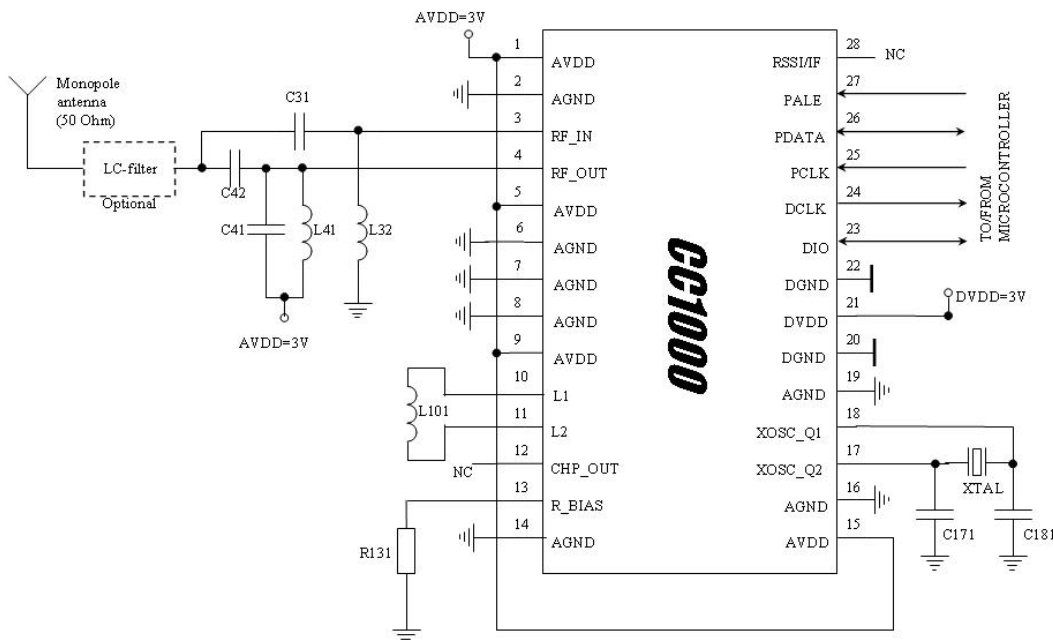


Figure 2. Typical *CC1000* application circuit (power supply decoupling not shown)

| CC1000 TSSOP package |                                                |                                                 |                                                 |                                                 |
|----------------------|------------------------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| Item                 | 315 MHz                                        | 433 MHz                                         | 868 MHz                                         | 915 MHz                                         |
| C31                  | 8.2 pF, 5%, C0G, 0603                          | 15 pF, 5%, C0G, 0603                            | 10 pF, 5%, C0G, 0603                            | 10 pF, 5%, C0G, 0603                            |
| C41                  | 2.2 pF, 5%, C0G, 0603                          | 8.2 pF, 5%, C0G, 0603                           | Not used                                        | Not used                                        |
| C42                  | 5.6 pF, 5%, C0G, 0603                          | 5.6 pF, 5%, C0G, 0603                           | 4.7 pF, 5%, C0G, 0603                           | 4.7 pF, 5%, C0G, 0603                           |
| C171                 | 18 pF, 5%, C0G, 0603                           | 18 pF, 5%, C0G, 0603                            | 18 pF, 5%, C0G, 0603                            | 18 pF, 5%, C0G, 0603                            |
| C181                 | 18 pF, 5%, C0G, 0603                           | 18 pF, 5%, C0G, 0603                            | 18 pF, 5%, C0G, 0603                            | 18 pF, 5%, C0G, 0603                            |
| L32                  | 39 nH, 10%, 0805<br>(Coilcraft 0805CS-390XKBC) | 68 nH, 10%, 0805<br>(Coilcraft 0805CS-680XKBC)  | 120 nH, 10%, 0805<br>(Coilcraft 0805CS-121XKBC) | 120 nH, 10%, 0805<br>(Coilcraft 0805CS-121XKBC) |
| L41                  | 20 nH, 10%, 0805<br>(Coilcraft 0805HQ-20NXKBC) | 6.2 nH, 10%, 0805<br>(Coilcraft 0805HQ-6N2XKBC) | 2.5 nH, 10%, 0805<br>(Coilcraft 0805HQ-2N5XKBC) | 2.5 nH, 10%, 0805<br>(Coilcraft 0805HQ-2N5XKBC) |
| L101                 | 56 nH, 5%, 0805<br>(Koa KL732ATE56NJ)          | 33 nH, 5%, 0805<br>(Koa KL732ATE33NJ)           | 4.7 nH, 5%, 0805<br>(Koa KL732ATE4N7C)          | 4.7 nH, 5%, 0805<br>(Koa KL732ATE4N7C)          |
| R131                 | 82 k $\Omega$ , 1%, 0603                       | 82 k $\Omega$ , 1%, 0603                        | 82 k $\Omega$ , 1%, 0603                        | 82 k $\Omega$ , 1%, 0603                        |
| XTAL                 | 14.7456 MHz crystal,<br>16 pF load             | 14.7456 MHz crystal,<br>16 pF load              | 14.7456 MHz crystal,<br>16 pF load              | 14.7456 MHz crystal,<br>16 pF load              |

| CC1000 UltraCSP™ package |                                         |                                         |                                          |                                          |
|--------------------------|-----------------------------------------|-----------------------------------------|------------------------------------------|------------------------------------------|
| Item                     | 315 MHz                                 | 433 MHz                                 | 868 MHz                                  | 915 MHz                                  |
| C31                      | 8.2 pF, 5%, C0G, 0402                   | 15 pF, 5%, C0G, 0402                    | 10 pF, 5%, C0G, 0402                     | 10 pF, 5%, C0G, 0402                     |
| C41                      | Not used                                | Not used                                | Not used                                 | Not used                                 |
| C42                      | 4.7 pF, 5%, C0G, 0402                   | 4.7 pF, 5%, C0G, 0402                   | 6.8 pF, 5%, C0G, 0402                    | 6.8 pF, 5%, C0G, 0402                    |
| C171                     | 18 pF, 5%, C0G, 0402                    | 18 pF, 5%, C0G, 0402                    | 18 pF, 5%, C0G, 0402                     | 18 pF, 5%, C0G, 0402                     |
| C181                     | 18 pF, 5%, C0G, 0402                    | 18 pF, 5%, C0G, 0402                    | 18 pF, 5%, C0G, 0402                     | 18 pF, 5%, C0G, 0402                     |
| L32                      | 39 nH, 5%, 0402<br>(Ceramic multilayer) | 68 nH, 5%, 0402<br>(Ceramic multilayer) | 120 nH, 5%, 0402<br>(Ceramic multilayer) | 120 nH, 5%, 0402<br>(Ceramic multilayer) |
| L41                      | 22 nH, 5%, 0402<br>(Ceramic multilayer) | 15 nH, 5%, 0402<br>(Ceramic multilayer) | 2.7 nH, 5%, 0402<br>(Ceramic multilayer) | 2.7 nH, 5%, 0402<br>(Ceramic multilayer) |
| L101                     | 56 nH, 5%, 0402<br>(Thin film inductor) | 33 nH, 5%, 0402<br>(Thin film inductor) | 7.5 nH, 5%, 0402<br>(Thin film inductor) | 7.5 nH, 5%, 0402<br>(Thin film inductor) |
| R131                     | 82 k $\Omega$ , 1%, 0402                | 82 k $\Omega$ , 1%, 0402                | 82 k $\Omega$ , 1%, 0402                 | 82 k $\Omega$ , 1%, 0402                 |
| XTAL                     | 14.7456 MHz crystal,<br>16 pF load      | 14.7456 MHz crystal,<br>16 pF load      | 14.7456 MHz crystal,<br>16 pF load       | 14.7456 MHz crystal,<br>16 pF load       |

Note: Items shaded are different for different frequencies

**Table 1. Bill of materials for the application circuit**

Note that the component values for 868/915 MHz can be the same. However, it is important the layout is optimised for the selected VCO inductor in order to centre the tuning range around the operating frequency to account for inductor tolerance. The VCO inductor must be placed very close and symmetrical with respect to the pins (L1 and L2).

Chipcon provide reference layouts that should be followed very closely in order to achieve the best performance. The reference design can be downloaded from the [Chipcon website](#).

## 7. Configuration Overview

*CC1000* can be configured to achieve the best performance for different applications. Through the programmable configuration registers the following key parameters can be programmed:

- Receive / transmit mode
- RF output power
- Frequency synthesiser key parameters: RF output frequency, FSK


- frequency separation (deviation), crystal oscillator reference frequency
- Power-down / power-up mode
- Crystal oscillator power-up / power down
- Data rate and data format (NRZ, Manchester coded or UART interface)
- Synthesiser lock indicator mode
- Optional RSSI or external IF

## 8. Configuration Software

Chipcon provides users of *CC1000* with a software program, SmartRF® Studio (Windows interface) that generates all necessary *CC1000* configuration data based on the user's selections of various parameters. These hexadecimal numbers will then be the necessary input to the microcontroller for the configuration of

*CC1000*. In addition the program will provide the user with the component values needed for the input/output matching circuit and the VCO inductor.

Figure 3 shows the user interface of the *CC1000* configuration software.

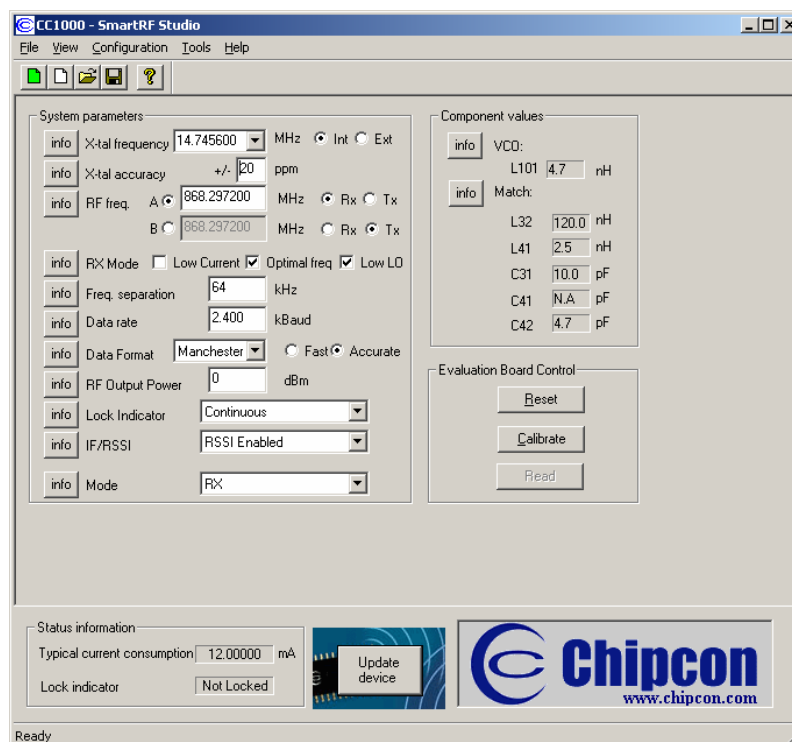

**Figure 3. SmartRF® Studio user interface**

## 9. 3-wire Serial Configuration Interface

CC1000 is configured via a simple 3-wire interface (PDATA, PCLK and PALE). There are 28 8-bit configuration registers, each addressed by a 7-bit address. A Read/Write bit initiates a read or write operation. A full configuration of CC1000 requires sending 22 data frames of 16 bits each (7 address bits, R/W bit and 8 data bits). The time needed for a full configuration depend on the PCLK frequency. With a PCLK frequency of 10 MHz the full configuration is done in less than 46  $\mu$ s. Setting the device in power down mode requires sending one frame only and will in this case take less than 2  $\mu$ s. All registers are also readable.

In each write-cycle 16 bits are sent on the PDATA-line. The seven most significant bits of each data frame (A6:0) are the address-bits. A6 is the MSB (Most Significant Bit) of the address and is sent as the first bit. The next bit is the R/W bit (high for write, low for read). During address and R/W bit transfer the PALE (Program Address Latch Enable) must be kept low. The 8 data-bits are then transferred (D7:0). See Figure 4.

The timing for the programming is also shown in Figure 4 with reference to Table 2. The clocking of the data on PDATA is done on the negative edge of PCLK. When the last bit, D0, of the 8 data-bits has been loaded, the data word is loaded in the internal configuration register.

The configuration data is stored in internal RAM. The data is retained during power-down mode, but not when the power-supply is turned off. The registers can be programmed in any order.

The configuration registers can also be read by the microcontroller via the same configuration interface. The seven address bits are sent first, then the R/W bit set low to initiate the data read-back. CC1000 then returns the data from the addressed register. PDATA is in this case used as an output and must be tri-stated (or set high in the case of an open collector pin) by the microcontroller during the data read-back (D7:0). The read operation is illustrated in Figure 5.

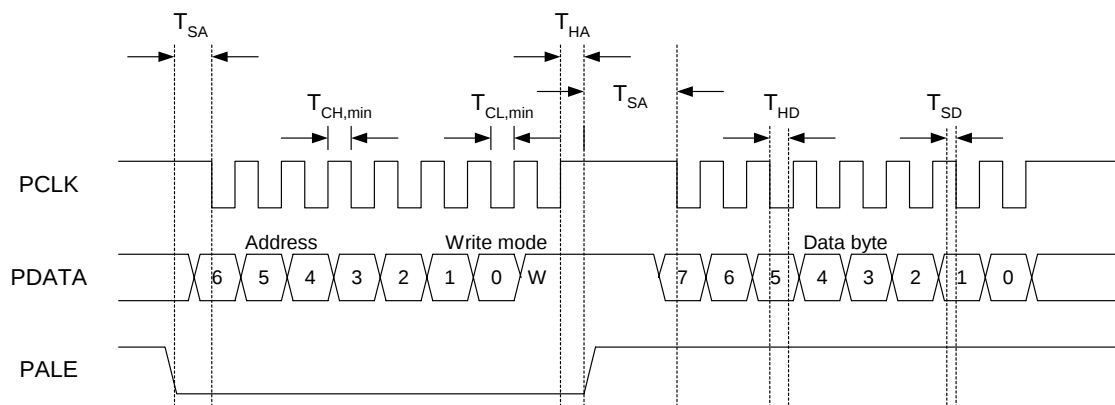


Figure 4. Configuration registers write operation

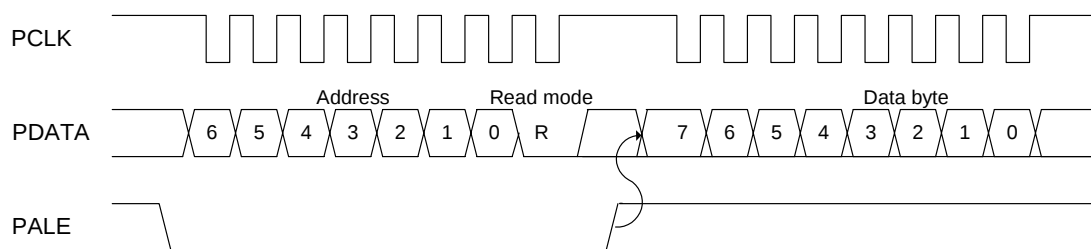


Figure 5. Configuration registers read operation

| Parameter                | Symbol              | Min | Max | Units | Conditions                                                                     |
|--------------------------|---------------------|-----|-----|-------|--------------------------------------------------------------------------------|
| PCLK, clock frequency    | $F_{\text{CLOCK}}$  | -   | 10  | MHz   |                                                                                |
| PCLK low pulse duration  | $T_{\text{CL,min}}$ | 50  |     | ns    | The minimum time PCLK must be low.                                             |
| PCLK high pulse duration | $T_{\text{CH,min}}$ | 50  |     | ns    | The minimum time PCLK must be high.                                            |
| PALE setup time          | $T_{\text{SA}}$     | 10  | -   | ns    | The minimum time PALE must be low before negative edge of PCLK.                |
| PALE hold time           | $T_{\text{HA}}$     | 10  | -   | ns    | The minimum time PALE must be held low after the <i>positive</i> edge of PCLK. |
| PDATA setup time         | $T_{\text{SD}}$     | 10  | -   | ns    | The minimum time data on PDATA must be ready before the negative edge of PCLK. |
| PDATA hold time          | $T_{\text{HD}}$     | 10  | -   | ns    | The minimum time data must be held at PDATA, after the negative edge of PCLK.  |
| Rise time                | $T_{\text{rise}}$   |     | 100 | ns    | The maximum rise time for PCLK and PALE                                        |
| Fall time                | $T_{\text{fall}}$   |     | 100 | ns    | The maximum fall time for PCLK and PALE                                        |

Note: The set-up- and hold-times refer to 50% of VDD.

Table 2. Serial interface, timing specification

## 10. Microcontroller Interface

Used in a typical system, CC1000 will interface to a microcontroller. This microcontroller must be able to:

- Program CC1000 into different modes via the 3-wire serial configuration interface (PDATA, PCLK and PALE).
- Interface to the bi-directional synchronous data signal interface (DIO and DCLK).

- Optionally the microcontroller can do data encoding / decoding.
- Optionally the microcontroller can monitor the frequency lock status from pin CHP\_OUT (LOCK).
- Optionally the microcontroller can monitor the RSSI output for signal strength acquisition.

### 10.1 Connecting the microcontroller

The microcontroller uses 3 output pins for the configuration interface (PDATA, PCLK and PALE). PDATA should be a bi-directional pin for data read-back. A bi-directional pin is used for data (DIO) to be transmitted and data received. DCLK providing the data timing should be connected to a microcontroller input. Optionally another pin can be used to monitor the LOCK signal (available at the CHP\_OUT pin). This signal is logic level high when the PLL is in lock. See **Figure 6**.

The microcontroller pins connected to PDATA and PCLK can be used for other purposes when the configuration interface is not used. PDATA and PCLK are high impedance inputs as long as PALE is high.

PALE has an internal pull-up resistor and should be left open (tri-stated by the microcontroller) or set to a high level during power down mode in order to prevent a trickle current flowing in the pull-up. The pin state in power down mode is summarized in Table 3.

Also the RSSI signal can be connected to the microcontroller if it has an analogue ADC input.

| Pin   | Pin state                            | Note                                                                  |
|-------|--------------------------------------|-----------------------------------------------------------------------|
| PDATA | Input                                | Should be driven high or low                                          |
| PCLK  | Input                                | Should be driven high or low                                          |
| PALE  | Input with internal pull-up resistor | Should be driven high or high-impedance to minimize power consumption |
| DIO   | Input                                | Should be driven high or low                                          |
| DCLK  | High-impedance output                |                                                                       |

Table 3. CC1000 pins in power-down mode

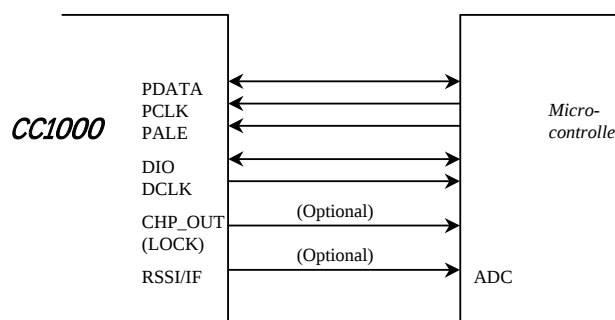


Figure 6. Microcontroller interface

## 11. Signal interface

The signal interface consists of DIO and DCLK and is used for the data to be transmitted and data received. DIO is the bi-directional data line and DCLK provides a synchronous clock both during data transmission and data reception.

The CC1000 can be used with NRZ (Non-Return-to-Zero) data or Manchester (also known as bi-phase-level) encoded data. CC1000 can also synchronise the data from the demodulator and provide the data clock at DCLK.

CC1000 can be configured for three different data formats:

**Synchronous NRZ mode.** In transmit mode CC1000 provides the data clock at DCLK, and DIO is used as data input. Data is clocked into CC1000 at the rising edge of DCLK. The data is modulated at RF without encoding. CC1000 can be configured for the data rates 0.6, 1.2, 2.4, 4.8, 9.6, 19.2, 38.4 or 76.8 kbit/s. For 38.4 and 76.8 kbit/s a crystal frequency of 14.7456 MHz must be used. In receive mode CC1000 does the synchronisation and provides received data clock at DCLK and data at DIO. The data should be clocked into the interfacing circuit at the rising edge of DCLK. See Figure 7.

**Synchronous Manchester encoded mode.** In transmit mode CC1000 provides the data clock at DCLK, and DIO is used as data input. Data is clocked into CC1000 at the rising edge of DCLK and should be in NRZ format. The data is modulated at RF with Manchester code. The encoding is done by CC1000. In this mode CC1000 can be configured for the data rates 0.3, 0.6, 1.2, 2.4, 4.8, 9.6, 19.2 or 38.4 kbit/s. The 38.4 kbit/s rate corresponds to the maximum 76.8 kBaud due to the Manchester encoding. For 38.4 and 76.8 kBaud a crystal frequency of 14.7456 MHz must be used. In receive mode CC1000 does the synchronisation and provides received data clock at DCLK and data at DIO. CC1000 does the decoding and NRZ data

is presented at DIO. The data should be clocked into the interfacing circuit at the rising edge of DCLK. See Figure 8.

**Transparent Asynchronous UART mode.** In transmit mode DIO is used as data input. The data is modulated at RF without synchronisation or encoding. In receive mode the raw data signal from the demodulator is sent to the output. No synchronisation or decoding of the signal is done in CC1000 and should be done by the interfacing circuit. The DCLK pin is used as data output in this mode. Data rates in the range from 0.6 to 76.8 kBaud can be used. For 38.4 and 76.8 kBaud a crystal frequency of 14.7456 MHz must be used. See Figure 9.


### 11.1 Manchester encoding and decoding

In the *Synchronous Manchester encoded mode* CC1000 uses Manchester coding when modulating the data. The CC1000 also performs the data decoding and synchronisation. The Manchester code is based on transitions; a "0" is encoded as a low-to-high transition, a "1" is encoded as a high-to-low transition. See Figure 10.


The CC1000 can detect a Manchester decoding violation and will set a Manchester Violation Flag when such a violation is detected in the incoming signal. The threshold limit for the Manchester Violation can be set in the MODEM1 register. The Manchester Violation Flag can be monitored at the CHP\_OUT (LOCK) pin, configured in the LOCK register.

The Manchester code ensures that the signal has a constant DC component, which is necessary in some FSK demodulators. Using this mode also ensures compatibility with CC400/CC900 designs.

**Transmitter side:**

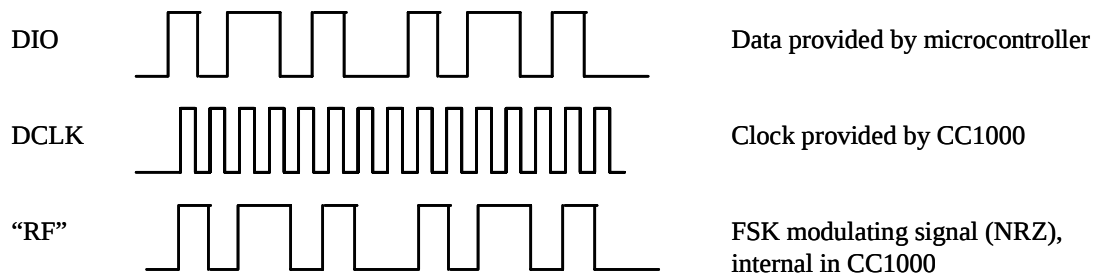


**Receiver side:**

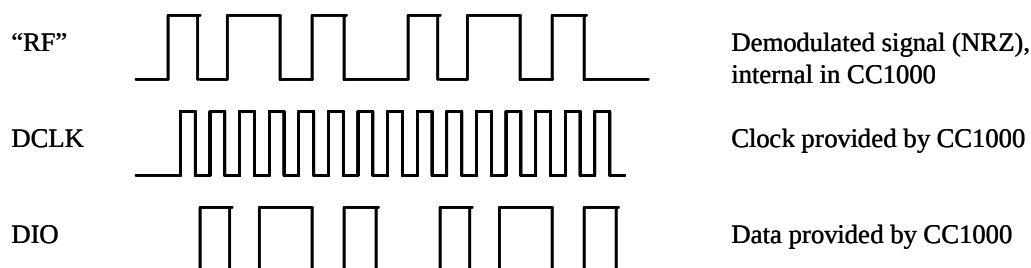


**Figure 7. Synchronous NRZ mode**

**Transmitter side:**

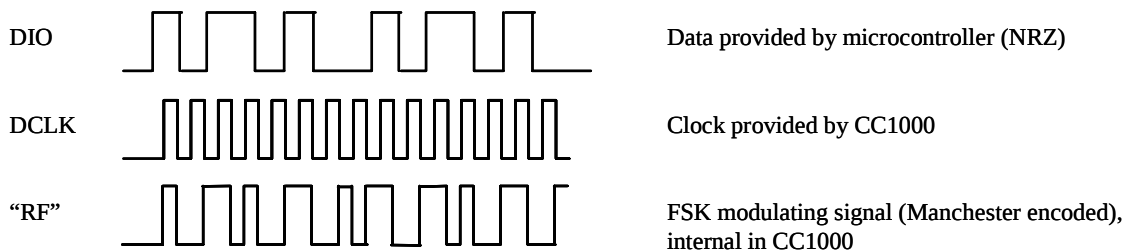


**Receiver side:**

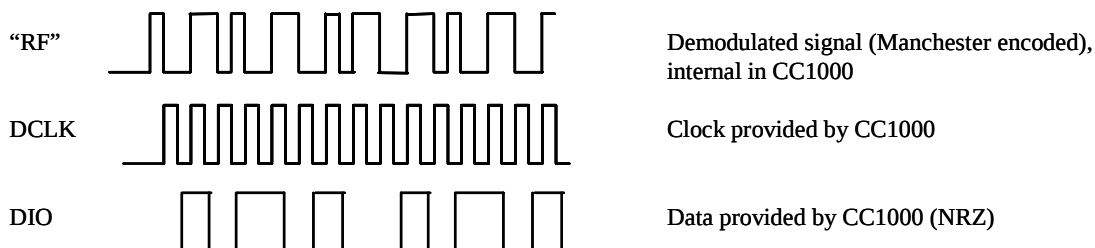


**Figure 8. Synchronous Manchester encoded mode**


**Transmitter side:**

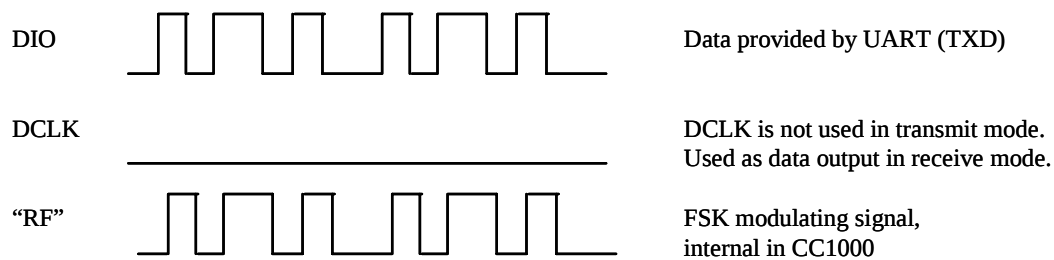

**Receiver side:**

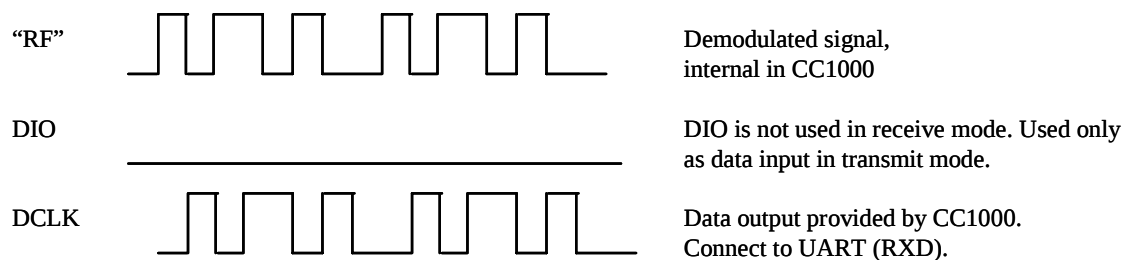

**Figure 9. Transparent Asynchronous UART mode**

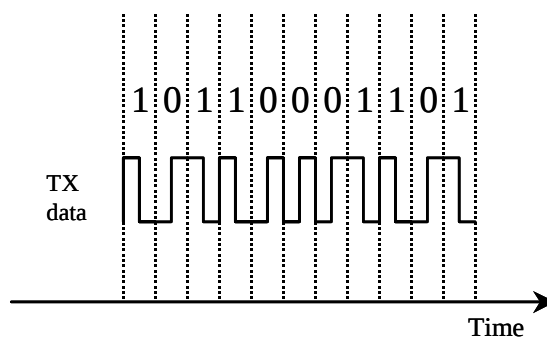

**Figure 10. Manchester encoding**

## 12. Bit synchroniser and data decision

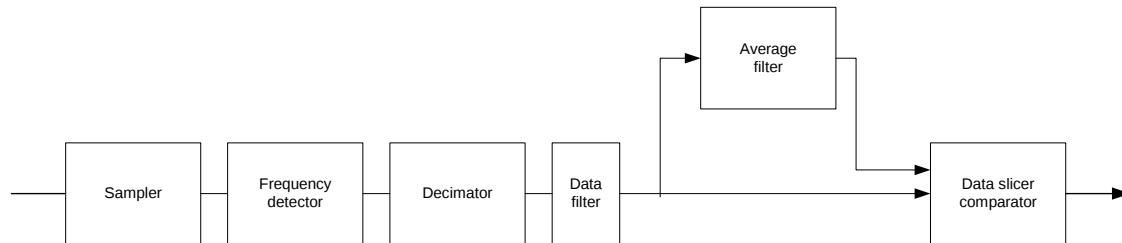


Figure 11. Demodulator block diagram

A block diagram of the digital demodulator is shown in Figure 11. The IF signal is sampled and its instantaneous frequency is detected. The result is decimated and filtered. In the data slicer the data filter output is compared to the average filter output to generate the data output.

The averaging filter is used to find the average value of the incoming data. While the averaging filter is running and acquiring samples, it is important that the number of high and low bits received is equal (e.g. Manchester code or a balanced preamble).

Therefore all modes, also synchronous NRZ mode, need a DC balanced preamble for the internal data slicer to acquire correct comparison level from the averaging filter. The suggested preamble is a '010101...' bit pattern. The same bit pattern should also be used in Manchester mode, giving a '011001100110...chip pattern. This is necessary for the bit synchronizer to synchronize correctly.

The averaging filter must be locked before any NRZ data can be received. If the averaging filter is locked (MODEM1.LOCK\_AVG\_MODE='1'), the

acquired value will be kept also after Power Down or Transmit mode. After a modem reset (MODEM1.MODEM\_RESET\_N), or a main reset (using any of the standard reset sources), the averaging filter is reset.

In a polled receiver system the automatic locking can be used. This is illustrated in Figure 12. If the receiver is operated continuously and searching for a preamble, the averaging filter should be locked manually as soon as the preamble is detected. This is shown in Figure 13. If the data is Manchester coded there is no need to lock the averaging filter (MODEM1.LOCK\_AVG\_IN='0'), as shown in Figure 14.

The minimum length of the preamble depends on the acquisition mode selected and the settling time. Table 4 gives the minimum recommended number of chips for the preamble in NRZ and UART modes. In this context 'chips' refer to the data coding. Using Manchester coding every bit consists of two 'chips'. For Manchester mode the minimum recommended number of chips is shown in Table 5.

| Settling                               | Manual Lock                                                                                             |                                                                                                         | Automatic Lock                                                               |                                                                              |
|----------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                                        | NRZ mode                                                                                                | UART mode                                                                                               | NRZ mode                                                                     | UART mode                                                                    |
| <b>MODEM1 .<br/>SETTLING<br/>(1:0)</b> | <b>MODEM1 . LOCK_<br/>AVG_MODE='1'<br/>MODEM1 . LOCK_<br/>AVG_IN='0'=<math>\rightarrow</math>'1'</b> ** | <b>MODEM1 . LOCK_<br/>AVG_MODE='1'<br/>MODEM1 . LOCK_<br/>AVG_IN='0'=<math>\rightarrow</math>'1'</b> ** | <b>MODEM1 . LOCK_<br/>AVG_MODE='0'<br/>MODEM1 . LOCK_<br/>AVG_IN='X'</b> *** | <b>MODEM1 . LOCK_<br/>AVG_MODE='0'<br/>MODEM1 . LOCK_<br/>AVG_IN='X'</b> *** |
| 00                                     | 14                                                                                                      | 11                                                                                                      | 16                                                                           | 16                                                                           |
| 01                                     | 25                                                                                                      | 22                                                                                                      | 32                                                                           | 32                                                                           |
| 10                                     | 46                                                                                                      | 43                                                                                                      | 64                                                                           | 64                                                                           |
| 11                                     | 89                                                                                                      | 86                                                                                                      | 128                                                                          | 128                                                                          |

Notes:

\*\* The averaging filter is locked when **MODEM1 . LOCK\_AVG\_IN** is set to 1

\*\*\* X = Do not care. The timer for the automatic lock is started when RX mode is set in the **RFMAIN** register

Also please note that in addition to the number of bits required to lock the filter, you need to add the number of bits needed for the preamble detector. See the next section for more information.

**Table 4. Minimum preamble bits for locking the averaging filter, NRZ and UART mode**

| Settling                               | Free-running Manchester mode                                             |
|----------------------------------------|--------------------------------------------------------------------------|
| <b>MODEM1 .<br/>SETTLING<br/>(1:0)</b> | <b>MODEM1 . LOCK_<br/>AVG_MODE='1'<br/>MODEM1 . LOCK_<br/>AVG_IN='0'</b> |
| 00                                     | 23                                                                       |
| 01                                     | 34                                                                       |
| 10                                     | 55                                                                       |
| 11                                     | 98                                                                       |

**Table 5. Minimum number preamble chips for averaging filter, Manchester mode**

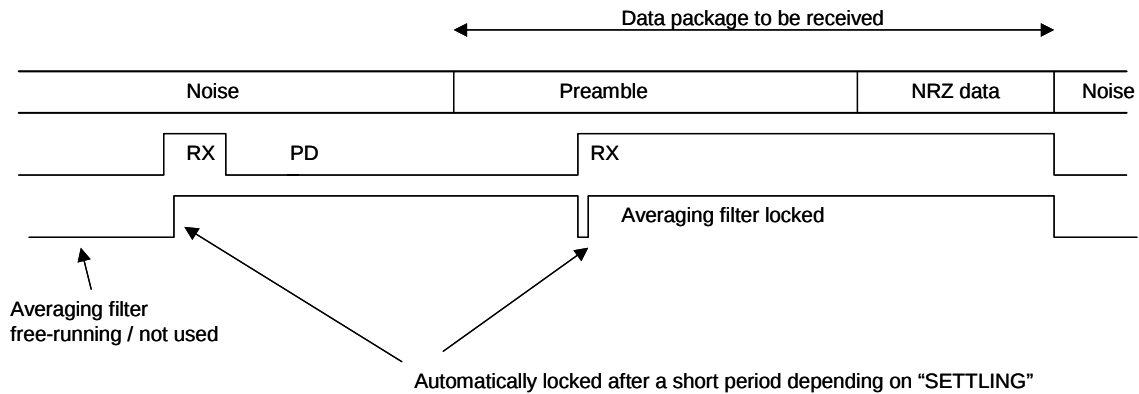


Figure 12. Automatic locking of the averaging filter

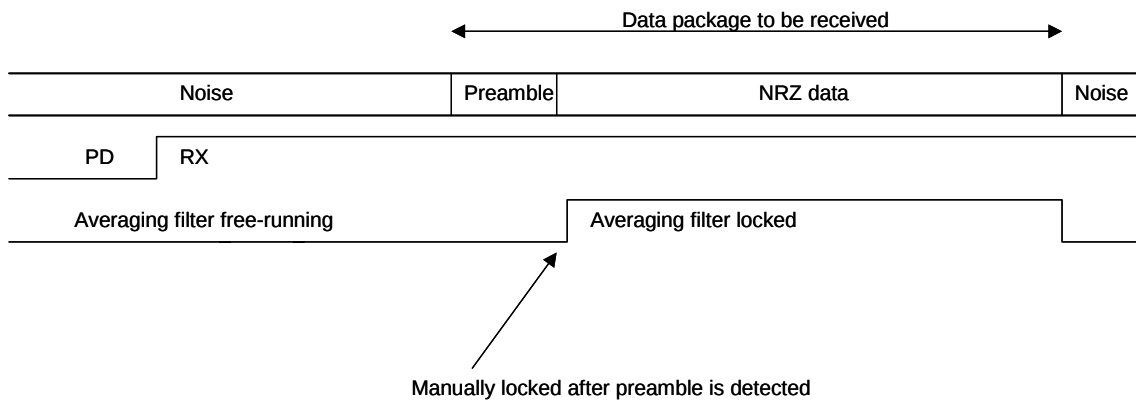


Figure 13. Manual locking of the averaging filter

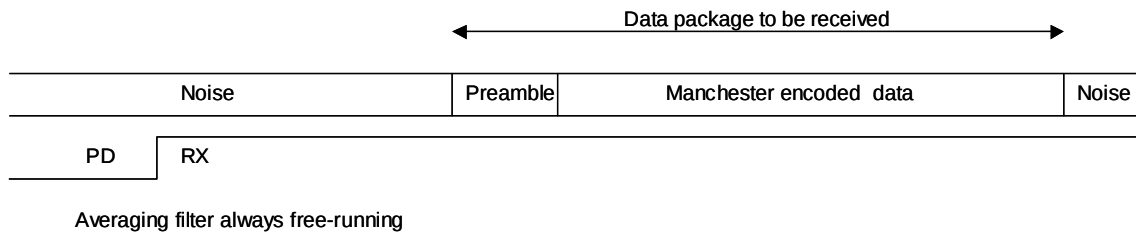


Figure 14. Free-running averaging filter

### 13. Receiver sensitivity versus data rate and frequency separation

The receiver sensitivity depends on the data rate, the data format, FSK frequency separation and the RF frequency. Typical figures for the receiver sensitivity (BER =  $10^{-3}$ ) are shown in Table 6 for 64 kHz frequency separations and Table 7 for 20 kHz separations. Optimised sensitivity

configurations are used. For best performance the frequency separation should be as high as possible especially at high data rates. Table 8 shows the sensitivity for low current settings. See page 28 for how to program different current consumption.

| Data rate [kBaud]           | Separation [kHz] | 433 MHz  |                 |           | 868 MHz  |                 |           |
|-----------------------------|------------------|----------|-----------------|-----------|----------|-----------------|-----------|
|                             |                  | NRZ mode | Manchester mode | UART mode | NRZ mode | Manchester mode | UART mode |
| 0.6                         | 64               | -113     | -114            | -113      | -110     | -111            | -110      |
| 1.2                         | 64               | -111     | -112            | -111      | -108     | -109            | -108      |
| 2.4                         | 64               | -109     | -110            | -109      | -106     | -107            | -106      |
| 4.8                         | 64               | -107     | -108            | -107      | -104     | -105            | -104      |
| 9.6                         | 64               | -105     | -106            | -105      | -102     | -103            | -102      |
| 19.2                        | 64               | -103     | -104            | -103      | -100     | -101            | -100      |
| 38.4                        | 64               | -102     | -103            | -102      | -98      | -99             | -98       |
| 76.8                        | 64               | -100     | -101            | -100      | -97      | -98             | -97       |
| Average current consumption |                  | 9.3 mA   |                 |           | 11.8 mA  |                 |           |

**Table 6. Receiver sensitivity as a function of data rate at 433 and 868 MHz, BER =  $10^{-3}$ , frequency separation 64 kHz, normal current settings**

| Data rate [kBaud]           | Separation [kHz] | 433 MHz  |                 |           | 868 MHz  |                 |           |
|-----------------------------|------------------|----------|-----------------|-----------|----------|-----------------|-----------|
|                             |                  | NRZ mode | Manchester mode | UART mode | NRZ mode | Manchester mode | UART mode |
| 0.6                         | 20               | -109     | -111            | -109      | -106     | -108            | -106      |
| 1.2                         | 20               | -108     | -110            | -108      | -104     | -106            | -104      |
| 2.4                         | 20               | -106     | -108            | -106      | -103     | -105            | -103      |
| 4.8                         | 20               | -104     | -106            | -104      | -101     | -103            | -101      |
| 9.6                         | 20               | -103     | -104            | -103      | -100     | -101            | -100      |
| 19.2                        | 20               | -102     | -103            | -102      | -99      | -100            | -99       |
| 38.4                        | 20               | -98      | -100            | -98       | -98      | -99             | -98       |
| 76.8                        | 20               | -94      | -98             | -94       | -94      | -96             | -94       |
| Average current consumption |                  | 9.3 mA   |                 |           | 11.8 mA  |                 |           |

**Table 7. Receiver sensitivity as a function of data rate at 433 and 868 MHz, BER =  $10^{-3}$ , frequency separation 20 kHz, normal current settings**

| Data rate [kBaud]           | Separation [kHz] | 433 MHz  |                 |           | 868 MHz  |                 |           |
|-----------------------------|------------------|----------|-----------------|-----------|----------|-----------------|-----------|
|                             |                  | NRZ mode | Manchester mode | UART mode | NRZ mode | Manchester mode | UART mode |
| 0.6                         | 64               | -111     | -113            | -111      | -107     | -109            | -107      |
| 1.2                         | 64               | -110     | -111            | -110      | -106     | -107            | -106      |
| 2.4                         | 64               | -108     | -109            | -108      | -104     | -105            | -104      |
| 4.8                         | 64               | -106     | -107            | -106      | -102     | -103            | -102      |
| 9.6                         | 64               | -104     | -105            | -104      | -100     | -101            | -100      |
| 19.2                        | 64               | -102     | -103            | -102      | -98      | -99             | -98       |
| 38.4                        | 64               | -101     | -102            | -101      | -96      | -97             | -96       |
| 76.8                        | 64               | -99      | -100            | -99       | -95      | -96             | -95       |
| Average current consumption |                  | 7.4 mA   |                 |           | 9.6 mA   |                 |           |

**Table 8. Receiver sensitivity as a function of data rate at 433 and 868 MHz, BER =  $10^{-3}$ , frequency separation 64 kHz, low current settings**

## 14. Frequency programming

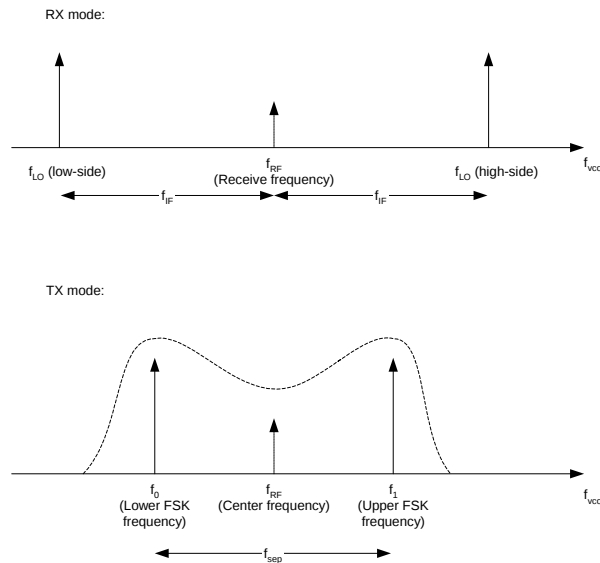


Figure 15. Relation between  $f_{vco}$ ,  $f_{if}$ , and LO frequency

The frequency synthesiser (PLL) is controlled by the frequency word in the configuration registers. There are two frequency words, *A* and *B*, which can be programmed to two different frequencies. One of the frequency words can be used for RX (local oscillator frequency) and the other for TX (transmitting frequency,  $f_0$ ). This makes it possible to switch very fast between RX mode and TX mode. They can also be used for RX (or TX) on two different channels. The MAIN.F\_REG control bit performs selection of frequency word A or B.

The frequency word, *FREQ*, is 24 bits (3 bytes) located in *FREQ\_2A:FREQ\_1A:FREQ\_0A* and *FREQ\_2B:FREQ\_1B:FREQ\_0B* for the *A* and *B* word, respectively.

The frequency word *FREQ* can be calculated from:

$$f_{vco} = f_{ref} \cdot \frac{FREQ + FSEP \cdot TXDATA + 8192}{16384},$$

where *TXDATA* is 0 or 1 in transmit mode depending on the data bit to be transmitted on DIO. In receive mode *TXDATA* is always 0.

The reference frequency  $f_{ref}$  is the crystal oscillator clock divided by *PLL.REFDIV*, a

number between 2 and 14 that should be chosen such that:

$$1.0 \text{ MHz} \leq f_{ref} \leq 2.46 \text{ MHz}$$

Thus, the reference frequency  $f_{ref}$  is:

$$f_{ref} = \frac{f_{xosc}}{REFDIV}$$

$f_{vco}$  is the Local Oscillator (LO) frequency in receive mode, and the  $f_0$  frequency in transmit mode (lower FSK frequency). The LO frequency must be  $f_{RF} - f_{IF}$  or  $f_{RF} + f_{IF}$  giving low-side or high side LO injection respectively. Note that the data on DIO will be inverted if high-side LO is used.

The upper FSK transmit frequency is given by:

$$f_1 = f_0 + f_{sep},$$

where the frequency separation  $f_{sep}$  is set by the 11 bit separation word (*FSEP1:FSEP0*):

$$f_{sep} = f_{ref} \cdot \frac{FSEP}{16384}$$

Clearing *PLL.ALARM\_DISABLE* will enable generation of the frequency alarm bits *PLL.ALARM\_H* and *PLL.ALARM\_L*. These bits indicate that the frequency

synthesis PLL is near the limit of generate the frequency requested, and the PLL should be recalibrated.

It is recommended that the `LOCK_CONTINUOUS` bit in the `LOCK`

register is checked when changing frequencies and when changing between RX and TX mode. If lock is not achieved, a calibration should be performed.

## 15. Recommended RX settings for ISM frequencies

Shown in Table 9 are the recommended RX frequency synthesiser settings for a few operating frequencies in the popular ISM bands. These settings ensure optimum configuration of the synthesiser in receive mode for best sensitivity. For some settings of the synthesiser (combinations of RF frequencies and reference frequency), the receiver sensitivity is degraded. The FSK frequency separation is set to 64 kHz. The SmartRF® Studio can be used to generate optimised configuration data as well. Also an application note (AN011) and a spreadsheet are available from Chipcon generating configuration data for any frequency giving optimum sensitivity.

| ISM Frequency [MHz] | Actual frequency [MHz] | Crystal frequency [MHz] | Low-side / high-side LO* | Reference divider REFDIV (decimal) | Frequency word RX mode FREQ (decimal) | Frequency word RX mode FREQ (hex) |
|---------------------|------------------------|-------------------------|--------------------------|------------------------------------|---------------------------------------|-----------------------------------|
| 315                 | 315.037200             | 3.6864                  | High-side                | 3                                  | 4194304                               | 400000                            |
|                     |                        | 7.3728                  |                          | 6                                  | 4194304                               | 400000                            |
|                     |                        | 11.0592                 |                          | 9                                  | 4194304                               | 400000                            |
|                     |                        | 14.7456                 |                          | 12                                 | 4194304                               | 400000                            |
| 433.3               | 433.302000             | 3.6864                  | Low-side                 | 3                                  | 5775168                               | 580000                            |
|                     |                        | 7.3728                  |                          | 6                                  | 5775168                               | 580000                            |
|                     |                        | 11.0592                 |                          | 9                                  | 5775168                               | 580000                            |
|                     |                        | 14.7456                 |                          | 12                                 | 5775168                               | 580000                            |
| 433.9               | 433.916400             | 3.6864                  | Low-side                 | 3                                  | 5775360                               | 582000                            |
|                     |                        | 7.3728                  |                          | 6                                  | 5775360                               | 582000                            |
|                     |                        | 11.0592                 |                          | 9                                  | 5775360                               | 582000                            |
|                     |                        | 14.7456                 |                          | 12                                 | 5775360                               | 582000                            |
| 434.5               | 434.530800             | 3.6864                  | Low-side                 | 3                                  | 5783552                               | 584000                            |
|                     |                        | 7.3728                  |                          | 6                                  | 5783552                               | 584000                            |
|                     |                        | 11.0592                 |                          | 9                                  | 5783552                               | 584000                            |
|                     |                        | 14.7456                 |                          | 12                                 | 5783552                               | 584000                            |
| 868.3               | 868.297200             | 3.6864                  | Low-side                 | 2                                  | 7708672                               | 75A000                            |
|                     |                        | 7.3728                  |                          | 4                                  | 7708672                               | 75A000                            |
|                     |                        | 11.0592                 |                          | 6                                  | 7708672                               | 75A000                            |
|                     |                        | 14.7456                 |                          | 8                                  | 7708672                               | 75A000                            |
| 868.95              | 868.918800             | 3.6864                  | High-side                | 2                                  | 7716864                               | 75C000                            |
|                     |                        | 7.3728                  |                          | 4                                  | 7716864                               | 75C000                            |
|                     |                        | 11.0592                 |                          | 6                                  | 7716864                               | 75C000                            |
|                     |                        | 14.7456                 |                          |                                    | 7716864                               | 75C000                            |
| 869.525             | 869.526000             | 3.6864                  | Low-side                 | 3                                  | 11583488                              | B0C000                            |
|                     |                        | 7.3728                  |                          | 6                                  | 11583488                              | B0C000                            |
|                     |                        | 11.0592                 |                          | 9                                  | 11583488                              | B0C000                            |
|                     |                        | 14.7456                 |                          | 12                                 | 11583488                              | B0C000                            |
| 869.85              | 869.840400             | 3.6864                  | High-side                | 2                                  | 7725056                               | 75E000                            |
|                     |                        | 7.3728                  |                          | 4                                  | 7725056                               | 75E000                            |
|                     |                        | 11.0592                 |                          | 6                                  | 7725056                               | 75E000                            |
|                     |                        | 14.7456                 |                          | 8                                  | 7725056                               | 75E000                            |
| 915                 | 914.998800             | 3.6864                  | High-side                | 2                                  | 8126464                               | 7C0000                            |
|                     |                        | 7.3728                  |                          | 4                                  | 8126464                               | 7C0000                            |
|                     |                        | 11.0592                 |                          | 6                                  | 8126464                               | 7C0000                            |
|                     |                        | 14.7456                 |                          | 8                                  | 8126464                               | 7C0000                            |

\*Note: When using high-side LO injection the data at DIO will be inverted.

**Table 9. Recommended settings for ISM frequencies**

## 16. VCO

Only one external inductor (L101) is required for the VCO. The inductor will determine the operating frequency range of the circuit. It is important to place the inductor as close to the pins as possible in order to reduce stray inductance. It is recommended to use a high Q, low tolerance inductor for best performance.

## 17. VCO and PLL self-calibration

To compensate for supply voltage, temperature and process variations the VCO and PLL must be calibrated. The calibration is done automatically and sets maximum VCO tuning range and optimum charge pump current for PLL stability. After setting up the device at the operating frequency, the self-calibration can be initiated by setting the *CAL\_START* bit. The calibration result is stored internally in the chip, and is valid as long as power is not turned off. If large supply voltage variations (more than 0.5 V) or temperature variations (more than 40 degrees) occur after calibration, a new calibration should be performed.

The self-calibration is controlled through the *CAL* register (see configuration registers description p. 39). The *CAL\_COMPLETE* bit indicates complete calibration. The user can poll this bit, or simply wait for 34 ms (calibration wait time when *CAL\_WAIT* = 1). The wait time is proportional to the internal PLL reference frequency. The lowest permitted reference frequency (1 MHz) gives 34 ms wait time, which is therefore the worst case.

| Reference frequency [MHz] | Calibration time [ms] |
|---------------------------|-----------------------|
| 2.4                       | 14                    |
| 2.0                       | 17                    |
| 1.5                       | 23                    |
| 1.0                       | 34                    |

The *CAL\_COMPLETE* bit can also be monitored at the *CHP\_OUT* (LOCK) pin (configured by *LOCK\_SELECT[3:0]*) and used as an interrupt input to the microcontroller.

The *CAL\_START* bit must be set to 0 by the microcontroller after the calibration is done.

Typical tuning range for the integrated varactor is 20-25%.

Component values for various frequencies are given in Table 1. Component values for other frequencies can be found using the SmartRF® Studio software.

There are separate calibration values for the two frequency registers. If the two frequencies, A and B, differ more than 1 MHz, or different VCO currents are used (*VCO\_CURRENT[3:0]* in the *CURRENT* register) the calibration should be done separately. When using a 10.7 MHz external IF the LO is 10.7 MHz below/above the transmit frequency, hence separate calibration must be done. The *CAL\_DUAL* bit in the *CAL* register controls dual or separate calibration.

The single calibration algorithm, using separate calibration for RX and TX frequency, is illustrated in Figure 16.

In Figure 17 the dual calibration algorithm is shown for two RX frequencies. It could also be used for two TX frequencies, or even for one RX and one TX frequency if the same VCO current is used.

In multi-channel and frequency hopping applications the PLL calibration values may be read and stored for later use. By reading back calibration values and frequency change can be done without doing a re-calibration which could take up to 34 ms. The calibration value is stored in the *TEST0* and *TEST2* registers after a calibration is completed. Note that when using single calibration, calibration values are stored separately for frequency registers A and B. This means that the *TEST0* and *TEST2* registers will contain calibration settings for the currently selected frequency register (selected by *F\_REG* in the *MAIN* register). The calibration value can later be written into *TEST5* and *TEST 6* to bypass the calibration. Note that you must set *VCO\_OVERRIDE*=1 in *TEST5* and *CHP\_OVERRIDE*=1 in the *TEST6* register.

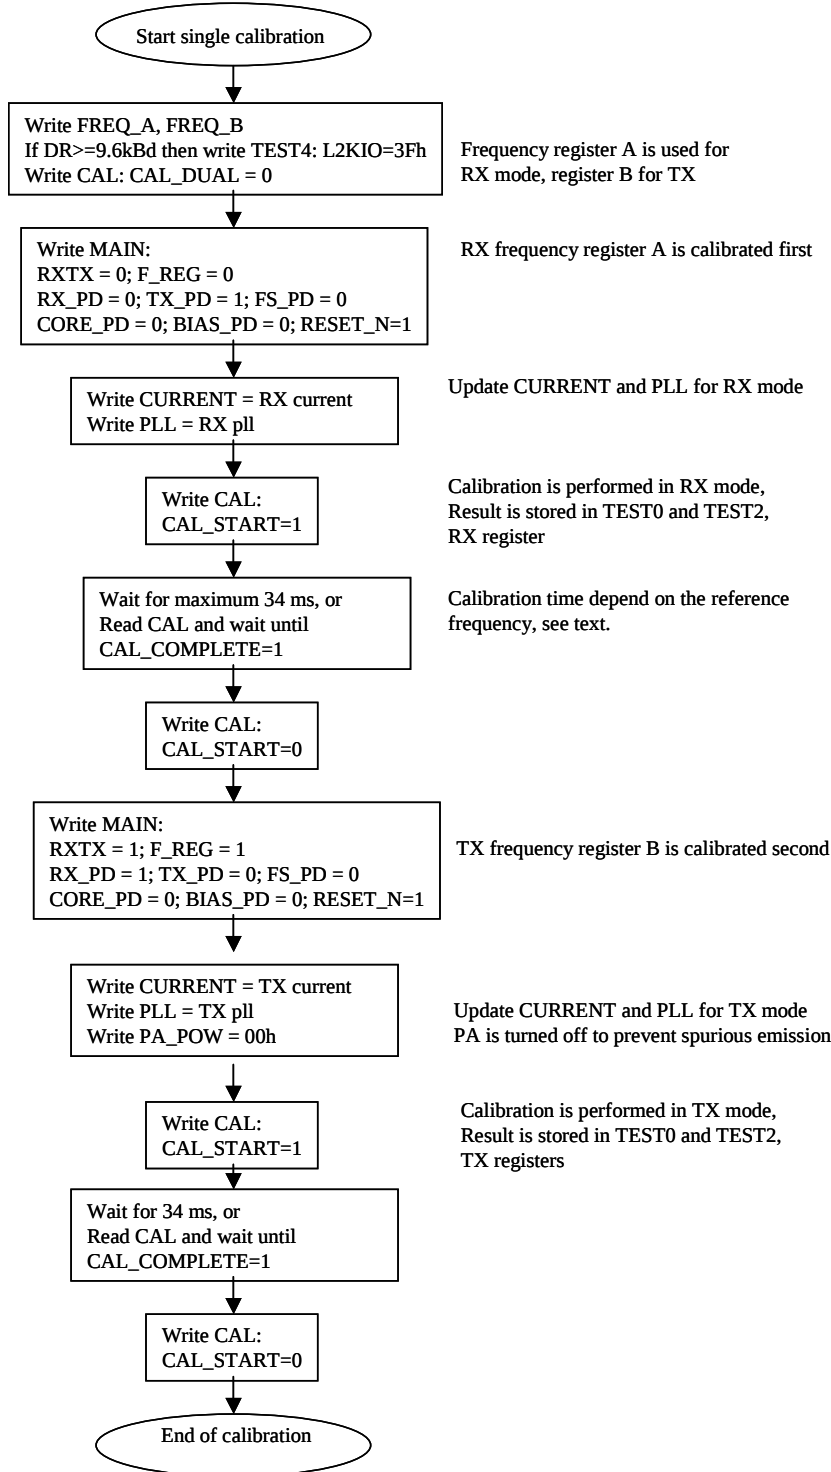


Figure 16. Single calibration algorithm for RX and TX

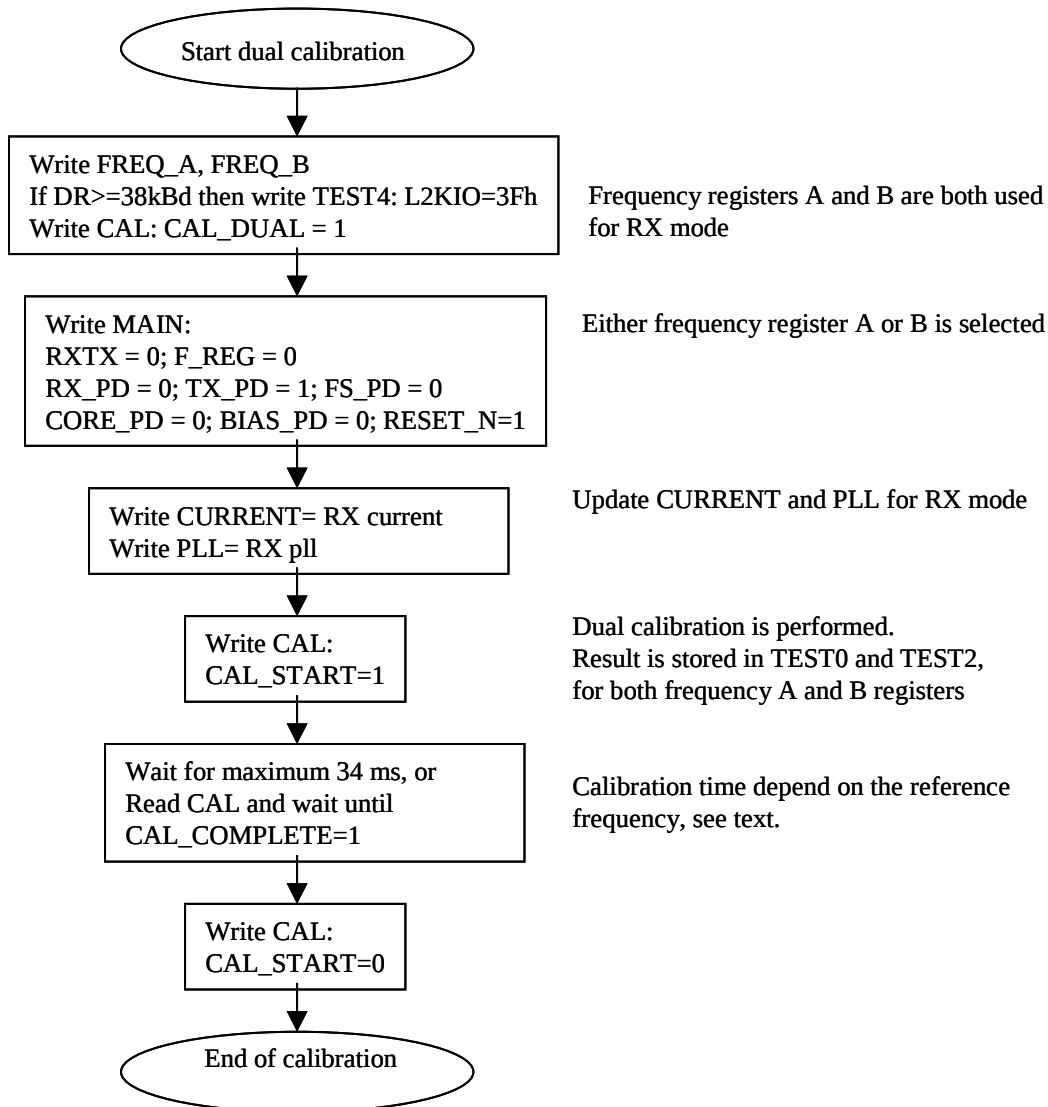


Figure 17. Dual calibration algorithm for RX mode

## 18. VCO and LNA current control

The VCO current is programmable and should be set according to operating frequency RX/TX mode and output power. Recommended settings for the *VCO\_CURRENT* bits in the *CURRENT* register are shown in the tables on page 41.

The bias current for the LNA, and the LO and PA buffers are also programmable. Table 10 shows the current consumption and receiver sensitivity for different settings (2.4 kBaud Manchester encoded data).

| RF frequency<br>[MHz] | Current<br>consumption<br>[mA] | Sensitivity<br>[dBm] | CURRENT register         |                   |                   | FRONT_END register |                      |
|-----------------------|--------------------------------|----------------------|--------------------------|-------------------|-------------------|--------------------|----------------------|
|                       |                                |                      | VCO_<br>CURRENT<br>[3:0] | LO_DRIVE<br>[1:0] | PA_DRIVE<br>[1:0] | BUF_CUR<br>RENT    | LNA_CUR<br>RENT[1:0] |
| 433                   | 9.3                            | -110                 | 0100                     | 01                | 00                | 0                  | 10                   |
| 433                   | 7.4                            | -109                 | 0100                     | 00                | 00                | 0                  | 00                   |
| 868                   | 11.8                           | -107                 | 1000                     | 11                | 00                | 1                  | 10                   |
| 868                   | 9.6                            | -105                 | 1000                     | 10                | 00                | 0                  | 00                   |

Note: Current consumption and sensitivity are typical figures at 2.4 kBaud Manchester encoded data, BER 10<sup>-3</sup>

**Table 10. Receiver sensitivity as function of current consumption**

## 19. Power management

CC1000 offers great flexibility for power management in order to meet strict power consumption requirements in battery operated applications. Power Down mode is controlled through the *MAIN* register. There are separate bits to control the RX part, the TX part, the frequency synthesiser and the crystal oscillator (see page 39). This individual control can be used to optimise for lowest possible current consumption in a certain application.

A typical power-on and initialising sequence for minimum power consumption is shown in Figure 18 and Figure 19.

PALE should be tri-stated or set to a high level during power down mode in order to prevent a trickle current from flowing in the internal pull-up resistor.

PA\_POW should be set to 00h before power down mode to ensure lowest possible leakage current.

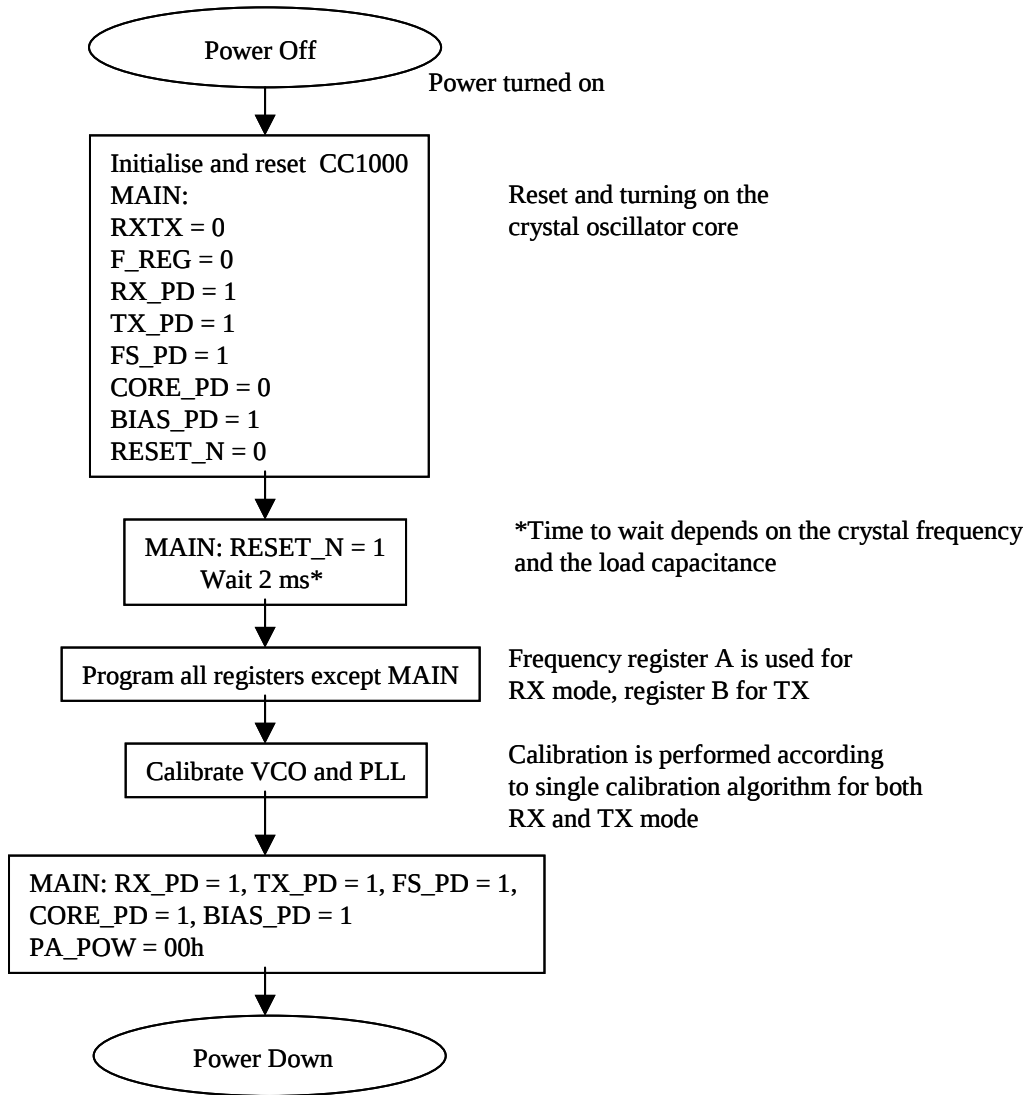


Figure 18. Initializing sequence


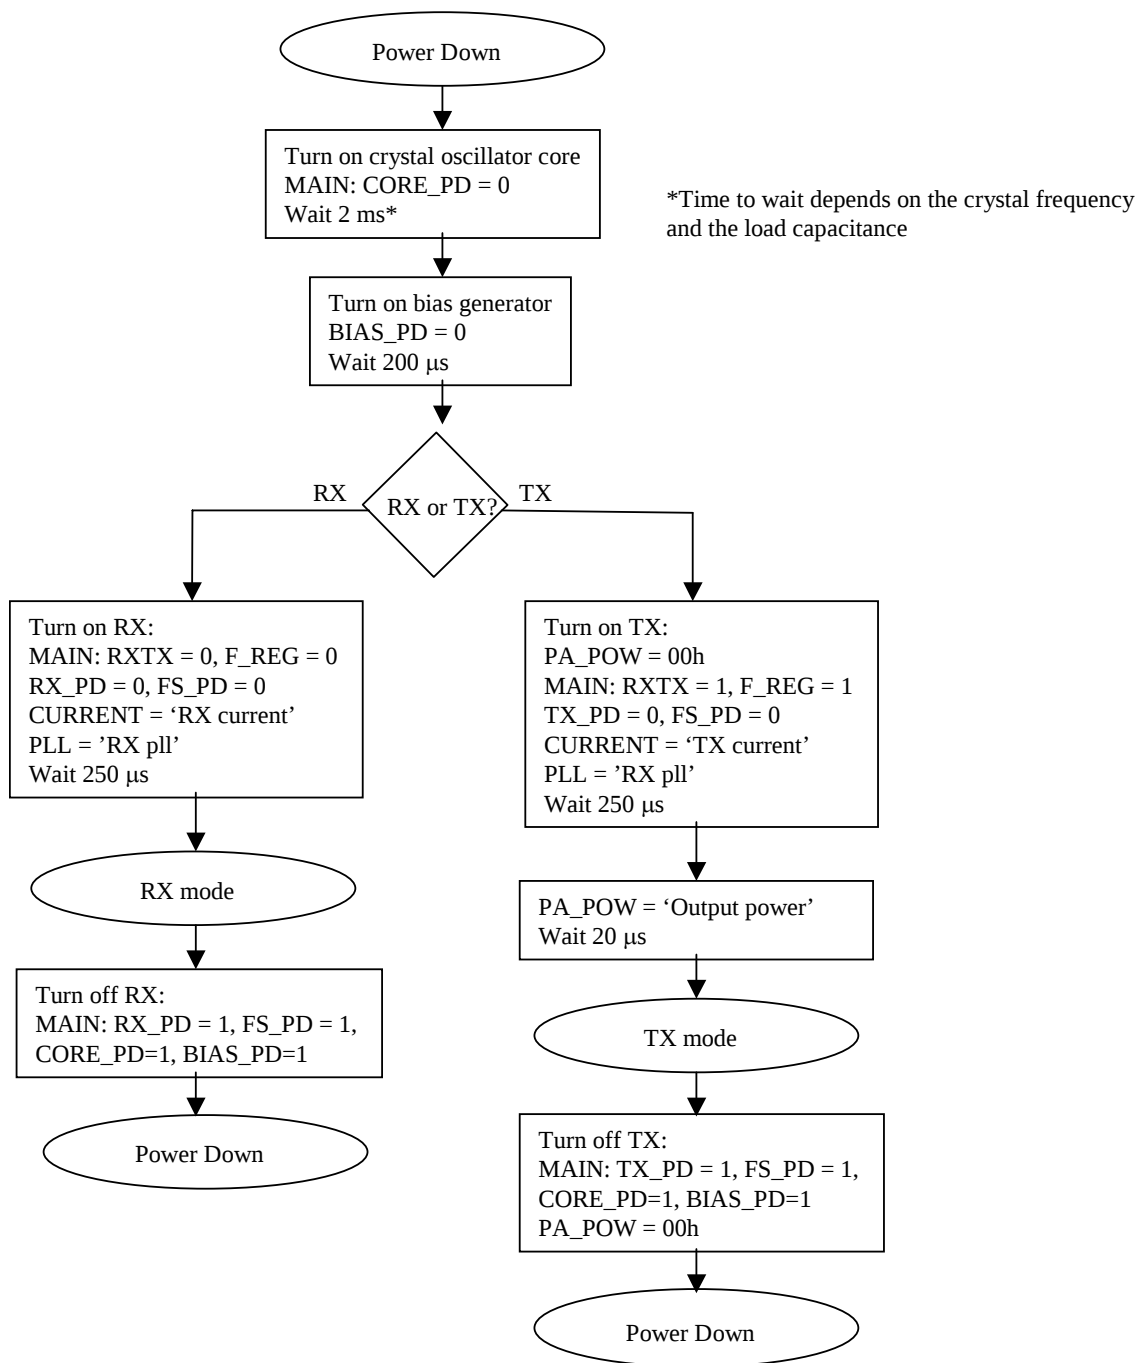


Figure 19. Sequence for activating RX or TX mode

## 20. Input / Output Matching

A few passive external components combined with the internal T/R switch circuitry ensures match in both RX and TX mode. The matching network is shown in Figure 20.

Component values for various frequencies are given in Table 1. Component values for other frequencies can be found using the configuration software.

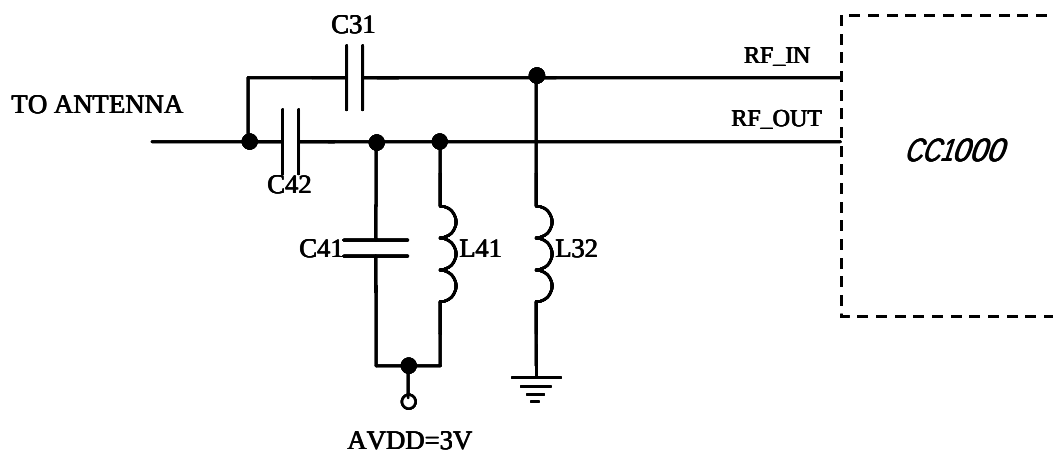

**Figure 20. Input/output matching network**

## 21. Output power programming

The RF output power is programmable and controlled by the PA\_POW register. Table 11 shows the closest programmable value for output powers in steps of 1 dB. The typical current consumption is also shown.

In power down mode the PA\_POW should be set to 00h for minimum leakage current.

| Output power [dBm] | RF frequency 433 MHz |                                | RF frequency 868 MHz |                                |
|--------------------|----------------------|--------------------------------|----------------------|--------------------------------|
|                    | PA_POW [hex]         | Current consumption, typ. [mA] | PA_POW [hex]         | Current consumption, typ. [mA] |
| -20                | 01                   | 6.9                            | 02                   | 8.6                            |
| -19                | 01                   | 6.9                            | 02                   | 8.8                            |
| -18                | 02                   | 7.1                            | 03                   | 9.0                            |
| -17                | 02                   | 7.1                            | 03                   | 9.0                            |
| -16                | 02                   | 7.1                            | 04                   | 9.1                            |
| -15                | 03                   | 7.4                            | 05                   | 9.3                            |
| -14                | 03                   | 7.4                            | 05                   | 9.3                            |
| -13                | 03                   | 7.4                            | 06                   | 9.5                            |
| -12                | 04                   | 7.6                            | 07                   | 9.7                            |
| -11                | 04                   | 7.6                            | 08                   | 9.9                            |
| -10                | 05                   | 7.9                            | 09                   | 10.1                           |
| -9                 | 05                   | 7.9                            | 0B                   | 10.4                           |
| -8                 | 06                   | 8.2                            | 0C                   | 10.6                           |
| -7                 | 07                   | 8.4                            | 0D                   | 10.8                           |
| -6                 | 08                   | 8.7                            | 0F                   | 11.1                           |
| -5                 | 09                   | 8.9                            | 40                   | 13.8                           |
| -4                 | 0A                   | 9.6                            | 50                   | 14.5                           |
| -3                 | 0B                   | 9.4                            | 50                   | 14.5                           |
| -2                 | 0C                   | 9.7                            | 60                   | 15.1                           |
| -1                 | 0E                   | 10.2                           | 70                   | 15.8                           |
| 0                  | 0F                   | 10.4                           | 80                   | 16.8                           |
| 1                  | 40                   | 11.8                           | 90                   | 17.2                           |
| 2                  | 50                   | 12.8                           | B0                   | 18.5                           |
| 3                  | 50                   | 12.8                           | C0                   | 19.2                           |
| 4                  | 60                   | 13.8                           | F0                   | 21.3                           |
| 5                  | 70                   | 14.8                           | FF                   | 25.4                           |
| 6                  | 80                   | 15.8                           |                      |                                |
| 7                  | 90                   | 16.8                           |                      |                                |
| 8                  | C0                   | 20.0                           |                      |                                |
| 9                  | E0                   | 22.1                           |                      |                                |
| 10                 | FF                   | 26.7                           |                      |                                |

**Table 11. Output power settings and typical current consumption**

## 22. RSSI output

CC1000 has a built-in RSSI (Received Signal Strength Indicator) giving an analogue output signal at the RSSI/IF pin. The *IF\_RSSI* bits in the *FRONT\_END* register enable the RSSI. When the RSSI function is enabled, the output current of this pin is inversely proportional to the input signal level. The output should be terminated in a resistor to convert the current output into a voltage. A capacitor is used in order to low-pass filter the signal.

The RSSI voltage range from 0 – 1.2 V when using a 27 kΩ terminating resistor, giving approximately 50 dB/V. This RSSI voltage can be measured by an A/D converter. Note that a higher voltage means a lower input signal.

The RSSI measures the power referred to the RF\_IN pin. The input power can be calculated using the following equations:

$$P = -51.3 V_{RSSI} - 49.2 \text{ [dBm]} \text{ at } 433 \text{ MHz}$$

$$P = -50.0 V_{RSSI} - 45.5 \text{ [dBm]} \text{ at } 868 \text{ MHz}$$

The external network for RSSI operation is shown in Figure 21. R281 = 27 kΩ, C281 = 1nF.

A typical plot of RSSI voltage as function of input power is shown in Figure 22.

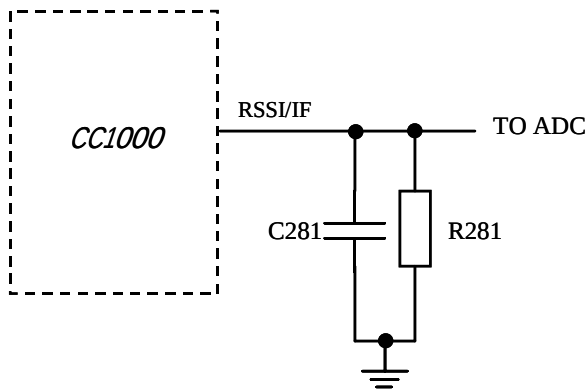


Figure 21. RSSI circuit


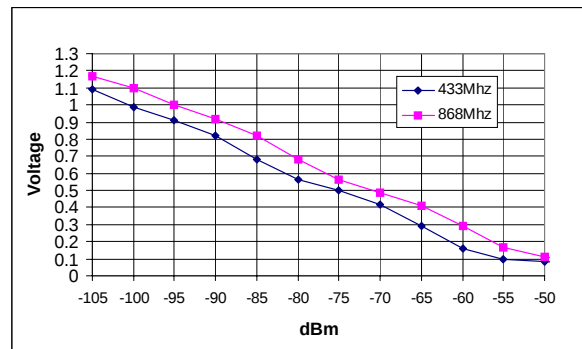


Figure 22. RSSI voltage vs. input power

## 23. IF output

*CC1000* has a built-in 10.7 MHz IF output buffer. This buffer could be applied in narrowband applications with requirements on mirror image filtering. The system is then built with *CC1000*, a 10.7 MHz ceramic filter and an external 10.7 MHz demodulator. The external network for IF output operation is shown in Figure 23. R281 = 470  $\Omega$ , C281 = 3.3nF.

The external network provides 330  $\Omega$  source impedance for the 10.7 MHz ceramic filter.

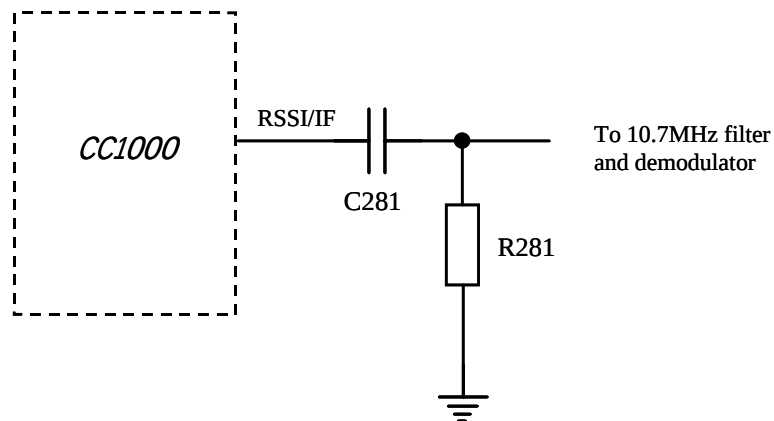

**Figure 23. IF output circuit**

## 24. Crystal oscillator

CC1000 has an advanced amplitude regulated crystal oscillator. A high current is used to start up the oscillations. When the amplitude builds up, the current is reduced to what is necessary to maintain a 600 mVpp amplitude. This ensures a fast start-up, keeps the current consumption as well as the drive level to a minimum and makes the oscillator insensitive to ESR variations.

An external clock signal or the internal crystal oscillator can be used as main frequency reference. An external clock signal should be connected to XOSC\_Q1, while XOSC\_Q2 should be left open. The XOSC\_BYPASS bit in the FRONT\_END register should be set when an external clock signal is used.

The crystal frequency should be in the range 3-4, 6-8 or 9-16 MHz. Because the crystal frequency is used as reference for the data rate (as well as other internal functions), the following frequencies are recommended: 3.6864, 7.3728, 11.0592 or 14.7456 MHz. These frequencies will give accurate data rates. The crystal frequency range is selected by XOSC\_FREQ1:0 in the MODEM0 register.

To operate in synchronous mode at data rates different from the standards at 1.2, 2.4, 4.8 kBaud and so on, the crystal frequency can be scaled. The data rate (DR) will change proportionally to the new crystal frequency (f). To calculate the new crystal frequency:

$$f_{xtal\_new} = f_{xtal} \frac{DR_{new}}{DR}$$

Using the internal crystal oscillator, the crystal must be connected between XOSC\_Q1 and XOSC\_Q2. The oscillator is designed for parallel mode operation of the crystal. In addition loading capacitors (C171 and C181) for the crystal are required. The loading capacitor values depend on the total load capacitance,  $C_L$ , specified for the crystal. The total load capacitance seen between the crystal terminals should equal  $C_L$  for the crystal to oscillate at the specified frequency.

$$C_L = \frac{1}{\frac{1}{C_{171}} + \frac{1}{C_{181}}} + C_{parasitic}$$

The parasitic capacitance is constituted by pin input capacitance and PCB stray capacitance. Typically the total parasitic capacitance is 8 pF. A trimming capacitor may be placed across C171 for initial tuning if necessary.

The crystal oscillator circuit is shown in Figure 24. Typical component values for different values of  $C_L$  are given in Table 12.

The initial tolerance, temperature drift, ageing and load pulling should be carefully specified in order to meet the required frequency accuracy in a certain application. By specifying the total expected frequency accuracy in SmartRF® Studio together with data rate and frequency separation, the software will calculate the total bandwidth and compare to the available IF bandwidth.

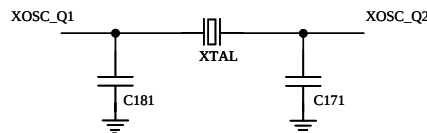


Figure 24. Crystal oscillator circuit


| Item | $C_L = 12$ pF | $C_L = 16$ pF | $C_L = 22$ pF |
|------|---------------|---------------|---------------|
| C171 | 6.8 pF        | 18 pF         | 33 pF         |
| C181 | 6.8 pF        | 18 pF         | 33 pF         |

Table 12. Crystal oscillator component values

## 25. Optional LC Filter

An optional LC filter may be added between the antenna and the matching network in certain applications. The filter will reduce the emission of harmonics and increase the receiver selectivity.

The filter topology is shown in Figure 25. Component values are given in Table 13. The filter is designed for 50  $\Omega$  terminations. The component values may have to be tuned to compensate for layout parasitics.

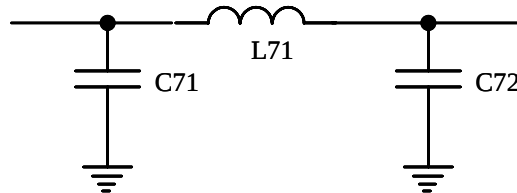

**Figure 25. LC filter**

| Item | 315 MHz | 433 MHz | 868 MHz | 915 MHz |
|------|---------|---------|---------|---------|
| C71  | 30 pF   | 20 pF   | 10 pF   | 10 pF   |
| C72  | 30 pF   | 20 pF   | 10 pF   | 10 pF   |
| L71  | 15 nH   | 12 nH   | 5.6 nH  | 4.7 nH  |

**Table 13. LC filter component values**

## 26. System Considerations and Guidelines

### 26.1 SRD regulations

International regulations and national laws regulate the use of radio receivers and transmitters. SRDs (Short Range Devices) for licence free operation are allowed to operate in the 433 and 868-870 MHz bands in most European countries. In the United States such devices operate in the 260–470 and 902-928 MHz bands. *CC1000* is designed to meet the requirements for operation in all these bands. A summary of the most important aspects of these regulations can be found in Application Note *AN001 SRD regulations for licence free transceiver operation*, available from Chipcon's web site.

### 26.2 Low cost systems

In systems where low cost is of great importance the *CC1000* is the ideal choice. Very few external components keep the total cost at a minimum. The oscillator crystal can then be a low cost crystal with 50 ppm frequency tolerance.

### 26.3 Battery operated systems

In low power applications the power down mode should be used when not being active. Depending on the start-up time requirement, the oscillator core can be powered during power down. See page 28 for information on how effective power management can be implemented.

### 26.4 Crystal drift compensation

A unique feature in *CC1000* is the very fine frequency resolution of 250 Hz. This can be used to do the temperature compensation of the crystal if the temperature drift curve is known and a temperature sensor is included in the system. Even initial adjustment can be done using the frequency programmability. This eliminates the need for an expensive

TCXO and trimming in some applications. In less demanding applications a crystal with low temperature drift and low ageing could be used without further compensation. A trimmer capacitor in the crystal oscillator circuit (in parallel with C171) could be used to set the initial frequency accurately. The fine frequency step programming cannot be used in RX mode if optimised frequency settings are required (see page 24).

### 26.5 High reliability systems

Using a SAW filter as a preselector will improve the communication reliability in harsh environments by reducing the probability of blocking. The receiver sensitivity and the output power will be reduced due to the filter insertion loss. By inserting the filter in the RX path only, together with an external RX/TX switch, only the receiver sensitivity is reduced, and output power is remained. The CHP\_OUT (LOCK) pin can be configured to control an external LNA, RX/TX switch or power amplifier. This is controlled by *LOCK\_SELECT* in the *LOCK* register.

### 26.6 Frequency hopping spread spectrum systems

Due to the very fast frequency shift properties of the PLL, the *CC1000* is also suitable for frequency hopping systems. Hop rates of 1-100 hops/s are usually used depending on the bit rate and the amount of data to be sent during each transmission. The two frequency registers (*FREQ\_A* and *FREQ\_B*) are designed such that the 'next' frequency can be programmed while the 'present' frequency is used. The switching between the two frequencies is done through the *MAIN* register.

## 27. PCB Layout Recommendations

Chipcon provide reference layouts that should be followed in order to achieve the best performance. The Chipcon reference design (CC1000PP and CC1000uCSP\_EM) can be downloaded from the Chipcon website.

A two layer PCB is highly recommended. The bottom layer of the PCB should be the “ground-layer”.

The top layer should be used for signal routing, and the open areas should be filled with etalization connected to ground using several vias.

The ground pins should be connected to ground as close as possible to the package pin using individual vias. The de-coupling capacitors should also be placed as close as possible to the supply pins and connected to the ground plane by separate vias.

The external components should be as small as possible and surface mount

devices are required. The VCO inductor must be placed as close as possible to the chip and symmetrical with respect to the input pins.

Precaution should be used when placing the microcontroller in order to avoid interference with the RF circuitry.

In certain applications where the ground plane for the digital circuitry is expected to be noisy, the ground plane may be split in an analogue and a digital part. All AGND pins and AVDD de-coupling capacitors should be connected to the analogue ground plane. All DGND pins and DVDD de-coupling capacitors should be connected to the digital ground. The connection between the two ground planes should be implemented as a star connection with the power supply ground.

A development kit with a fully assembled PCB is available, and can be used as a guideline for layout.

## 28. Antenna Considerations

*CC1000* can be used together with various types of antennas. The most common antennas for short range communication are monopole, helical and loop antennas.

Monopole antennas are resonant antennas with a length corresponding to one quarter of the electrical wavelength ( $\lambda/4$ ). They are very easy to design and can be implemented simply as a “piece of wire” or even integrated into the PCB.

Non-resonant monopole antennas shorter than  $\lambda/4$  can also be used, but at the expense of range. In size and cost critical applications such an antenna may very well be integrated into the PCB.

Helical antennas can be thought of as a combination of a monopole and a loop antenna. They are a good compromise in size critical applications. But helical antennas tend to be more difficult to optimise than the simple monopole.

Loop antennas are easy to integrate into the PCB, but are less effective due to

difficult impedance matching because of their very low radiation resistance.

For low power applications the  $\lambda/4$ -monopole antenna is recommended giving the best range and because of its simplicity.

The length of the  $\lambda/4$ -monopole antenna is given by:

$$L = 7125 / f$$

where  $f$  is in MHz, giving the length in cm. An antenna for 869 MHz should be 8.2 cm, and 16.4 cm for 434 MHz.

The antenna should be connected as close as possible to the IC. If the antenna is located away from the input pin the antenna should be matched to the feeding transmission line ( $50 \Omega$ ).

For a more thorough primer on antennas, please refer to Application Note AN003 *SRD Antennas* available from Chipcon's web site.

## 29. Configuration registers

The configuration of CC1000 is done by programming 22 8-bit configuration registers. The configuration data based on selected system parameters are most easily found by using the SmartRF®

Studio software. A complete description of the registers are given in the following tables. After a RESET is programmed all the registers have default values.

### REGISTER OVERVIEW

| ADDRESS | Byte Name | Description                                                             |
|---------|-----------|-------------------------------------------------------------------------|
| 00h     | MAIN      | MAIN Register                                                           |
| 01h     | FREQ_2A   | Frequency Register 2A                                                   |
| 02h     | FREQ_1A   | Frequency Register 1A                                                   |
| 03h     | FREQ_0A   | Frequency Register 0A                                                   |
| 04h     | FREQ_2B   | Frequency Register 2B                                                   |
| 05h     | FREQ_1B   | Frequency Register 1B                                                   |
| 06h     | FREQ_0B   | Frequency Register 0B                                                   |
| 07h     | FSEP1     | Frequency Separation Register 1                                         |
| 08h     | FSEP0     | Frequency Separation Register 0                                         |
| 09h     | CURRENT   | Current Consumption Control Register                                    |
| 0Ah     | FRONT_END | Front End Control Register                                              |
| 0Bh     | PA_POW    | PA Output Power Control Register                                        |
| 0Ch     | PLL       | PLL Control Register                                                    |
| 0Dh     | LOCK      | LOCK Status Register and signal select to CHP_OUT (LOCK) pin            |
| 0Eh     | CAL       | VCO Calibration Control and Status Register                             |
| 0Fh     | MODEM2    | Modem Control Register 2                                                |
| 10h     | MODEM1    | Modem Control Register 1                                                |
| 11h     | MODEM0    | Modem Control Register 0                                                |
| 12h     | MATCH     | Match Capacitor Array Control Register for RX and TX impedance matching |
| 13h     | FSCTRL    | Frequency Synthesiser Control Register                                  |
| 14h     |           | Reserved                                                                |
| 15h     |           | Reserved                                                                |
| 16h     |           | Reserved                                                                |
| 17h     |           | Reserved                                                                |
| 18h     |           | Reserved                                                                |
| 19h     |           | Reserved                                                                |
| 1Ah     |           | Reserved                                                                |
| 1Bh     |           | Reserved                                                                |
| 1Ch     | PRESCALER | Prescaler and IF-strip test control register                            |
| 40h     | TEST6     | Test register for PLL LOOP                                              |
| 41h     | TEST5     | Test register for PLL LOOP                                              |
| 42h     | TEST4     | Test register for PLL LOOP (must be updated as specified)               |
| 43h     | TEST3     | Test register for VCO                                                   |
| 44h     | TEST2     | Test register for Calibration                                           |
| 45h     | TEST1     | Test register for Calibration                                           |
| 46h     | TEST0     | Test register for Calibration                                           |

MAIN Register (00h)

| REGISTER | NAME    | Default value | Active | Description                                                                                                                                                                                                                                         |
|----------|---------|---------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAIN[7]  | RXTX    | -             | -      | RX/TX switch, 0 : RX , 1 : TX                                                                                                                                                                                                                       |
| MAIN[6]  | F_REG   | -             | -      | Selection of Frequency Register, 0 : Register A, 1 : Register B                                                                                                                                                                                     |
| MAIN[5]  | RX_PD   | -             | H      | Power Down of LNA, Mixer, IF, Demodulator, RX part of Signal Interface                                                                                                                                                                              |
| MAIN[4]  | TX_PD   | -             | H      | Power Down of TX part of Signal Interface, PA                                                                                                                                                                                                       |
| MAIN[3]  | FS_PD   | -             | H      | Power Down of Frequency Synthesiser                                                                                                                                                                                                                 |
| MAIN[2]  | CORE_PD | -             | H      | Power Down of Crystal Oscillator Core                                                                                                                                                                                                               |
| MAIN[1]  | BIAS_PD | -             | H      | Power Down of BIAS (Global_Current_Generator) and Crystal Oscillator Buffer                                                                                                                                                                         |
| MAIN[0]  | RESET_N | -             | L      | Reset, active low. Writing RESET_N low will write default values to all other registers than MAIN. Bits in MAIN do not have a default value, and will be written directly through the configurations interface. Must be set high to complete reset. |

FREQ\_2A Register (01h)

| REGISTER     | NAME          | Default value | Active | Description                       |
|--------------|---------------|---------------|--------|-----------------------------------|
| FREQ_2A[7:0] | FREQ_A[23:16] | 01110101      | -      | 8 MSB of frequency control word A |

FREQ\_1A Register (02h)

| REGISTER     | NAME         | Default value | Active | Description                             |
|--------------|--------------|---------------|--------|-----------------------------------------|
| FREQ_1A[7:0] | FREQ_A[15:8] | 10100000      | -      | Bit 15 to 8 of frequency control word A |

FREQ\_0A Register (03h)

| REGISTER     | NAME        | Default value | Active | Description                       |
|--------------|-------------|---------------|--------|-----------------------------------|
| FREQ_0A[7:0] | FREQ_A[7:0] | 11001011      | -      | 8 LSB of frequency control word A |

FREQ\_2B Register (04h)

| REGISTER     | NAME          | Default value | Active | Description                       |
|--------------|---------------|---------------|--------|-----------------------------------|
| FREQ_2B[7:0] | FREQ_B[23:16] | 01110101      | -      | 8 MSB of frequency control word B |

FREQ\_1B Register (05h)

| REGISTER     | NAME         | Default value | Active | Description                             |
|--------------|--------------|---------------|--------|-----------------------------------------|
| FREQ_1B[7:0] | FREQ_B[15:8] | 10100101      | -      | Bit 15 to 8 of frequency control word B |

FREQ\_0B Register (06h)

| REGISTER     | NAME        | Default value | Active | Description                       |
|--------------|-------------|---------------|--------|-----------------------------------|
| FREQ_0B[7:0] | FREQ_B[7:0] | 01001110      | -      | 8 LSB of frequency control word B |

FSEP1 Register (07h)

| REGISTER   | NAME          | Default value | Active | Description                           |
|------------|---------------|---------------|--------|---------------------------------------|
| FSEP1[7:3] | -             | -             | -      | Not used                              |
| FSEP1[2:0] | FSEP_MSB[2:0] | 000           | -      | 3 MSB of frequency separation control |

FSEP0 Register (08h)

| REGISTER   | NAME          | Default value | Active | Description                           |
|------------|---------------|---------------|--------|---------------------------------------|
| FSEP0[7:0] | FSEP_LSB[7:0] | 01011001      | -      | 8 LSB of frequency separation control |

## CURRENT Register (09h)

| REGISTER     | NAME             | Default value | Active | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------|------------------|---------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CURRENT[7:4] | VCO_CURRENT[3:0] | 1100          | -      | Control of current in VCO core for TX and RX<br>0000 : 150 $\mu$ A<br>0001 : 250 $\mu$ A<br>0010 : 350 $\mu$ A<br>0011 : 450 $\mu$ A<br>0100 : 950 $\mu$ A, use for RX, f= 400 – 500 MHz<br>0101 : 1050 $\mu$ A<br>0110 : 1150 $\mu$ A<br>0111 : 1250 $\mu$ A<br>1000 : 1450 $\mu$ A, use for RX, f<400 MHz and f>500 MHz; and TX, f= 400 – 500 MHz<br>1001 : 1550 $\mu$ A, use for TX, f<400 MHz<br>1010 : 1650 $\mu$ A<br>1011 : 1750 $\mu$ A<br>1100 : 2250 $\mu$ A<br>1101 : 2350 $\mu$ A<br>1110 : 2450 $\mu$ A<br>1111 : 2550 $\mu$ A, use for TX, f>500 MHz |
| CURRENT[3:2] | LO_DRIVE[1:0]    | 10            |        | Control of current in VCO buffer for LO drive<br>00 : 0.5mA, use for TX<br>01 : 1.0mA , use for RX, f<500 MHz*<br>10 : 1.5mA,<br>11 : 2.0mA, use for RX, f>500 MHz *<br><br>* LO_DRIVE can be reduced to save current in RX mode. See Table 10 for details                                                                                                                                                                                                                                                                                                         |
| CURRENT[1:0] | PA_DRIVE[1:0]    | 10            |        | Control of current in VCO buffer for PA<br>00 : 1mA, use for RX<br>01 : 2mA, use for TX, f<500 MHz<br>10 : 3mA<br>11 : 4mA, use for TX, f>500 MHz                                                                                                                                                                                                                                                                                                                                                                                                                  |

## FRONT\_END Register (0Ah)

| REGISTER       | NAME              | Default value | Active | Description                                                                                                                                                                                                                                 |
|----------------|-------------------|---------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FRONT_END[7:6] | -                 | 00            | -      | Not used                                                                                                                                                                                                                                    |
| FRONT_END[5]   | BUF_CURRENT       | 0             | -      | Control of current in the LNA_FOLLOWER<br>0 : 520uA, use for f<500 MHz<br>1 : 690uA, use for f>500 MHz *<br><br>*BUF_CURRENT can be reduced to save current in RX mode. See Table 10 for details.                                           |
| FRONT_END[4:3] | LNA_CURRENT [1:0] | 01            | -      | Control of current in LNA<br>00 : 0.8mA, use for f<500 MHz *<br>01 : 1.4mA<br>10 : 1.8mA, use for f>500 MHz *<br>11 : 2.2mA<br><br>*LNA_CURRENT can be reduced to save current in RX mode. See Table 10 for details.                        |
| FRONT_END[2:1] | IF_RSSI[1:0]      | 00            | -      | Control of IF_RSSI pin<br>00 : Internal IF and demodulator, RSSI inactive<br>01 : RSSI active, RSSI/IF is analog RSSI output<br>10 : External IF and demodulator, RSSI/IF is mixer output. Internal IF in power down mode.<br>11 : Not used |
| FRONT_END[0]   | XOSC_BYPASS       | 0             | -      | 0 : Internal XOSC enabled<br>1 : Power-Down of XOSC, external CLK used                                                                                                                                                                      |

PA\_POW Register (0Bh)

| REGISTER    | NAME              | Default value | Active | Description                                                                                                |
|-------------|-------------------|---------------|--------|------------------------------------------------------------------------------------------------------------|
| PA_POW[7:4] | PA_HIGHPOWER[3:0] | 0000          | -      | Control of output power in high power array. Should be 0000 in PD mode . See Table 11 page 32 for details. |
| PA_POW[3:0] | PA_LOWPOWER[3:0]  | 1111          | -      | Control of output power in low power array. Should be 0000 in PD mode. See Table 11 page 32 for details.   |

PLL Register (0Ch)

| REGISTER | NAME          | Default value | Active | Description                                                                                                                                   |
|----------|---------------|---------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| PLL[7]   | EXT_FILTER    | 0             | -      | 1 : External loop filter<br>0 : Internal loop filter<br><br>1-to-0 transition samples F_COMP comparator when BREAK_LOOP=1 (TEST3)             |
| PLL[6:3] | REFDIV[3:0]   | 0010          | -      | Reference divider<br><br>0000 : Not allowed<br>0001 : Not allowed<br>0010 : Divide by 2<br>0011 : Divide by 3<br>.....<br>1111 : Divide by 15 |
| PLL[2]   | ALARM_DISABLE | 0             | h      | 0 : Alarm function enabled<br>1 : Alarm function disabled                                                                                     |
| PLL[1]   | ALARM_H       | -             | -      | Status bit for tuning voltage out of range (too close to VDD)                                                                                 |
| PLL[0]   | ALARM_L       | -             | -      | Status bit for tuning voltage out of range (too close to GND)                                                                                 |

LOCK Register (0Dh)

| REGISTER  | NAME              | Default value | Active | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------|-------------------|---------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LOCK[7:4] | LOCK_SELECT[3:0]  | 0000          | -      | Selection of signals to CHP_OUT (LOCK) pin<br><br>0000 : Normal, pin can be used as CHP_OUT<br>0001 : LOCK_CONTINUOUS (active high)<br>0010 : LOCK_INSTANT (active high)<br>0011 : ALARM_H (active high)<br>0100 : ALARM_L (active high)<br>0101 : CAL_COMPLETE (active high)<br>0110 : IF_OUT<br>0111 : REFERENCE_DIVIDER Output<br>1000 : TX_PDB (active high, activates external PA when TX_PD=0)<br>1001 : Manchester Violation (active high)<br>1010 : RX_PDB (active high, activates external LNA when RX_PD=0)<br>1011 : Not defined<br>1100 : Not defined<br>1101 : LOCK_AVG_FILTER<br>1110 : N_DIVIDER Output<br>1111 : F_COMP |
| LOCK[3]   | PLL_LOCK_ACCURACY | 0             | -      | 0 : Sets Lock Threshold = 127, Reset Lock Threshold = 111. Corresponds to a worst case accuracy of 0.7%<br>1 : Sets Lock Threshold = 31, Reset Lock Threshold = 15. Corresponds to a worst case accuracy of 2.8%                                                                                                                                                                                                                                                                                                                                                                                                                        |
| LOCK[2]   | PLL_LOCK_LENGTH   | 0             | -      | 0 : Normal PLL lock window<br>1 : Not used                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| LOCK[1]   | LOCK_INSTANT      | -             | -      | Status bit from Lock Detector                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| LOCK[0]   | LOCK_CONTINUOUS   | -             | -      | Status bit from Lock Detector                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

CAL Register (0Eh)

| REGISTER | NAME         | Default value | Active | Description                                                                                                                                                                                          |
|----------|--------------|---------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAL[7]   | CAL_START    | 0             | ↑      | ↑ 1 : Calibration started<br>0 : Calibration inactive<br>CAL_START must be set to 0 after calibration is done                                                                                        |
| CAL[6]   | CAL_DUAL     | 0             | H      | 1 : Store calibration in both A and B<br>0 : Store calibration in A or B defined by MAIN[6]                                                                                                          |
| CAL[5]   | CAL_WAIT     | 0             | H      | 1 : Normal Calibration Wait Time<br>0 : Half Calibration Wait Time<br><br>The calibration time is proportional to the internal reference frequency. 2 MHz reference frequency gives 14 ms wait time. |
| CAL[4]   | CAL_CURRENT  | 0             | H      | 1 : Calibration Current Doubled<br>0 : Normal Calibration Current                                                                                                                                    |
| CAL[3]   | CAL_COMPLETE | 0             | H      | Status bit defining that calibration is complete                                                                                                                                                     |
| CAL[2:0] | CAL_ITERATE  | 101           | H      | Iteration start value for calibration DAC<br>000 – 101: Not used<br>110 : Normal start value<br>111 : Not used                                                                                       |

MODEM2 Register (0Fh)

| REGISTER    | NAME                   | Default value | Active | Description                                                                                                                            |
|-------------|------------------------|---------------|--------|----------------------------------------------------------------------------------------------------------------------------------------|
| MODEM2[7]   | PEAKDETECT             | 1             | H      | Peak Detector and Remover disabled or enabled<br>0 : Peak detector and remover is disabled<br>1 : Peak detector and remover is enabled |
| MODEM2[6:0] | PEAK_LEVEL_OFFSET[6:0] | 0010110       | -      | Threshold level for Peak Remover in Demodulator. Correlated to frequency deviation, see note.                                          |

Note:  $PEAK\_LEVEL\_OFFSET[6:0] = \frac{F_s}{IF_{low}} - \frac{F_s}{IF_{low} + \Delta f} \cdot \frac{5}{8}$  where  $F_s = \frac{f_{XOSC}}{XOSC\_FREQ + 1}$

and  $IF_{low} = 150kHz - 2 \cdot f_{rf} \cdot XTAL\_accuracy$  and  $\Delta f$  is the separation

MODEM1 Register (10h)

| REGISTER    | NAME          | Default value | Active | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|---------------|---------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MODEM1[7:5] | MLIMIT        | 011           | -      | Sets the limit for the Manchester Violation Flag. A Manchester Value = 14 is a perfect bit and a Manchester Value = 0 is a constant level (an unbalanced corrupted bit)<br><br>000 : No Violation Flag is set<br>001 : Violation Flag is set for Manchester Value < 1<br>010 : Violation Flag is set for Manchester Value < 2<br>011 : Violation Flag is set for Manchester Value < 3<br>100 : Violation Flag is set for Manchester Value < 4<br>101 : Violation Flag is set for Manchester Value < 5<br>110 : Violation Flag is set for Manchester Value < 6<br>111 : Violation Flag is set for Manchester Value < 7 |
| MODEM1[4]   | LOCK_AVG_IN   | 0             | H      | Lock control bit of Average Filter<br><br>0 : Average Filter is free-running<br>1 : Average Filter is locked                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| MODEM1[3]   | LOCK_AVG_MODE | 0             | -      | Automatic lock of Average Filter<br><br>0 : Lock of Average Filter is controlled automatically<br>1 : Lock of Average Filter is controlled by LOCK_AVG_IN                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| MODEM1[2:1] | SETTLING[1:0] | 11            | -      | Settling Time of Average Filter<br><br>00 : 11 baud settling time, worst case 1.2dB loss in sensitivity<br>01 : 22 baud settling time, worst case 0.6dB loss in sensitivity<br>10 : 43 baud settling time, worst case 0.3dB loss in sensitivity<br>11 : 86 baud settling time, worst case 0.15dB loss in sensitivity                                                                                                                                                                                                                                                                                                  |
| MODEM1[0]   | MODEM_RESET_N | 1             | L      | Separate reset of MODEM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**MODEM0 Register (11h)**

| REGISTER    | NAME             | Default value | Active | Description                                                                                                                                                                                                                                                                                                                         |
|-------------|------------------|---------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MODEM0[7]   | -                | -             | -      | Not used                                                                                                                                                                                                                                                                                                                            |
| MODEM0[6:4] | BAUDRATE[2:0]    | 010           | -      | 000 : 0.6 kBaud<br>001 : 1.2 kBaud<br>010 : 2.4 kBaud<br>011 : 4.8 kBaud<br>100 : 9.6 kBaud<br>101 : 19.2, 38.4 and 76.8 kBaud<br>110 : Not used<br>111 : Not used                                                                                                                                                                  |
| MODEM0[3:2] | DATA_FORMAT[1:0] | 01            | -      | 00 : NRZ operation.<br>01 : Manchester operation<br>10 : Transparent Asynchronous UART operation<br>11 : Not used                                                                                                                                                                                                                   |
| MODEM0[1:0] | XOSC_FREQ[1:0]   | 00            | -      | Selection of XTAL frequency range<br>00 : 3MHz – 4MHz crystal, 3.6864MHz recommended<br>Also used for 76.8 kBaud, 14.7456MHz<br>01 : 6MHz – 8MHz crystal, 7.3728MHz recommended<br>Also used for 38.4 kBaud, 14.7456MHz<br>10 : 9MHz – 12MHz crystal, 11.0592 MHz recommended<br>11 : 12MHz – 16MHz crystal, 14.7456MHz recommended |

**MATCH Register (12h)**

| REGISTER   | NAME          | Default value | Active | Description                                                                                                                                        |
|------------|---------------|---------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| MATCH[7:4] | RX_MATCH[3:0] | 0000          | -      | Selects matching capacitor array value for RX, step size is 0.4 pF<br>0001: Use for RF frequency > 500 MHz<br>0111: Use for RF frequency < 500 MHz |
| MATCH[3:0] | TX_MATCH[3:0] | 0000          | -      | Selects matching capacitor array value for TX, step size is 0.4 pF                                                                                 |

**FSCTRL Register (13h)**

| REGISTER    | NAME       | Default value | Active | Description                             |
|-------------|------------|---------------|--------|-----------------------------------------|
| FSCTRL[7:4] | -          | -             | -      | Not used                                |
| FSCTRL[3:1] |            |               |        | Reserved                                |
| FSCTRL[0]   | FS_RESET_N | 1             | L      | Separate reset of frequency synthesizer |

PRESCALER Register (1Ch)

| REGISTER       | NAME              | Default value | Active | Description                                                                                                                                                            |
|----------------|-------------------|---------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PRESCALER[7:6] | PRE_SWING[1:0]    | 00            | -      | Prescaler swing. Fractions for PRE_CURRENT[1:0] = 00<br><br>00 : 1 * Nominal Swing<br>01 : 2/3 * Nominal Swing<br>10 : 7/3 * Nominal Swing<br>11 : 5/3 * Nominal Swing |
| PRESCALER[5:4] | PRE_CURRENT [1:0] | 00            | -      | Prescaler current scaling<br><br>00 : 1 * Nominal Current<br>01 : 2/3 * Nominal Current<br>10 : 1/2 * Nominal Current<br>11 : 2/5 * Nominal Current                    |
| PRESCALER[3]   | IF_INPUT          | 0             | -      | 0 : Nominal setting<br>1 : RSSI/IF pin is input to IF-strips                                                                                                           |
| PRESCALER[2]   | IF_FRONT          | 0             | -      | 0 : Nominal setting<br>1 : Output of IF_Front_amp is switched to RSSI/IF pin                                                                                           |
| PRESCALER[1:0] | -                 | 00            | -      | Not used                                                                                                                                                               |

TEST6 Register (for test only, 40h)

| REGISTER   | NAME           | Default value | Active | Description                                                  |
|------------|----------------|---------------|--------|--------------------------------------------------------------|
| TEST6[7]   | LOOPFILTER_TP1 | 0             | -      | 1 : Select testpoint 1 to CHP_OUT<br>0 : CHP_OUT tied to GND |
| TEST6 [6]  | LOOPFILTER_TP2 | 0             | -      | 1 : Select testpoint 2 to CHP_OUT<br>0 : CHP_OUT tied to GND |
| TEST6 [5]  | CHP_OVERRIDE   | 0             | -      | 1 : use CHP_CO[4:0] value<br>0 : use calibrated value        |
| TEST6[4:0] | CHP_CO[4:0]    | 10000         | -      | Charge_Pump Current DAC override value                       |

TEST5 Register (for test only, 41h)

| REGISTER   | NAME         | Default value | Active | Description                                                 |
|------------|--------------|---------------|--------|-------------------------------------------------------------|
| TEST5[7:6] | -            | -             | -      | Not used                                                    |
| TEST5[5]   | CHP_DISABLE  | 0             | -      | 1 : CHP up and down pulses disabled<br>0 : normal operation |
| TEST5[4]   | VCO_OVERRIDE | 0             | -      | 1 : use VCO_AO[2:0] value<br>0 : use calibrated value       |
| TEST5[3:0] | VCO_AO[3:0]  | 1000          | -      | VCO_ARRAY override value                                    |

TEST4 Register (for test only, 42h)

| REGISTER   | NAME       | Default value | Active | Description                                                                                                           |
|------------|------------|---------------|--------|-----------------------------------------------------------------------------------------------------------------------|
| TEST4[7:6] | -          | -             | -      | Not used                                                                                                              |
| TEST4[5:0] | L2KIO[5:0] | 100101        | h      | Constant setting charge pump current scaling/rounding factor. Sets Bandwidth of PLL. Use 3Fh for 9.6 kBaud and higher |

TEST3 Register (for test only, 43h)

| REGISTER   | NAME         | Default value | Active | Description                                               |
|------------|--------------|---------------|--------|-----------------------------------------------------------|
| TEST3[7:5] | -            | -             | -      | Not used                                                  |
| TEST3[4]   | BREAK_LOOP   | 0             | -      | 1 : PLL loop open<br>0 : PLL loop closed                  |
| TEST3[3:0] | CAL_DAC_OPEN | 0100          | -      | Calibration DAC override value, active when BREAK_LOOP =1 |

TEST2 Register (for test only, 44h)

| REGISTER   | NAME              | Default value | Active | Description                                      |
|------------|-------------------|---------------|--------|--------------------------------------------------|
| TEST2[7:5] | -                 | -             | -      | Not used                                         |
| TEST2[4:0] | CHP_CURRENT [4:0] | -             | -      | Status vector defining applied CHP_CURRENT value |


TEST1 Register (for test only, 45h)

| REGISTER   | NAME         | Default value | Active | Description                                          |
|------------|--------------|---------------|--------|------------------------------------------------------|
| TEST1[7:4] | -            | -             | -      | Not used                                             |
| TEST1[3:0] | CAL_DAC[3:0] | -             | -      | Status vector defining applied Calibration DAC value |

TEST0 Register (for test only, 46h)

| REGISTER   | NAME           | Default value | Active | Description                                    |
|------------|----------------|---------------|--------|------------------------------------------------|
| TEST0[7:4] | -              | -             | -      | Not used                                       |
| TEST0[3:0] | VCO_ARRAY[3:0] | -             | -      | Status vector defining applied VCO_ARRAY value |

### 30. Package Description (TSSOP-28)

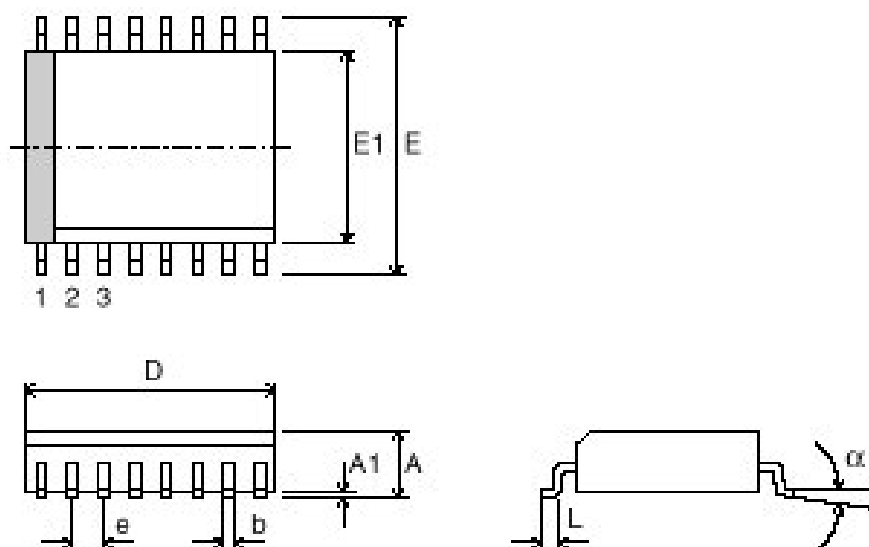


Note: The figure is an illustration only.

| Thin Shrink Small Outline Package (TSSOP) |     |      |      |      |      |      |      |      |      |       |          |
|-------------------------------------------|-----|------|------|------|------|------|------|------|------|-------|----------|
|                                           |     | D    | E1   | E    | A    | A1   | e    | B    | L    | Copl. | $\alpha$ |
| TSSOP 28                                  | Min | 9.60 | 4.30 | 6.40 | 1.20 | 0.05 | 0.65 | 0.19 | 0.45 | 0.10  | 0°       |
|                                           | Max | 9.80 | 4.50 |      |      |      |      |      |      |       |          |
| All dimensions in mm                      |     |      |      |      |      |      |      |      |      |       |          |


### 31. Package Description (UltraCSP™)

Top view

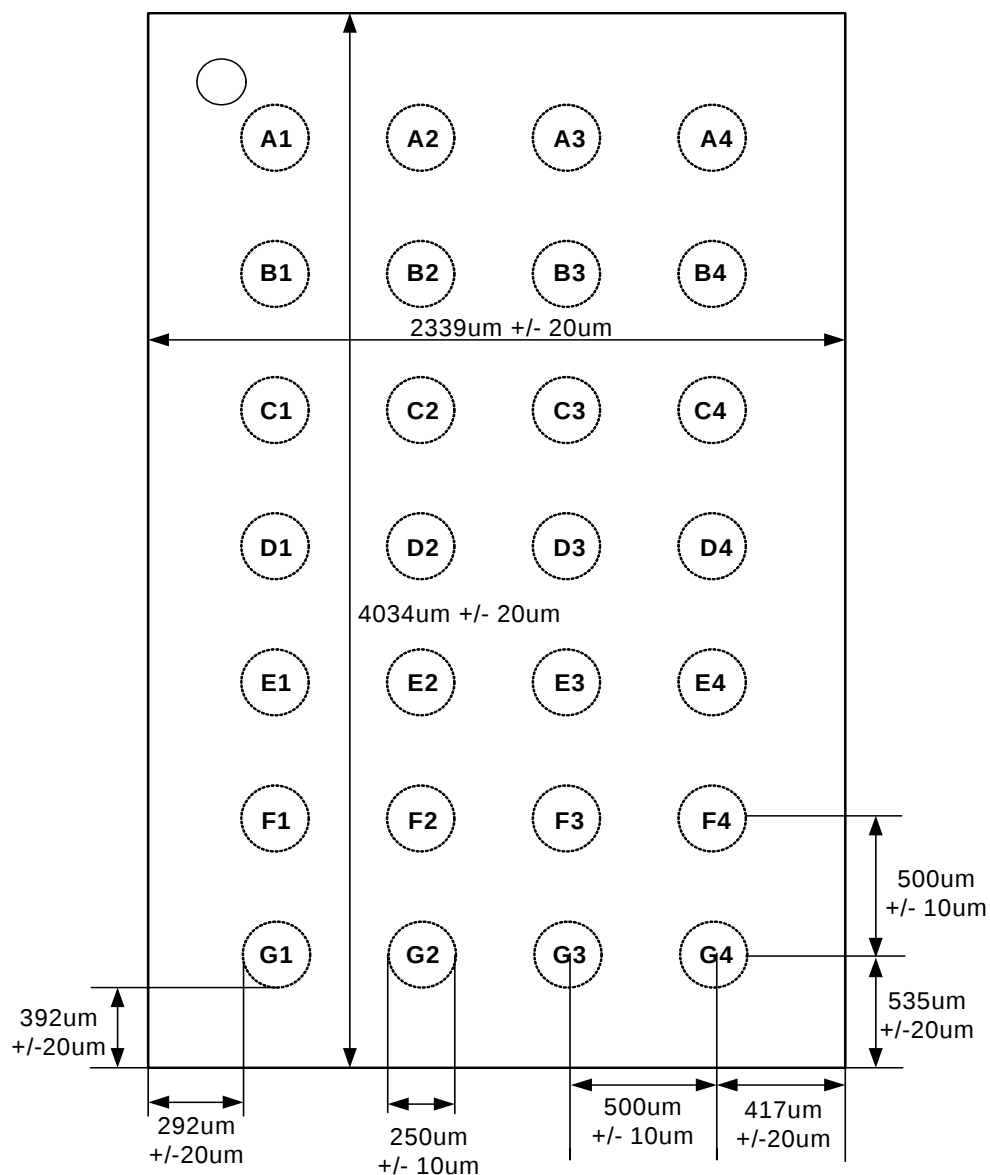

Bump pitch is  $500\mu\text{m}$  centre to centre in both directions.

Vertical cross section (UltraCSP™)

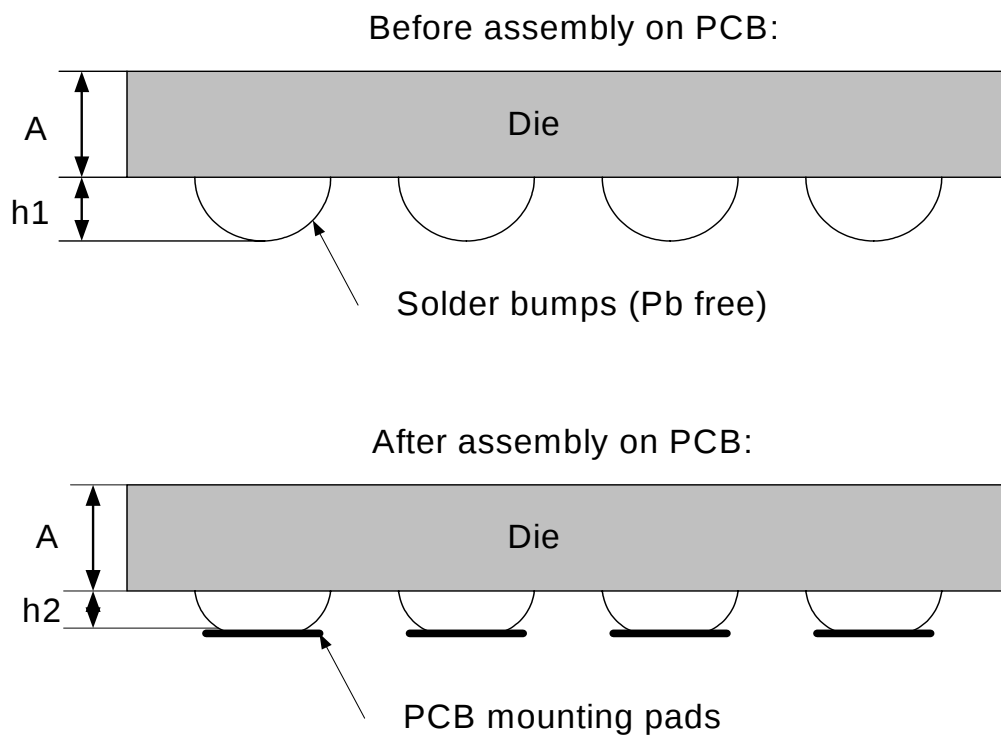

| Die thickness<br>(A) | Bump height<br>before<br>assembly (h1) | Bump height<br>after assembly<br>(h2) | Total height<br>before<br>assembly | Total<br>height after<br>assembly |
|----------------------|----------------------------------------|---------------------------------------|------------------------------------|-----------------------------------|
| 432um                | 200um<br>+/- 20um                      | 140um<br>+/- tbd um                   | 632um<br>+/- 20um                  | 572um<br>+/- tbd um               |

**Table 14: Height budget**

### 32. Plastic Tube Specification

TSSOP 4.4mm (.173") antistatic tube.

| Tube Specification |            |             |             |                |
|--------------------|------------|-------------|-------------|----------------|
| Package            | Tube Width | Tube Height | Tube Length | Units per Tube |
| TSSOP 28           | 268 mil    | 80 mil      | 20"         | 50             |


### 33. Waffle Pack Specification

| Waffle Pack Specification |                   |                    |                    |                       |
|---------------------------|-------------------|--------------------|--------------------|-----------------------|
| Package                   | Waffle Pack Width | Waffle Pack Length | Waffle Pack Length | Units per Waffle Pack |
| UltraCSP™                 | 50.8 mm           | 50.8 mm            | 3.96 mm            | 117                   |

### 34. Carrier Tape and Reel Specification

Carrier tape and reel is in accordance with EIA Specification 481.

| Tape and Reel Specification |            |                 |            |               |                |
|-----------------------------|------------|-----------------|------------|---------------|----------------|
| Package                     | Tape Width | Component Pitch | Hole Pitch | Reel Diameter | Units per Reel |
| TSSOP 28                    | 16 mm      | 8 mm            | 4 mm       | 13"           | 2500           |
| UltraCSP™                   | 12 mm      | 8 mm            | 4 mm       | 4 mm          | 2500           |

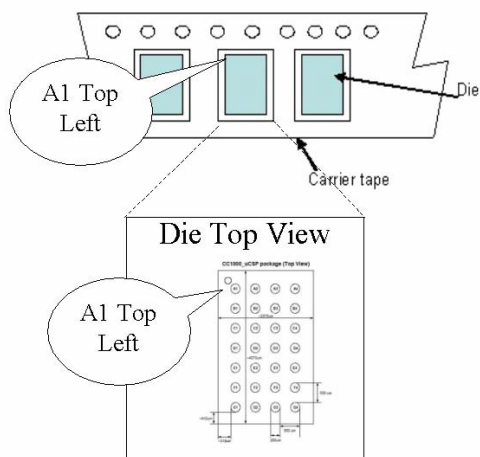

**Note:** UltraCSP™ Tape and reel illustration only

## 35. Ordering Information

| Chipcon Part Number* | TI Part Number   | Description                                                                                                          | Minimum Order Quantity (MOQ)                      |
|----------------------|------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| CC1000-RTB1          | CC1000PW         | Single Chip RF Transceiver. CC1000, TSSOP 28 package, RoHS compliant Pb-free assembly in tubes with 50 pcs per tube. | 250 (5 tubes of 50 units per tube)                |
| CC1000-RTR1          | CC1000PWR        | Single Chip RF Transceiver. CC1000, TSSOP 28 package, RoHS compliant Pb-free assembly, T&R with 2500 pcs per reel.   | 2500 (tape and reel)                              |
| CC1000-RWP2          | CC1000YZ         | Single Chip RF Transceiver. CC1000, UltraCSP™ package, RoHS compliant Pb-free assembly with 117 pcs per waffle pack. | 585 (5 waffle packs with 117 pcs per waffle pack) |
| CC1000-RTR2          | CC1000YZR        | Single Chip RF Transceiver. CC1000, UltraCSP™ package, RoHS compliant Pb-free assembly, T&R with 2500 pcs per reel.  | 2500 (tape and reel)                              |
| CC1000DK-433         | CC1000DK-433     | CC1000 Development Kit, 433 MHz                                                                                      | 1                                                 |
| CC1000DK-868-915     | CC1000DK-868-915 | CC1000 Development Kit, 868/915 MHz                                                                                  | 1                                                 |
| CC1000PPK-433        | CC1000PPK-433    | CC1000 Plug & Play Kit, 433 MHz                                                                                      | 1                                                 |
| CC1000PPK-868        | CC1000PPK-868    | CC1000 Plug & Play Kit, 868/915 MHz                                                                                  | 1                                                 |

\* Chipcon part numbers are obsolete, but included for reference. Use the TI part numbers when ordering parts.

## 36. General Information

### 36.1 Document Revision History

| Revision      | Date         | Description/Changes                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SWRS048A      | January 2007 | Reflow soldering temperature according to IPC/JEDEC J-STD-020C.<br>Max reflow temperature for CC1000 UltraCSP™ updated to 255 °C.<br>Added waffle pack specification.<br>Updated ordering information with TI part numbers.<br>Updated address information.<br>Updated header and footer.<br>Updated Important Notice.<br>Removed Chipcon specific Disclaimer, Trademarks and Life Support Policy sections.                  |
| SWRS048 (2.3) | August 2005  | UltraCSP™ package included<br>Minor corrections and editorial changes                                                                                                                                                                                                                                                                                                                                                        |
| 2.2           | April 2004   | Shaping feature removed<br>Application circuit simplified<br>Additional information added for the demodulator<br>Additional information added for frequency calculation<br>Additional information added for calibration<br>Additional information added for crystal oscillator<br>Preliminary version removed<br>Narrow band information removed<br>REFDIV different in RX and TX<br>Minor corrections and editorial changes |

### 36.2 Product Status Definitions

| Data Sheet Identification | Product Status                           | Definition                                                                                                                                                                                                                                  |
|---------------------------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information       | Planned or Under Development             | This data sheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                                                         |
| Preliminary               | Engineering Samples and First Production | This data sheet contains preliminary data, and supplementary data will be published at a later date. Chipcon reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |
| No Identification Noted   | Full Production                          | This data sheet contains the final specifications. Chipcon reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.                                                   |

| Data Sheet Identification | Product Status    | Definition                                                                                                                                            |
|---------------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Obsolete                  | Not In Production | This data sheet contains specifications on a product that has been discontinued by Chipcon. The data sheet is printed for reference information only. |

### 37. Address Information

Texas Instruments Norway AS  
 Gaustadalléen 21  
 N-0349 Oslo  
 NORWAY  
 Tel: +47 22 95 85 44  
 Fax: +47 22 95 85 46  
 Web site: <http://www.ti.com/lpw>

### 38. TI Worldwide Technical Support

#### Internet

TI Semiconductor Product Information Center Home Page: [support.ti.com](http://support.ti.com)  
 TI Semiconductor KnowledgeBase Home Page: [support.ti.com/sc/knowledgebase](http://support.ti.com/sc/knowledgebase)

### 39. Product Information Centers

#### Americas

**Phone:** +1(972) 644-5580  
**Fax:** +1(972) 927-6377  
**Internet/Email:** [support.ti.com/sc/pic/americas.htm](http://support.ti.com/sc/pic/americas.htm)

#### Europe, Middle East and Africa

**Phone:**  
 Belgium (English) +32 (0) 27 45 54 32  
 Finland (English) +358 (0) 9 25173948  
 France +33 (0) 1 30 70 11 64  
 Germany +49 (0) 8161 80 33 11  
 Israel (English) 180 949 0107  
 Italy 800 79 11 37  
 Netherlands (English) +31 (0) 546 87 95 45  
 Russia +7 (0) 95 363 4824  
 Spain +34 902 35 40 28  
 Sweden (English) +46 (0) 8587 555 22  
 United Kingdom +44 (0) 1604 66 33 99  
**Fax:** +49 (0) 8161 80 2045  
**Internet:** [support.ti.com/sc/pic/euro.htm](http://support.ti.com/sc/pic/euro.htm)

#### Japan

|                       |               |                                                                                      |
|-----------------------|---------------|--------------------------------------------------------------------------------------|
| <b>Fax</b>            | International | +81-3-3344-5317                                                                      |
|                       | Domestic      | 0120-81-0036                                                                         |
| <b>Internet/Email</b> | International | <a href="http://support.ti.com/sc/pic/japan.htm">support.ti.com/sc/pic/japan.htm</a> |
|                       | Domestic      | <a href="http://www.tij.co.jp/pic">www.tij.co.jp/pic</a>                             |

**Asia**

**Phone**

|               |                         |
|---------------|-------------------------|
| International | +886-2-23786800         |
| Domestic      | <u>Toll-Free Number</u> |
| Australia     | 1-800-999-084           |
| China         | 800-820-8682            |
| Hong Kong     | 800-96-5941             |
| India         | +91-80-51381665 (Toll)  |
| Indonesia     | 001-803-8861-1006       |
| Korea         | 080-551-2804            |
| Malaysia      | 1-800-80-3973           |
| New Zealand   | 0800-446-934            |
| Philippines   | 1-800-765-7404          |
| Singapore     | 800-886-1028            |
| Taiwan        | 0800-006800             |
| Thailand      | 001-800-886-0010        |

**Fax**

+886-2-2378-6808

**Email**


[tiasia@ti.com](mailto:tiasia@ti.com) or [ti-china@ti.com](mailto:ti-china@ti.com)

**Internet**

[support.ti.com/sc/pic/asia.htm](http://support.ti.com/sc/pic/asia.htm)

Copyright © 2007, Texas Instruments Incorporated


**TAPE AND REEL INFORMATION**

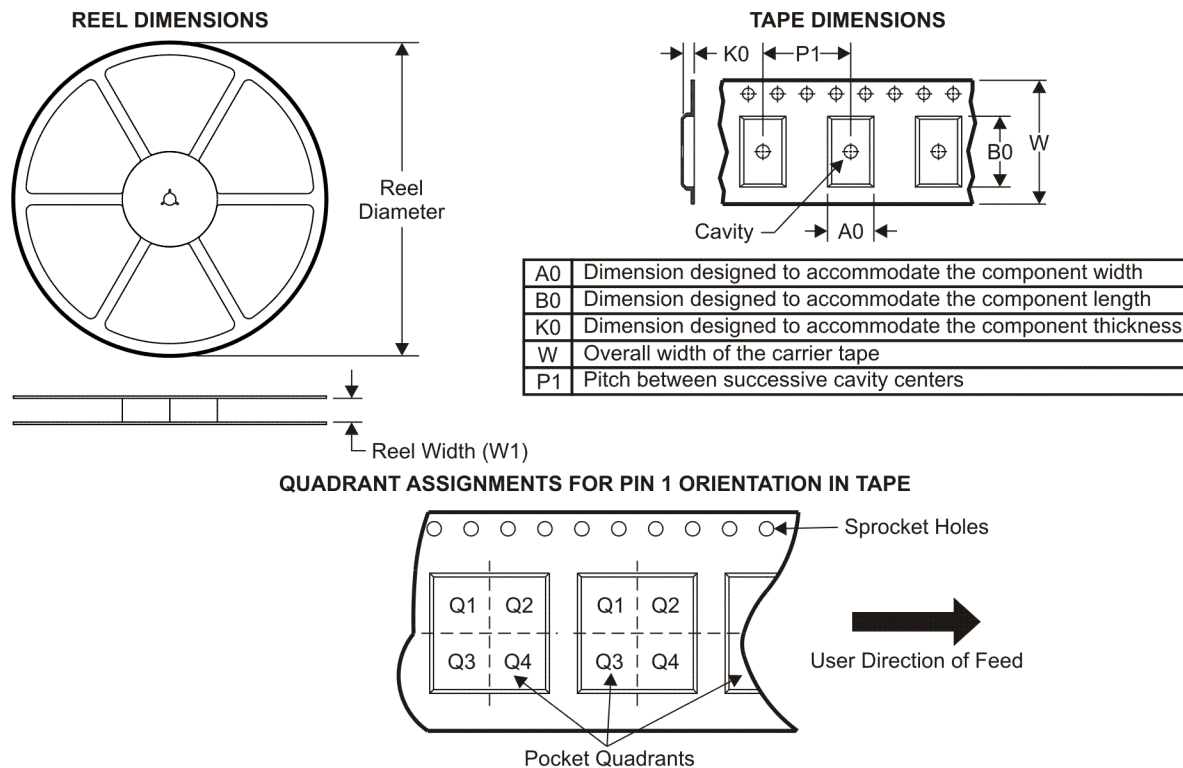

\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| CC1000PWR | TSSOP        | PW              | 28   | 2500 | 330.0              | 16.4               | 6.8     | 10.2    | 1.6     | 8.0     | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

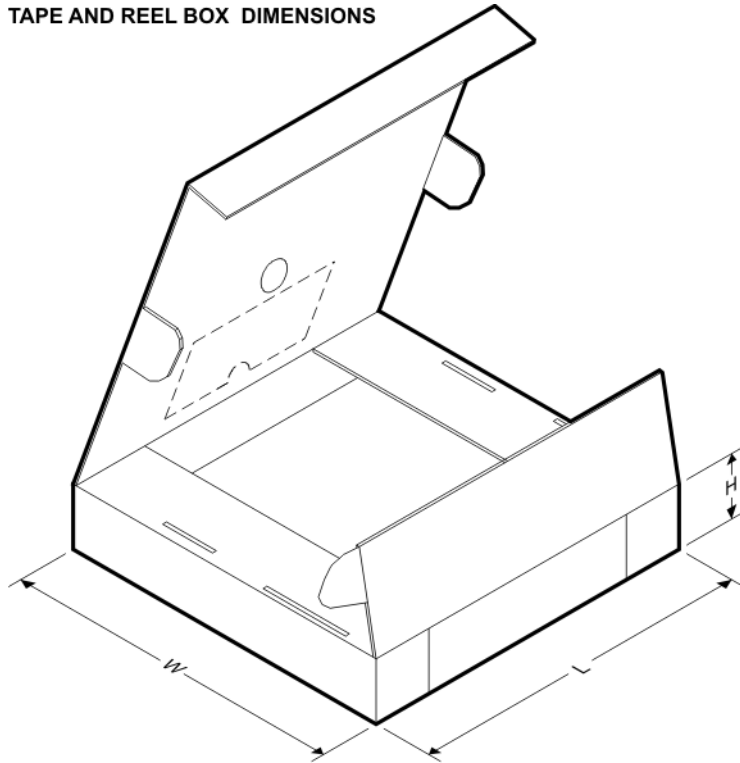

\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------|--------------|-----------------|------|------|-------------|------------|-------------|
| CC1000PWR | TSSOP        | PW              | 28   | 2500 | 378.0       | 70.0       | 346.0       |

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                             |                                                                    |
|-----------------------------|--------------------------------------------------------------------|
| Amplifiers                  | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters             | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DLP® Products               | <a href="http://www.dlp.com">www.dlp.com</a>                       |
| DSP                         | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Clocks and Timers           | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>           |
| Interface                   | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic                       | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt                  | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers            | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| RFID                        | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               |
| RF/IF and ZigBee® Solutions | <a href="http://www.ti.com/lprf">www.ti.com/lprf</a>               |

### Applications

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Audio              | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Automotive         | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| Broadband          | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Digital Control    | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Medical            | <a href="http://www.ti.com/medical">www.ti.com/medical</a>               |
| Military           | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Optical Networking | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Security           | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Telephony          | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
| Video & Imaging    | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
| Wireless           | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2009, Texas Instruments Incorporated

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com