



Features

- 3" x 5" x 1.3" Package
- 200W with 100LFM Air
- 180W Convection Cooled
- Class B Conducted EMI
- Fits 1U Applications
- Universal Input 90-264 Vac
- Approved to CSA/EN/IEC/UL60950-1, 2nd Edition
- Efficiency 90% typical
- 3 Year Warranty
- RoHS Compliant



Description

A power-packed, highly efficient AC to DC power supply designed for industrial and ITE applications. These models provide 180 Watts convection cooled, 200 Watts with moving air. The small heat footprint allows simple thermal design of systems which use this product. All models are CE marked to low voltage directive and approved to ITE standards of EN60950-1, 2nd edition.

Model Selection

| Model Number | Volts | Output Current | | Minimum Load | Ripple & Noise** | Total Regulation | OVP Threshold*** |
|------------------|-------|----------------|-------------|--------------|------------------|------------------|------------------|
| | | w/100LFM air | Convection* | | | | |
| CINT1200A1275K01 | 12V | 16.7A | 15.0A | 0A | 120mV pk-pk | ±3% | 14.0 ± 1.1V |
| CINT1200A1575K01 | 15V | 13.3A | 12.0A | 0A | 150mV pk-pk | ±3% | 18.5 ± 1.2V |
| CINT1200A1875K01 | 18V | 11.1A | 10.0A | 0A | 180mV pk-pk | ±3% | 21.5 ± 2.0V |
| CINT1200A2475K01 | 24V | 8.33A | 7.50A | 0A | 240mV pk-pk | ±3% | 29.0 ± 2.5V |
| CINT1200A2875K01 | 28V | 7.14A | 6.40A | 0A | 280mV pk-pk | ±3% | 33.5 ± 2.5V |
| CINT1200A3275K01 | 32V | 6.25A | 5.62A | 0A | 320mV pk-pk | ±3% | 36.0 ± 3.0V |
| CINT1200A3675K01 | 36V | 5.55A | 5.00A | 0A | 360mV pk-pk | ±3% | 41.0 ± 3.0V |
| CINT1200A4875K01 | 48V | 4.17A | 3.75A | 0A | 480mV pk-pk | ±3% | 56.0 ± 3.0V |

Notes: * Total convection power is 180 Watts.

** Measured with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR capacitors.

General Specifications


| | | | |
|----------------------|---|---------------------|-------------------------------------|
| AC Input | 100-240Vac, ±10%, 47-63Hz, 1Ø 120-370Vdc | Turn On Time | Less than 3 sec. @115Vac, Full Load |
| Input Current | 115Vac: 1.8A, 230Vac: 0.9A | Hold-up Time | 16mS at 200W, 120Vac/60Hz |

Specifications (continued)

| | | | |
|------------------------------|--|-----------------------------------|--|
| Inrush Current | 264Vac, cold start: will not exceed 55A | Overtemperature Protection | Sensing transformer temperature, 165°C at full load, latching type, requires input power recycling to reset. |
| Input Fuses | F1, F2: 3.15A, 250Vac fuses provided on all models | Overload Protection | 120 to 150% of rating, Hiccup Mode |
| Earth Leakage Current | <500µA@264Vac, 60Hz, NC; <1mA SFC | Short Circuit Protection | Hiccup Mode, auto recovery. |
| Efficiency | 88% typical | Overvoltage Protection | OVP latch, see models chart for trip range. |
| Output Power | 200W continuous, with 100 lfm airflow, 180W convection cooled – See chart for specific voltage model ratings. | Switching Frequency | PFC: Fixed, 65kHz Main Converter: Variable 35-200kHz, 65-70kHz at full load. |
| Transient Response | 500µS typical, return to 0.5% of nominal, 50% load step. $\Delta i/\Delta t$: <0.2A/µS. Max Voltage Deviation = 3% | Isolation | Input-Output: 4000Vac Input-Ground: 1800Vac Output-Ground: 1500Vac |
| Ripple and Noise | 0.5%rms, 1% pk-pk, see chart. | Operating Temperature | -10°C to +70°C Start Up at -40°C, full load |
| Output Voltage | See chart | Temperature Derating | Derate output power linearly above 50°C to 50% at 70°C |
| Voltage Adjustability | Fixed Output | Storage Temperature | -40°C to +85°C |
| Minimum Load | Not required | Altitude | Operating: -500 to 10,000 ft. Non-operating: -500 to 40,000 ft. |
| Total Regulation | +/- 3% combined line, load and initial setting. | Relative Humidity | 5% to 95%, non-condensing |
| Vibration | Operating: 0.003g ² /Hz, 1.5grms overall, 3 axes, 10 min/axis Non-Operating: 0.026g ² /Hz, 5.0grms overall, 3 axes, 1 hr/axis | Shock | Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10 ms, 3 axes, 6 shocks total |
| Dimensions | W: 3.0" x L: 5.0" x H: 1.3" | Safety Standards | EN/CSA/UL/IEC 60950-1, 2nd Edition |
| Weight | 325g | MTBF | 401,000 hours, 25°C, 110Vac |

Output vs. Temperature Derating Curve


180W convection cooled and 200W continuous with 100 LFM airflow, derate output power to 50% at 70°C.

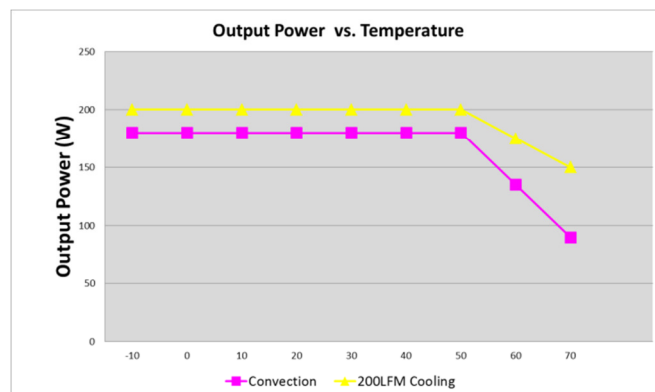

EMI/EMC Compliance

| | |
|--|---|
| Conducted Emissions | EN55011/22 Class B, FCC Part 15, Subpart B, Class B |
| Radiated Emissions | EN55011/22 Class A, FCC Part 15, Subpart B, Class A w/6db margin |
| Static Discharge Immunity | EN61000-4-2, 6kV Contact Discharge, 8kV air discharge |
| Radiated RF Immunity | EN61000-4-3, 3V/m. |
| EFT/Burst Immunity | EN61000-4-4, 2kV/5kHz |
| Line Surge Immunity | EN61000-4-5, 1kV differential, 2kV common-mode |
| Conducted RF Immunity | EN61000-4-6, 3Vrms |
| Power Frequency Magnetic Field Immunity | EN61000-4-8, 3A/m |
| Voltage Dip Immunity | EN61000-4-11, 100%, 10ms; 30%, 275ms; 60%, 100ms; Performance Criteria A, A, & A at 70% load. |
| Line Harmonic Emissions | EN61000-3-2, Class A, B, C, & D |
| Flicker Test | EN61000-3-3, Complies (dmax<6%) |

Mechanical Drawing

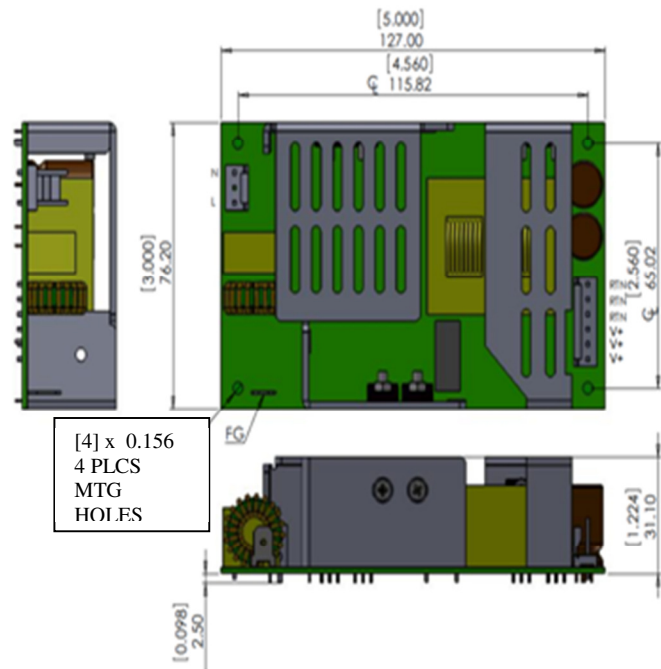

- Notes:**
1. All dimensions in inches (mm), tolerance is +/-0.000".
 2. Mounting holes should be grounded for EMI purposes.
 3. FG is safety ground connection.
 4. The power supply requires mounting on metal standoffs 0.20" (5mm) in height, min.

Connector Information

| Input Connector J100 | Ground (FG) | DC Output Connector J300 | |
|---|--------------------------------------|---|--|
| PIN 1) AC LINE PIN 2) EMPTY PIN 3) AC NEUTRAL | 0.25" FASTON TAB | Term. 1,2,3: RTN Term. 4,5,6: +Vout | |
| Mating Connector: AMP Molex 640250-3 Pins: 640252-2 | Mating Connector: Molex 190020001 | Mating Connector: AMP 640250-6 Pins: 640252-2 | |

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com