

7334L2622F05LF

Catalogue Part Number Key

Lead Free Version (Optional)

Durability

0: 2500 Mating Cycles

2: 10000 Mating Cycles

5: 100000 Mating Cycles

Number of contacts :

2: 8 contacts ISO

3: 16 contacts ISO + AFNOR

GENERAL:

This L26 connector uses a "sliding" contact technology suitable for most applications.
It has been designed for easy mounting on the PCB.

ELECTRICAL PROPERTIES:

Insulation resistance : 5000 M Ω min
Dielectric withstanding : 750 Vrms min
Current carrying capacity : 10 μ A min. 1A max
Contact resistance : 100m Ω max
Card sensor type : Normally closed

MECHANICAL PROPERTIES:

Contact Normal force : 0.6 N max (EMV Standard)
Insertion force : 10 N max
Extraction force : 1 N min

MATERIAL:


Housing : Thermoplastic, Colour Black, Rated UL94V0
Contacts and switch : Copper Alloy
Plating : Gold over Nickel on contact area
Matte Tin over Nickel on solder tails
Bare edge allowed

ENVIRONMENT:




Operating temperature: -20°C / +70°C
Storage temperature: -40°C / +85°C
Printed Circuit Board thickness : 1.6mm

REFERENCE DOCUMENTS:

Product specification VGN 11596
Packaging Specification VGN 11619

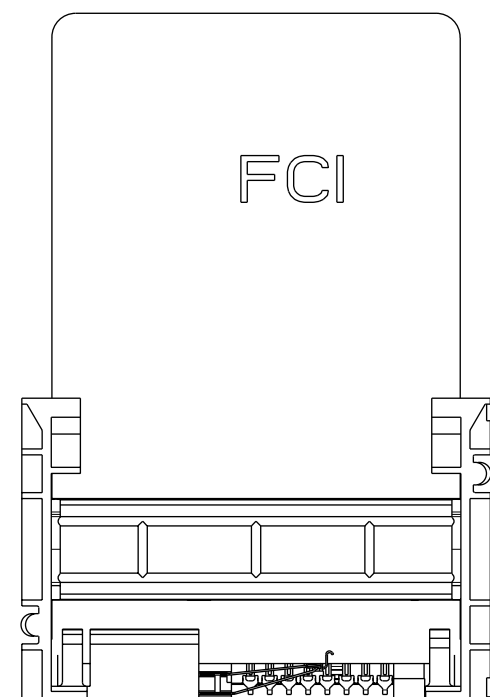

SCALE 1:1

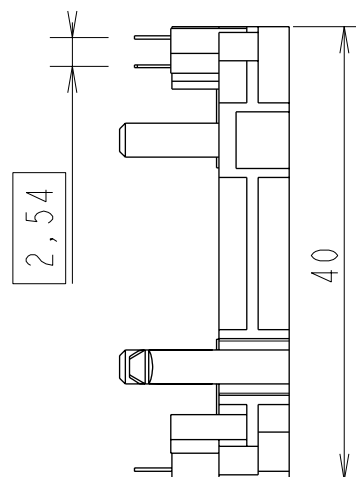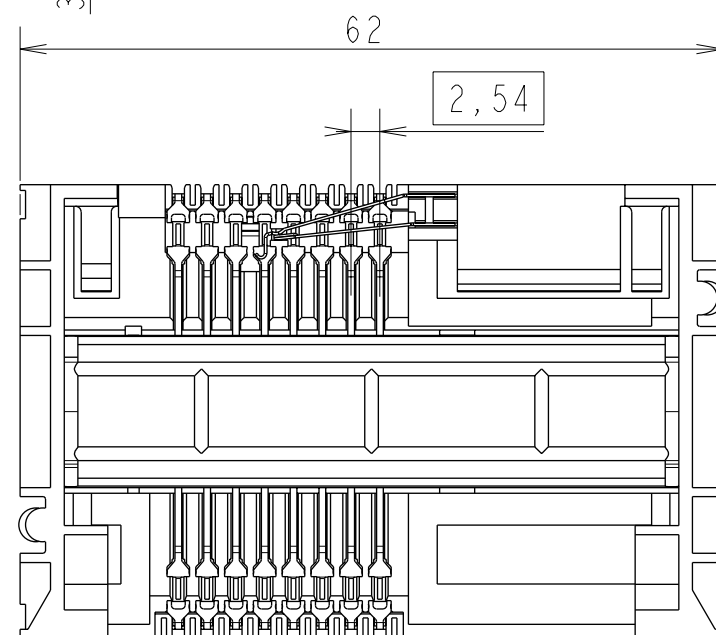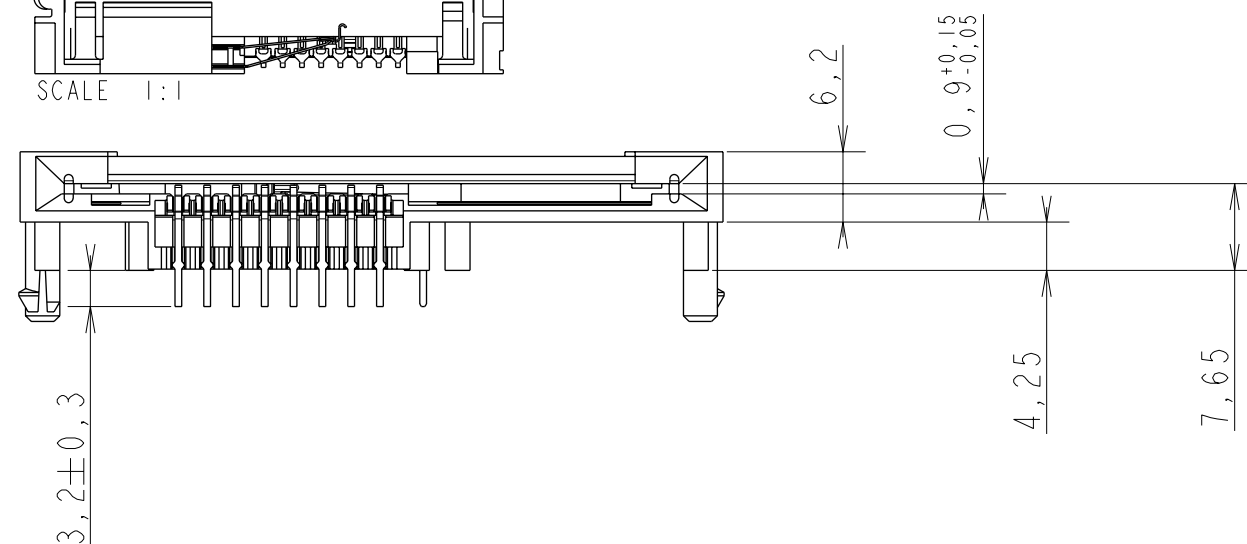


LEAD FREE VERSION:

"This product meets European Union Directives and other country regulations as described in GS-22-008"


The housing will withstand exposure to 260°C peak temperature for 10seconds in a wave solder application with a 1.6mm minimum thick circuit board.
Use protective adhesive tape (Kapton orTeflon) or protective metallic devices on the areas which are directly exposed to wave soldering as it is used in classical leaded wave soldering

General Tolerances: ± 0.2 mm


l tr	ecn no	dr	date
A	F20307	DLE	2002/04/30
B	LS 3053	JTA	2003/05/13
C	105-0071	DTK	2005/06/25
D	106-0084	SSC	2006/06/21
E	106-0189	SSC	2006/10/17
F	109-0057	SSC	2009/04/15
-	-	-	-

www.fciconnect.com			surface  ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	N. TWINCY	2002/04/30	ANGULAR	LINEAR	0.X	±	size A3	Scale 3:2			
Eng	F TISSERAND	2002/04/30			0.XX	±					
Chr	RAMESH.P.K	2009/04/15			0° ±°	0.XXX			±		
Appr	S.S.CHERIAN	2009/04/15	Product family SMART CARDS				Spec ref		SEE NOTES		
			L26 TYPE F05				dwg no VJW_54705			Rev F	
			catalog no SEE TABLE				-			sheet 1 of 2	

RECOMMENDED PCB LAYOUT CONTACT CONFIGURATION : ISO & AFNOR
(CONNECTOR SIDE)


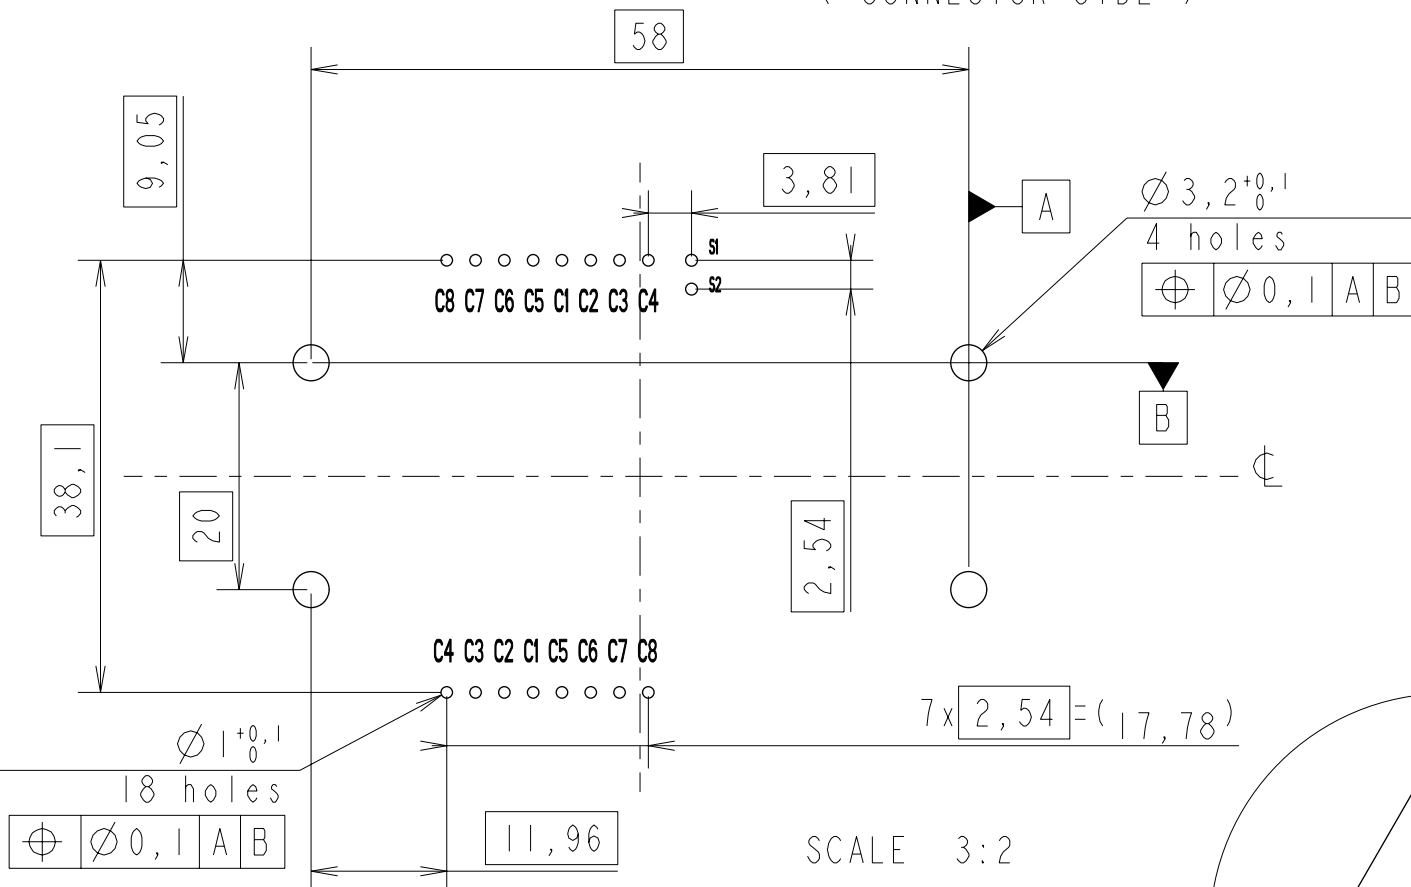


STANDARD LAYOUT FOR 'KEEP OUT ZONE' (Connector Side)

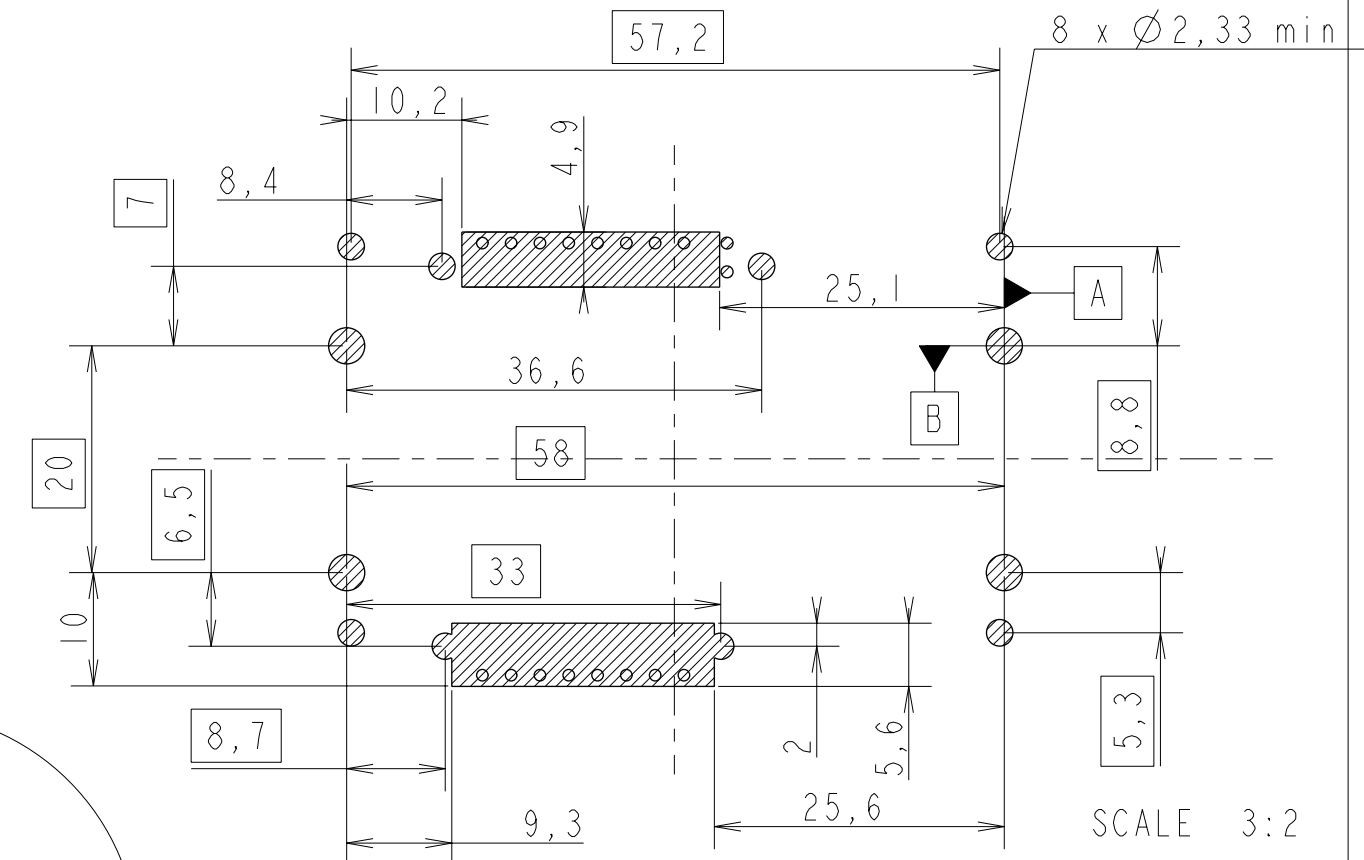

Hatching area might be free of components
Maximum free space outside of these zones = 4.25 mm

RECOMMENDED PCB LAYOUT CONTACT CONFIGURATION : ISO
(CONNECTOR SIDE)

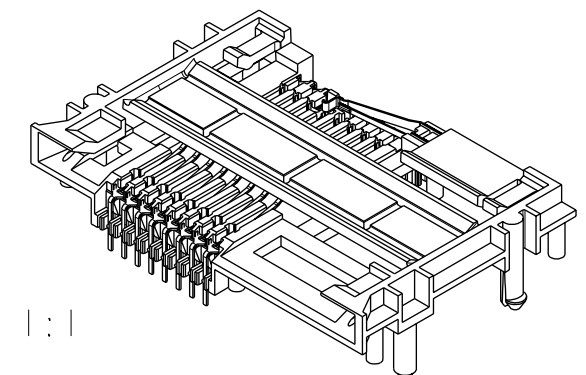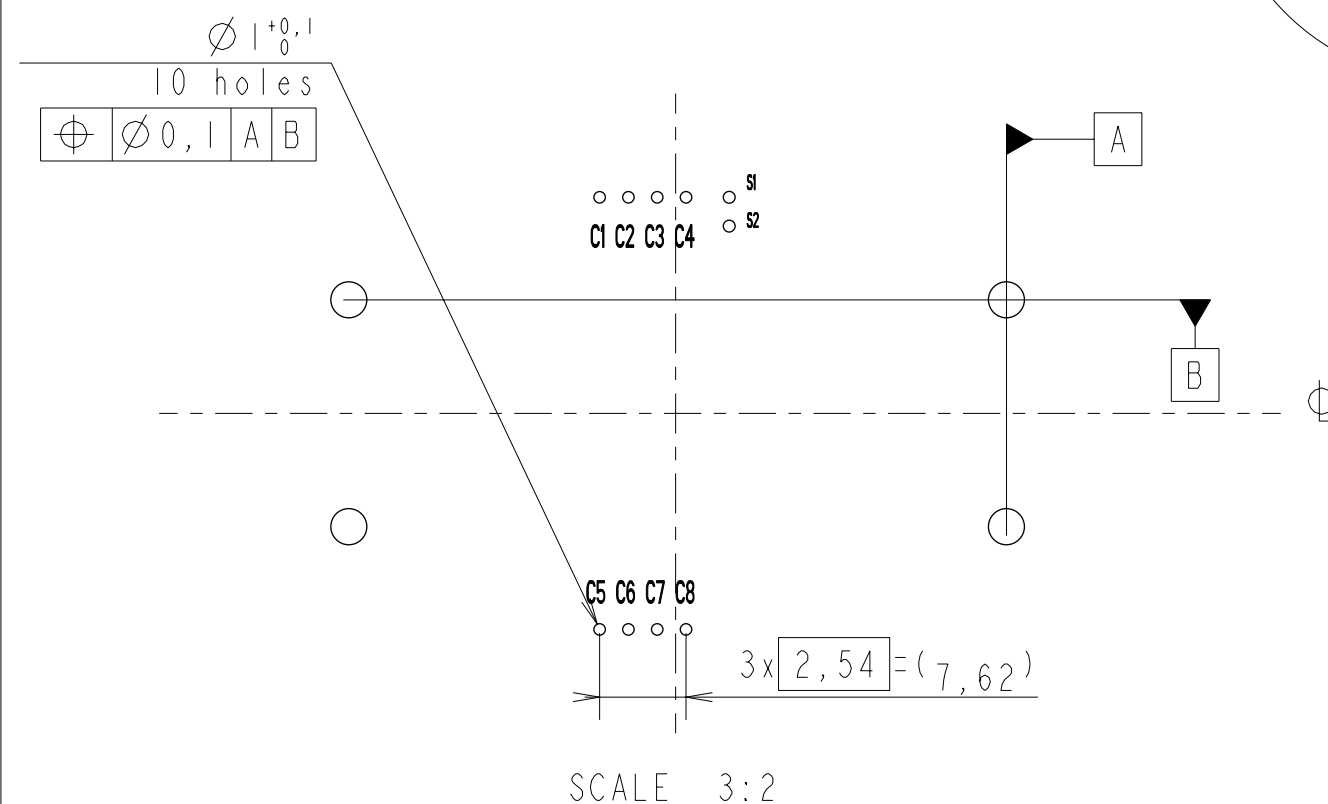

ECHELLE 1 : 1

EUROPEAN PROJECTION

www.fciconnect.com			surface -  ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	N.TWINCY	2002/04/30	ANGULAR		LINEAR		0.X	±	size A3	Scale 3:2	
Eng	F TISSERAND	2002/04/30					0.XX	±			
Chr	RAMESH.P.K	2009/04/15	0°	±°			0.XXX	±	ECN	109-0057	
Appr	S.S.CHERIAN	2009/04/15	Product family					SMART CARDS	Spec ref	SEE NOTES	
			title					dwg no			Rev. F
			L26 TYPE F05 --					VJW_54705			
			catalog no					SEE TABLE		-	sheet 2 of 2

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com