



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK

HMC182S14 / 182S14E

GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 2 GHz

Typical Applications

The HMC182S14 / HMC182S14E is ideal for:

- 800 - 1000 MHz Basestation


Features

Low Insertion Loss: 0.8dB

Integrated 2:4 Decoder

14 Lead SOIC Package

Functional Diagram

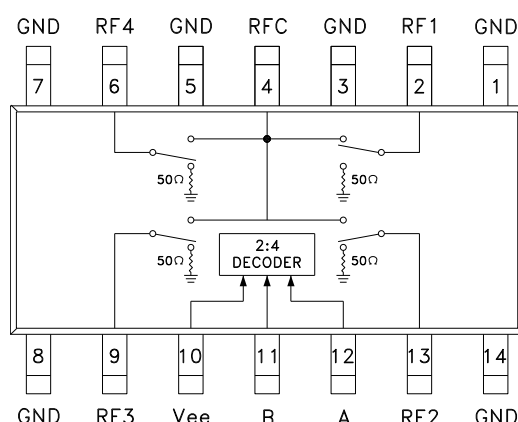

General Description

The HMC182S14 & HMC182S14E are low-cost terminated SP4T switches in 14-lead SOIC packages for use in antenna diversity, switched filter banks, gain/attenuation selection, and general channel multiplexing applications. The switch can control signals up to 2 GHz. A 2:4 decoder is integrated on the switch, requiring only 2 control lines and a negative bias to select each RF path. The 2:4 decoder replaces 4 to 8 control lines normally required by GaAs SP4T switches. The HMC182S14(E) are drop-in replacements for the HMC165S14 in applications requiring low "off state" VSWR. See positive bias / TTL SP4T HMC241QS16.

Electrical Specifications,

$T_A = +25^\circ \text{C}$, For 0/-5V Control and Vee = -5V in a 50 Ohm System


Parameter		Frequency	Min.	Typ.	Max.	Units
Insertion Loss		DC - 1.0 GHz		0.7	1.1	dB
		DC - 2.0 GHz		0.8	1.2	dB
Isolation		DC - 0.5 GHz	41	45		dB
		DC - 1.0 GHz	36	40		dB
		DC - 2.0 GHz	28	32		dB
Return Loss	"On State"	DC - 1.0 GHz	21	25		dB
	"On State"	DC - 2.0 GHz	16	20		dB
	"Off State"	DC - 1.0 GHz	17	21		dB
	"Off State"	DC - 2.0 GHz	13	17		dB
Input Power for 1 dB Compression		50 MHz		22		dBm
		0.5 - 2.0 GHz		24		dBm
Input Third Order Intercept (Two-Tone Input Power = 7 dBm Each Tone).		50 MHz	25	30		dBm
		0.5 - 1.0 GHz	41	45		dBm
		0.5 - 2.0 GHz	37	41		dBm
Switching Characteristics		DC - 2.0 GHz				
				25		ns
				50		ns

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
Order On-line at www.hittite.com


HMC182S14 / 182S14E

GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 2 GHz


Insertion Loss

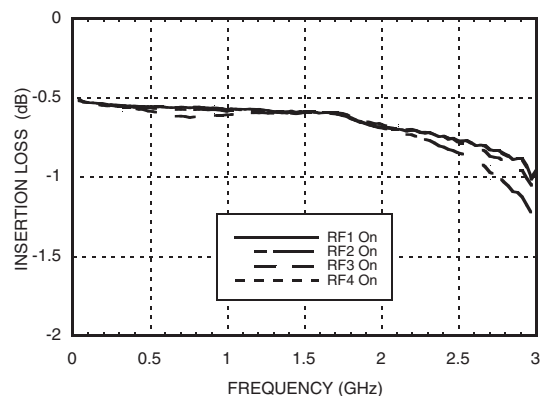


Isolation

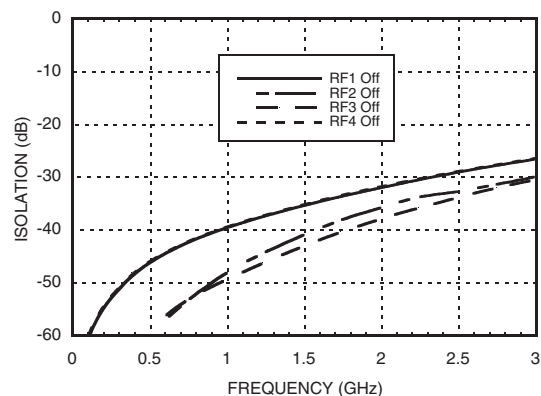

Return Loss

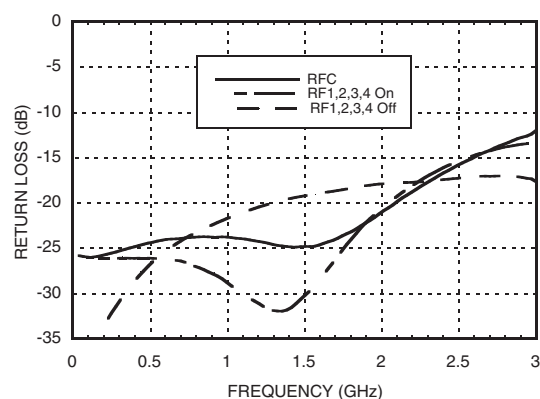

Isolation Between Several RF I/Os

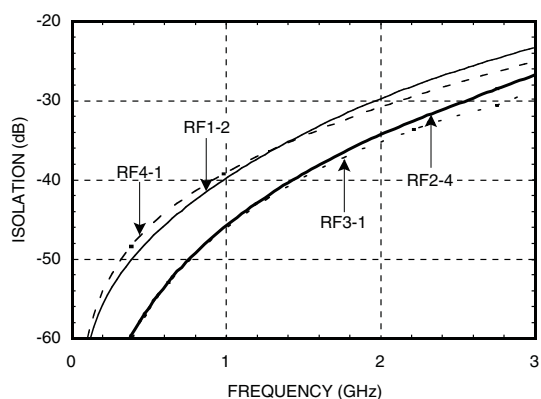

Bias Voltage & Current

Vee Range = -5.0 Vdc $\pm$ 10%		
Vee (Vdc)	Iee (Typ.) (mA)	Iee (Max.) (mA)
-5.0	4.0	7.0


Control Voltages

State	Bias Condition
Low	0 to -3 VDC @ 70 μ A Typ.
High	-5 to -4.2 VDC @ 5 μ A Typ.

Truth Table

Control Input		Signal Path State
A	B	RFCOM to:
High	High	RF1
Low	High	RF2
High	Low	RF3
Low	Low	RF4


TTL Interface Circuit

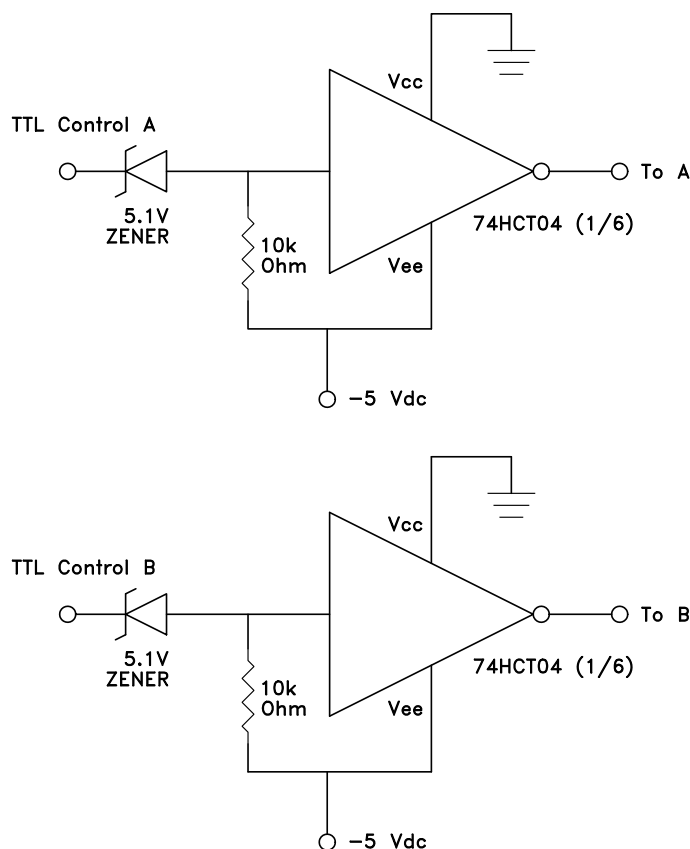

Note:

Control inputs A and B can be driven directly with TTL logic with -5 Volts applied to theHCT logic gate Vee pin and to Vee (pin 10) of the RF switch.

Evaluation PCB

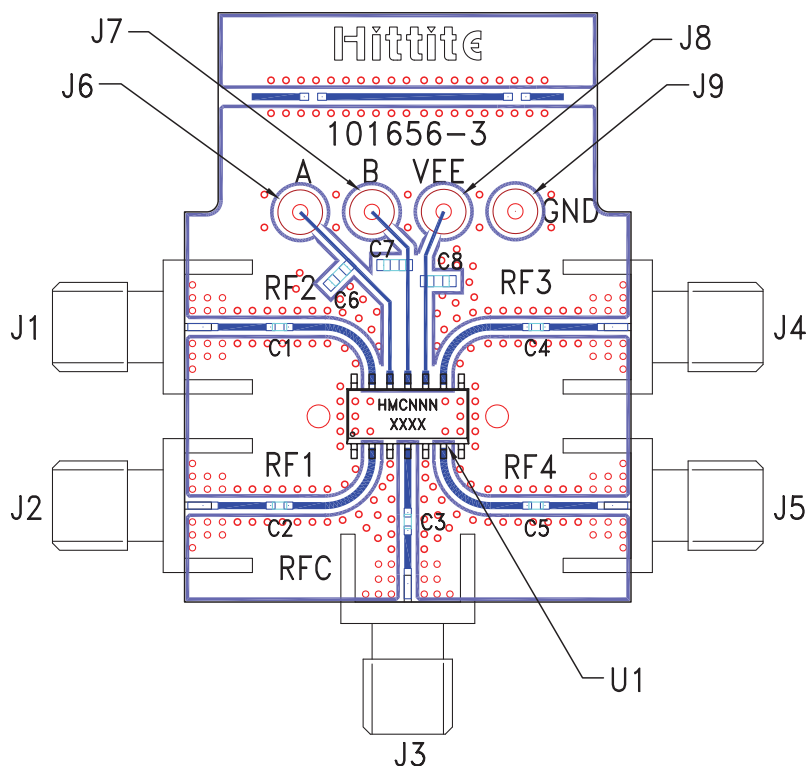

List of Materials for Evaluation PCB 101672 ^[1]

Item	Description
J1 - J5	PCB Mount SMA RF Connector
J6 - J9	DC Pin
C1 - C5	330 pF capacitor, 0402 Pkg.
C6 - C8	10,000 pF capacitor, 0603 Pkg.
U1	HMC182S14 / HMC182S14E SP4T Switch
PCB [2]	101656 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 ohm impedance and the package ground leads should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.



v03.0805



HMC182S14 / 182S14E

**GaAs MMIC SP4T NON-REFLECTIVE
SWITCH, DC - 2 GHz**

Notes:

10

SWITCHES - SMT

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com