

# ULTRA-LOW POWER, LOW INPUT VOLTAGE, CURRENT-LIMITED LOAD SWITCH WITH SHUT-OFF, AUTO-RESTART, AND OVER-CURRENT CONDITION TIME-OUT

Check for Samples: [TPS22946](#)

## FEATURES

- **Ultra-Low Quiescent Current** 1  $\mu\text{A}$  (typ) at  $V_{\text{IN}} = 1.8\text{ V}$
- **Input Voltage Range:** 1.62 V to 5.5 V
- **Low ON-Resistance**
  - $r_{\text{ON}} = 300\text{ m}\Omega$  at  $V_{\text{IN}} = 5.5\text{ V}$
  - $r_{\text{ON}} = 400\text{ m}\Omega$  at  $V_{\text{IN}} = 3.3\text{ V}$
  - $r_{\text{ON}} = 500\text{ m}\Omega$  at  $V_{\text{IN}} = 2.5\text{ V}$
  - $r_{\text{ON}} = 600\text{ m}\Omega$  at  $V_{\text{IN}} = 1.8\text{ V}$
- **Selectable Minimum Current Limit:** 155 mA, 70 mA, or 30 mA
- **Integrated Inrush Current Timeout** (8 ms)
- **Shutdown Current:** < 1  $\mu\text{A}$
- **Thermal Shutdown**
- **Fault Blanking**
- **Auto Restart**
- **Over-Current Condition Timeout** (Automatic Disable for Permanent Over-Current)
- **1.8-V Compatible Control Input**
- **ESD Performance Tested Per JESD 22**
  - 6000-V Human-Body Model (A114-B, Class II)
- **Tiny WCSP Package** 1.4mm x 0.9 mm (YZP)

## APPLICATIONS

- **Fingerprint Module Protection**
- **Portable Consumer Electronics**
- **Mobile Phones**
- **Smartphone**
- **Notebooks**
- **GPS Devices**

## DESCRIPTION

The TPS22946 is an ultra-low power load switch that provides protection to systems and loads in high-current conditions. The device contains a 300-m $\Omega$  current-limited P-channel MOSFET that can operate over an input voltage range of 1.62 V to 5.5 V. The switch is controlled by an on/off input (ON), which is capable of interfacing directly with low-voltage control signals. The TPS22946 includes thermal shutdown protection that prevents damage to the device when a continuous over-current condition causes excessive heating by turning off the switch.

When the switch current reaches the maximum limit, the TPS22946 operates in a constant-current mode to prohibit excessive currents from causing damage. The current limit can be selected using the CL input: a high CL input sets the current limit to 155 mA, a low CL input sets the current limit to 70 mA, and a floating CL input sets the current limit to 30 mA.

If the constant current condition still persists after 10 ms, the switch is turned off and the fault signal pin (OC) is pulled low. The TPS22946 has an auto-restart feature which turns the switch on again after 70 ms if the ON pin is still active. If the TPS22946 remains in an over-current condition for 5 seconds, the device shuts off until it is turned back on by setting the ON control signal off and then on again.

If the device is used to protect an LDO, the inrush current required by the LDO at startup can, in some cases, exceed the current limit and initiate a blanking (current limiting) condition. TPS22946 provides allowance for this scenario during startup of the LDO by temporarily increasing the current limit to 435-mA for 8-ms after the load switch is enabled.

The TPS22946 is available in space-saving 6-terminal WCSP (YZP) package. It is characterized for operation over the free-air temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

**Table 1. FEATURE LIST**

	$r_{\text{ON}}$ (TYP) AT 5.5 V	CURRENT LIMIT	INTEGRATED INRUSH CURRENT TIMEOUT	CURRENT LIMIT BLANKING TIME	AUTO-RESTART TIME	OVER-CURRENT TIMEOUT	ENABLE
TPS22946	300 m $\Omega$	30 mA, 70 mA, or 155 mA	Yes	10 ms	70 ms	6 s	Active high




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

**ORDERING INFORMATION<sup>(1)</sup>**

<b>T<sub>A</sub></b>	<b>PACKAGE<sup>(2)</sup></b>		<b>ORDERABLE PART NUMBER</b>	<b>TOP-SIDE MARKING<sup>(3)</sup></b>
–40°C to 85°C	WCSP – YZP (0.5-mm pitch)	Reel of 3000	TPS22946YZPR	_ _ 5 H _

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).
- (2) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).
- (3) The actual top-side marking has two preceding characters to denote year, month and one following character to designate the wafer fab/assembly site. Pin 1 identifier indicates solder-bump composition (1 = SnPb, • = Pb-free).

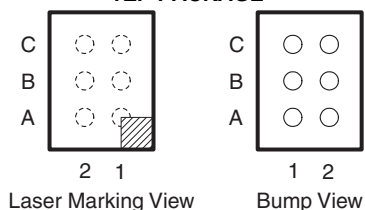
**YZP PACKAGE****TERMINALS ASSIGNMENTS**

<b>C</b>	ON	OC
<b>B</b>	CL	GND
<b>A</b>	V <sub>IN</sub>	V <sub>OUT</sub>
	<b>2</b>	<b>1</b>

**TERMINAL FUNCTIONS**

<b>TERMINAL</b>		<b>TYPE</b>	<b>DESCRIPTION</b>
<b>NO.</b>	<b>NAME</b>		
A1	V <sub>OUT</sub>	O	Output of the power switch
B1	GND	–	Ground
C1	OC	O	Over-current output flag. Active-low open-drain output that indicates an over-current, supply under-voltage, or over-temperature state.
C2	ON	I	On/off control input
B2	CL	I	Current limit selection. CL high is 155-mA current limit, CL low is 70-mA current limit, and CL floating is 30-mA current limit.
A2	V <sub>IN</sub>	I	Supply. Input to the power switch and the supply voltage for the device

## Functional Block Diagram

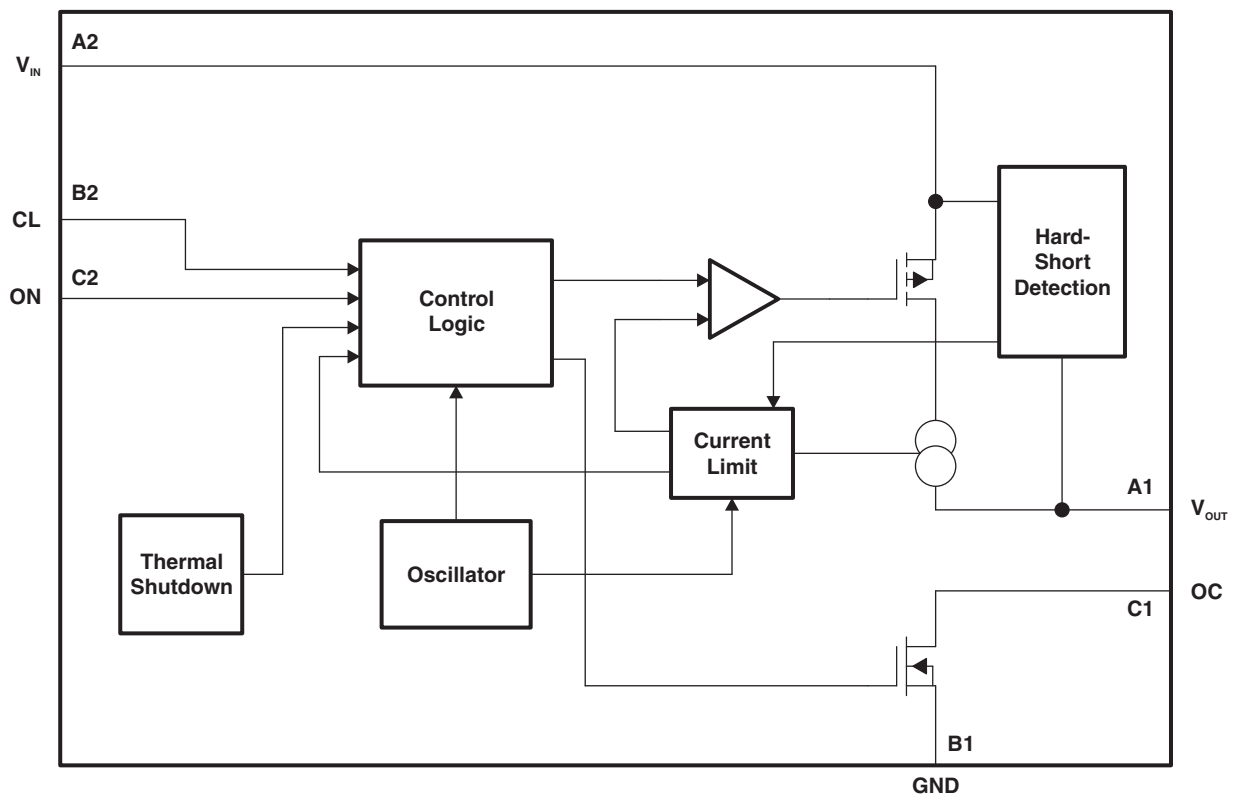

**Table 2. FUNCTION TABLE**

ON	CL	TPS22946
L	x	$V_{IN}$ to $V_{OUT}$ switch is off (open)
H	x	$V_{IN}$ to $V_{OUT}$ switch is on (closed)
x	H <sup>(1)</sup>	Current limit set to 155 mA
x	L <sup>(1)</sup>	Current limit set to 70 mA
x	Float <sup>(2)</sup>	Current limit set to 30 mA

(1) Resistance to VCC or GND < 100  $\Omega$

(2) Load on CL: C < 100 pF, R > 10 M $\Omega$

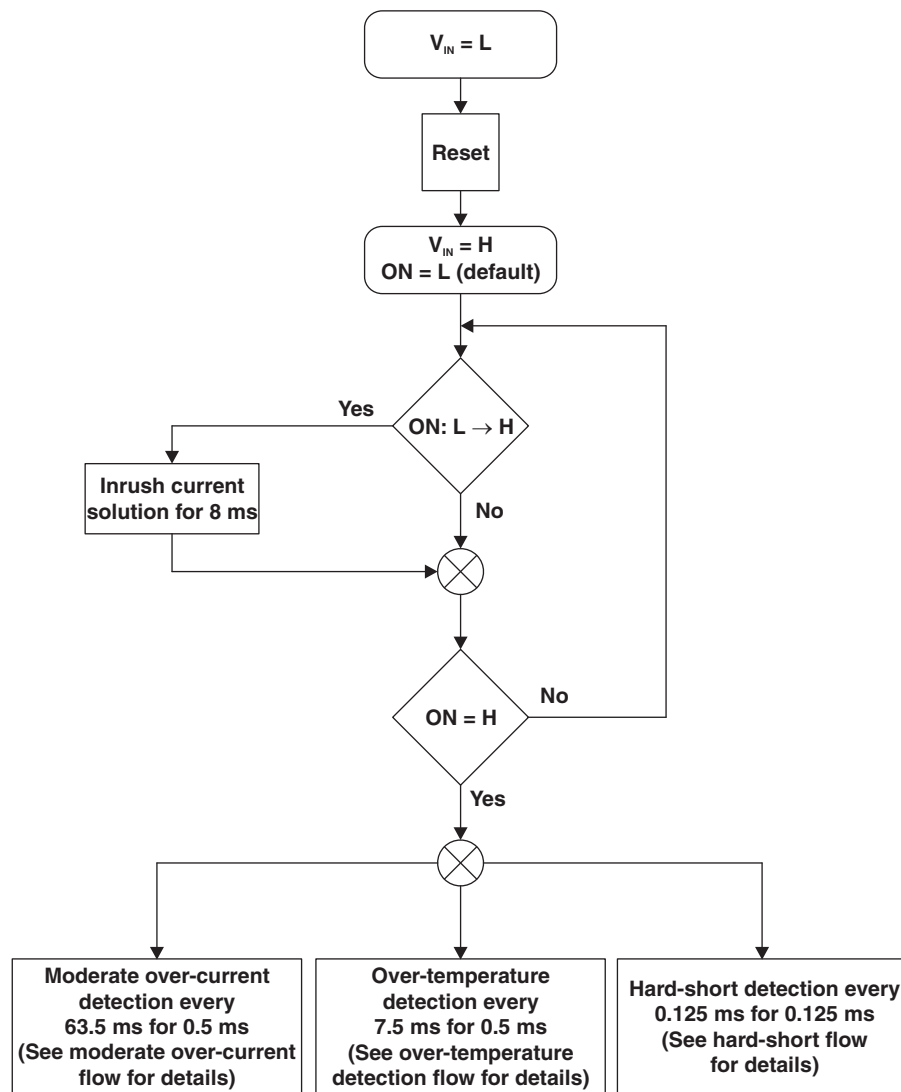


Figure 1. Functional Flow Diagram

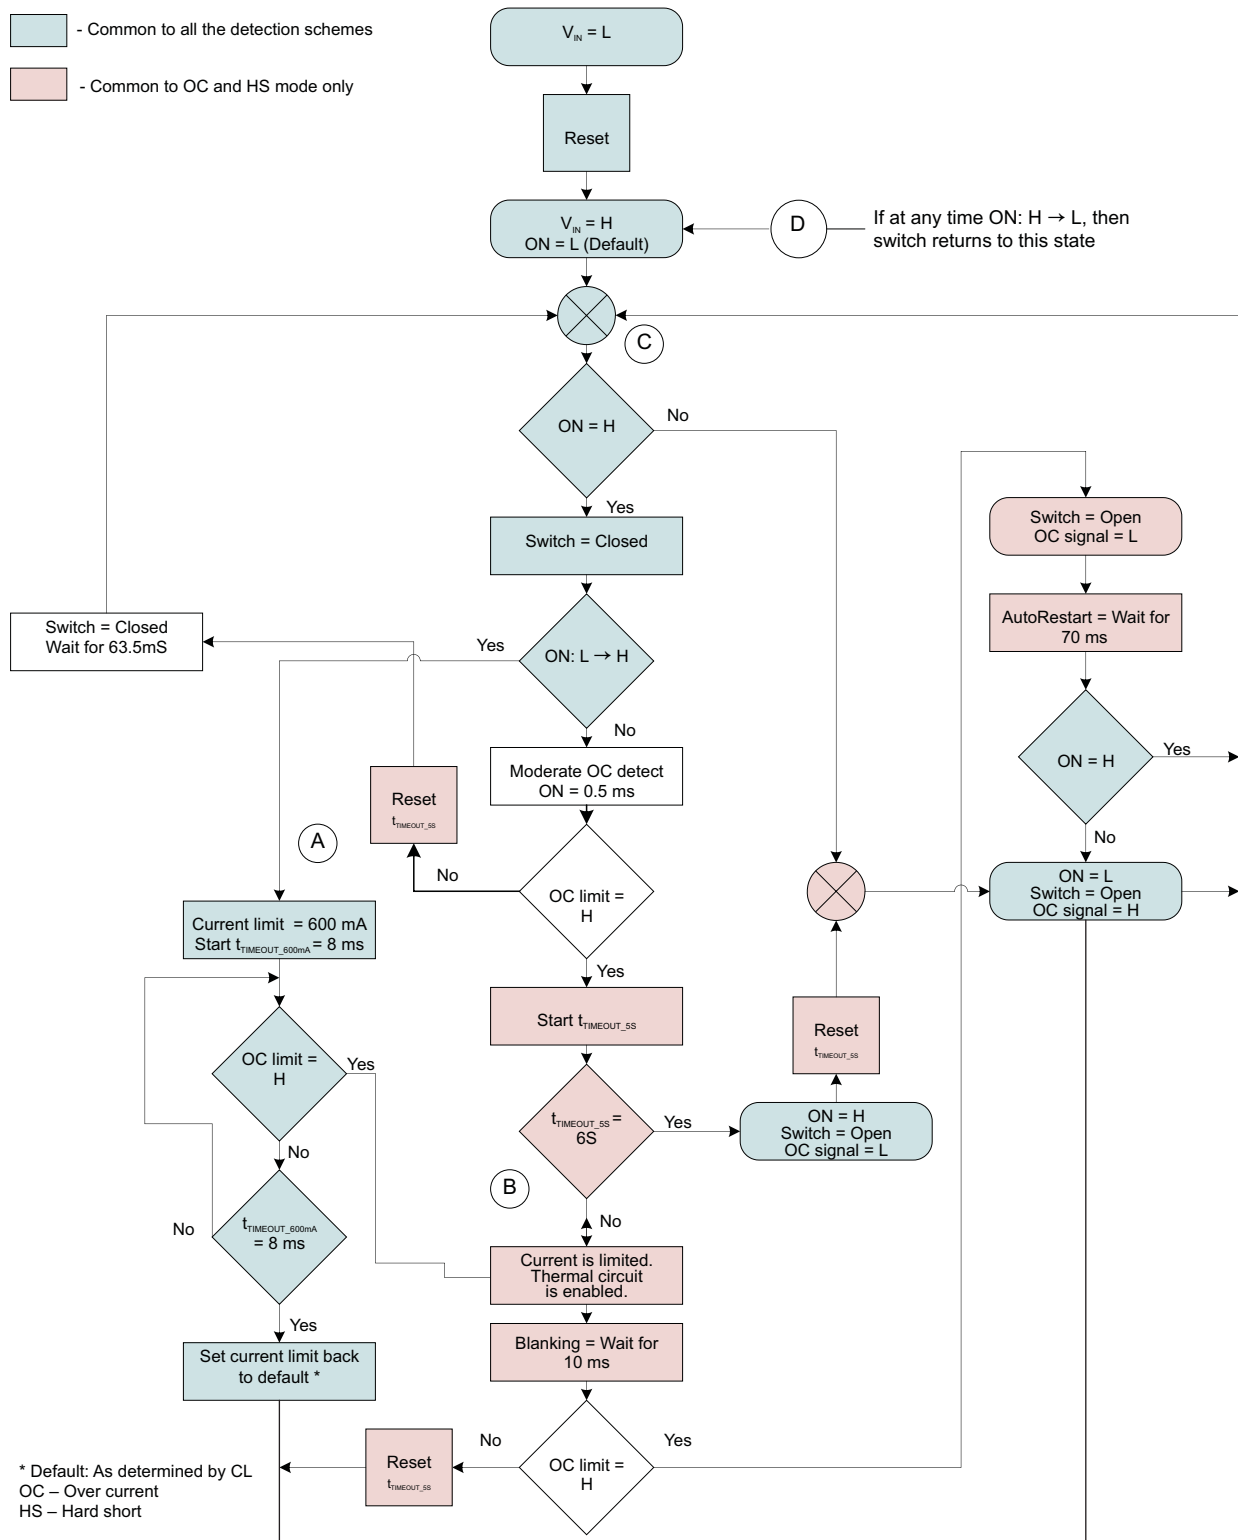


Figure 2. Moderate Over-Current Detection Flow Diagram

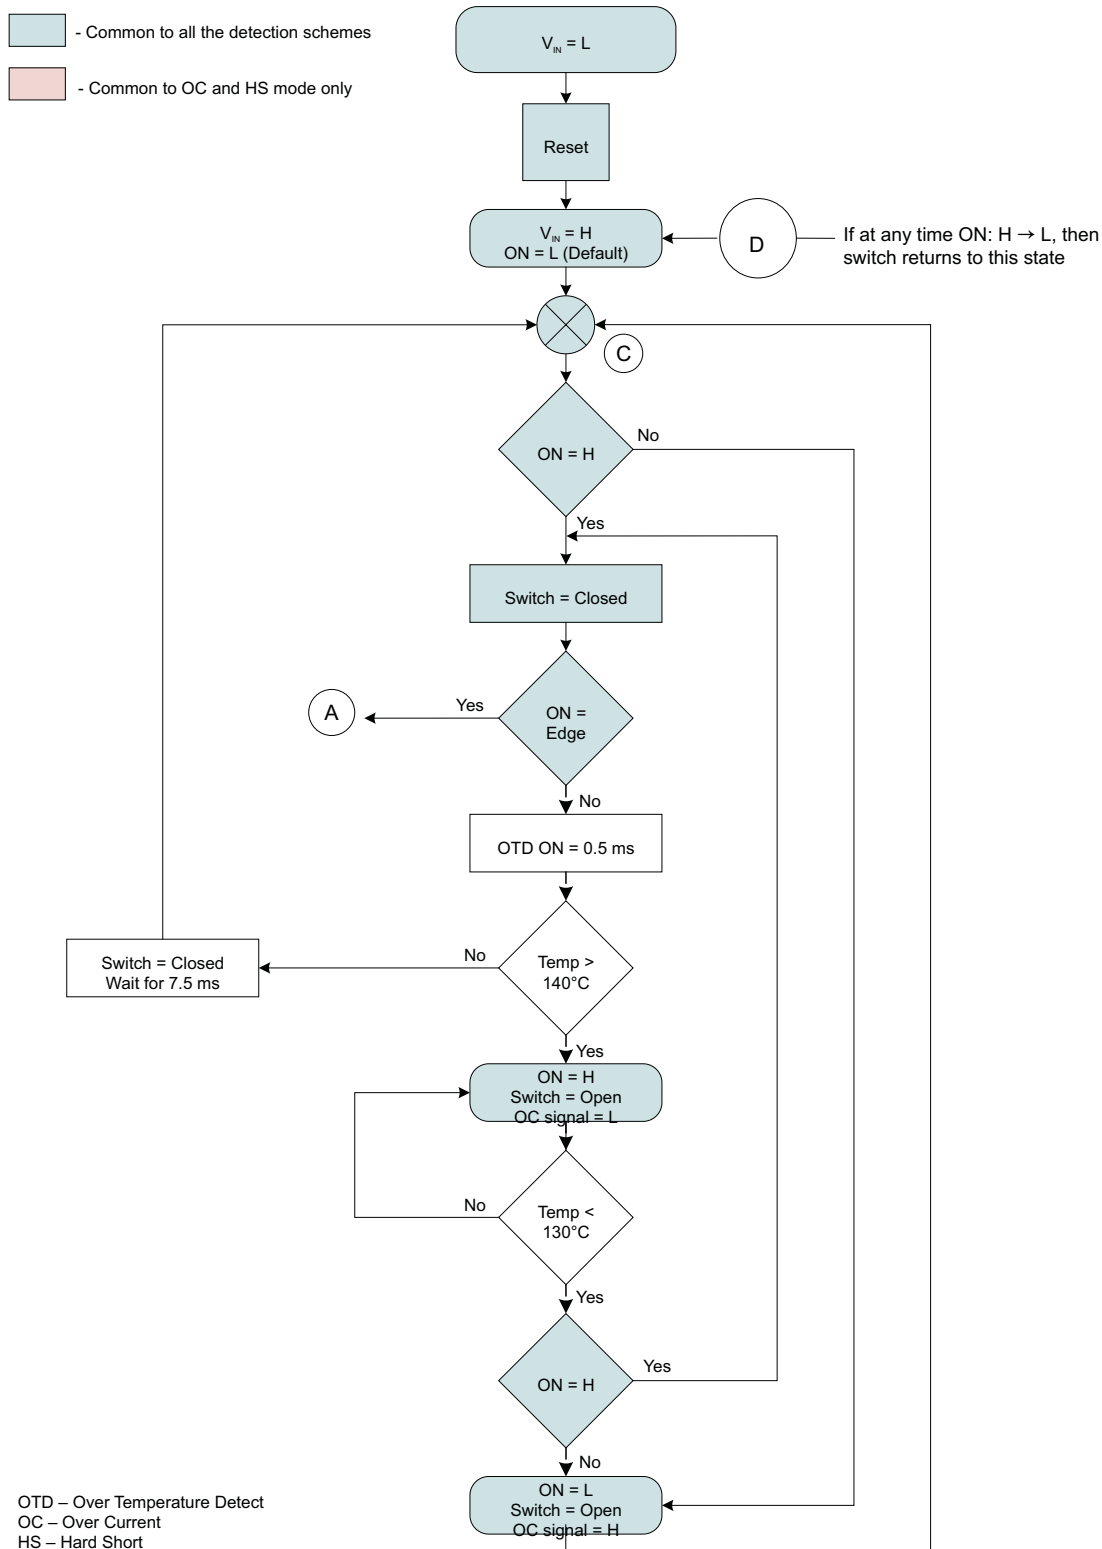


Figure 3. Over-Temperature Detection Flow Diagram

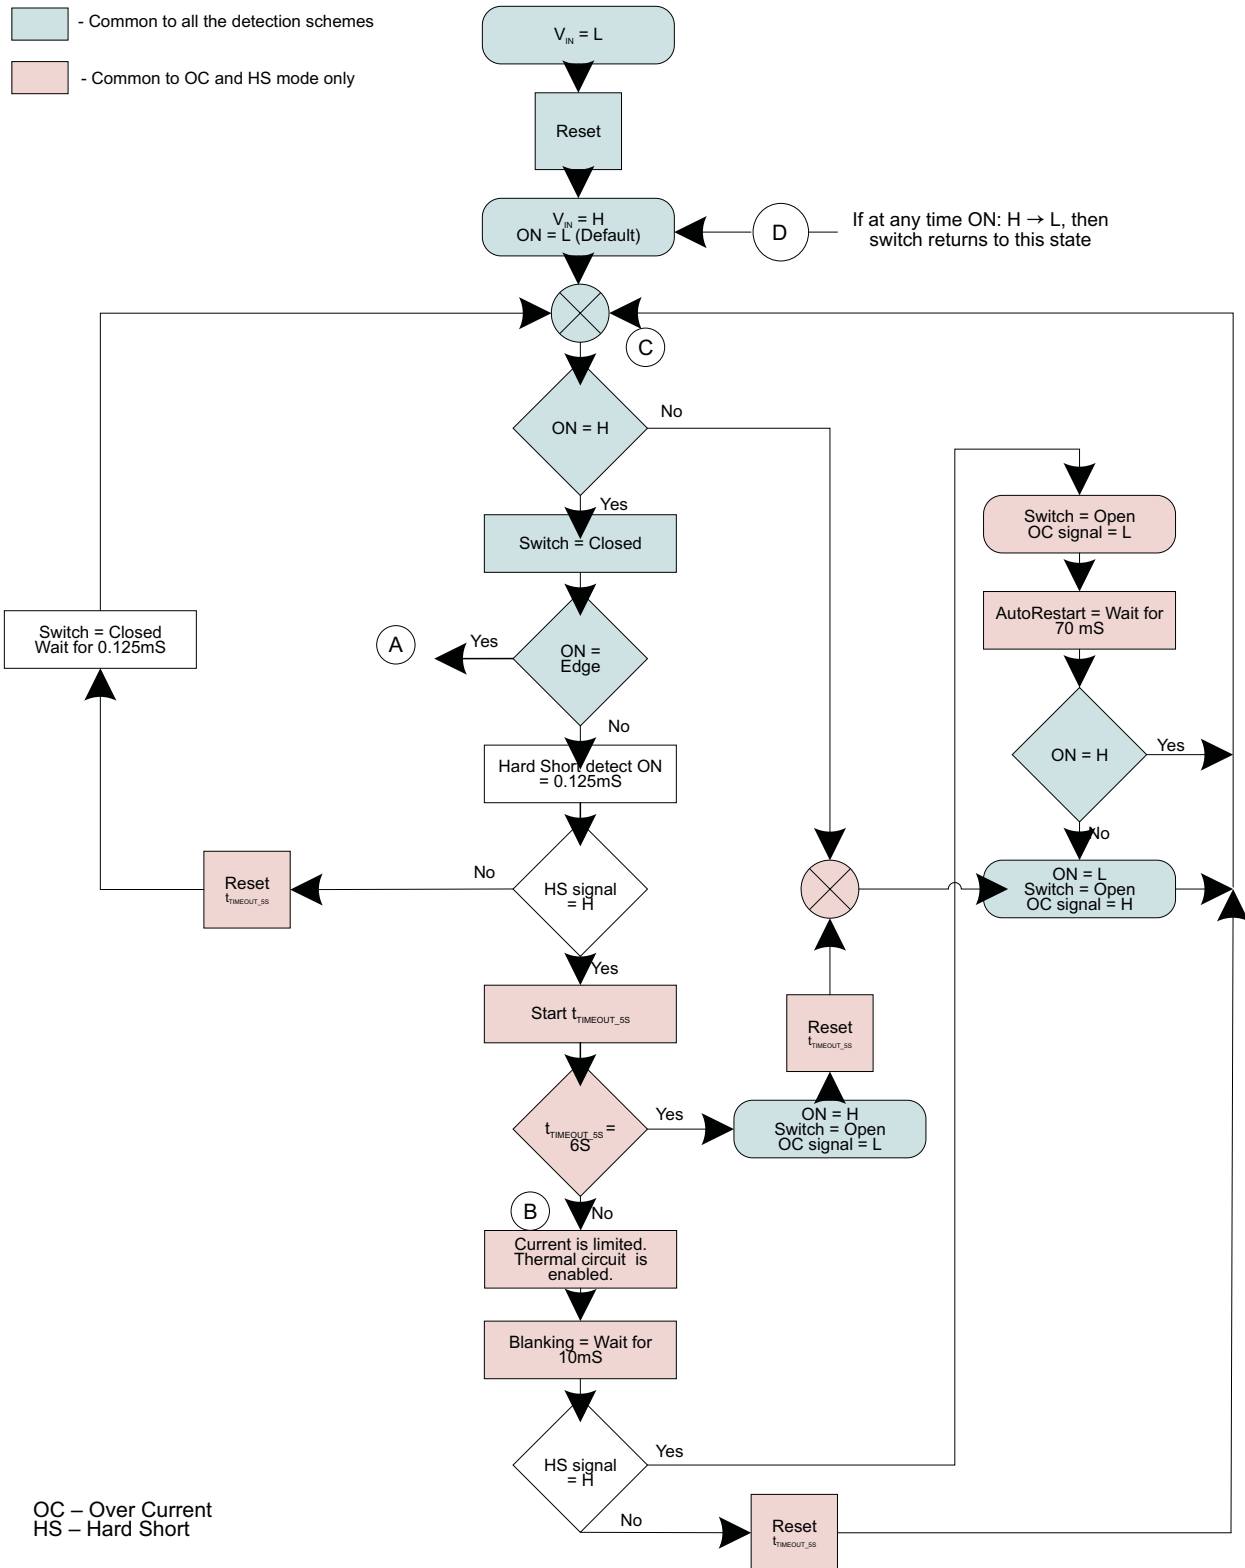


Figure 4. Hard Short-Circuit Detection Flow Diagram

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)

$V_I$	Input voltage	$V_{IN}$ , $V_{OUT}$ , $ON$ , $CL$	–0.3 V to 6 V
$T_J$	Operating junction temperature range		–40°C to 125°C
$T_{stg}$	Storage temperature range		–65°C to 150°C
ESD	Electrostatic discharge protection	Human-body model (HBM)	6000 V

## DISSIPATION RATINGS<sup>(1)</sup>

BOARD	PACKAGE	$R_{\theta JC}$	$R_{\theta JA}$	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A < 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$	$T_A = 85^\circ\text{C}$
High-K(1)	YZP	17.6°C/W	123.36°C/W	–8.1063 mW/°C	810.63 mW	445.84 mW	324.25 mW

(1) The JEDEC high-K (2s2p) board used to derive this data was a 3-in x 3-in, multilayer board with 1-ounce internal power and ground planes and 2-ounce copper traces on top and bottom of the board.

## RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

				MIN	MAX	UNIT
$V_{IN}$	Input voltage			1.62	5.5	V
$V_{ON}$	ON pin voltage			0	5.5	V
$V_{CL}$	CL pin voltage			0	$V_{IN}$	V
$V_{OUT}$	OUT pin voltage			0	$V_{IN}$	V
$T_A$	Ambient free-air temperature			–40	85	°C
$t_{CLSET}$	CL pin setting time			8		ms
$C_{IN}$	Input capacitor			1 <sup>(1)</sup>		μF
$V_{IH}$	ON high-level input voltage	$V_{IN} = 1.8\text{ V}$		1.1	5.5	V
		$V_{IN} = 2.5\text{ V}$		1.2	5.5	
		$V_{IN} = 3.3\text{ V}$		1.3	5.5	
		$V_{IN} = 5.5\text{ V}$		1.4	5.5	
$V_{IL}$	ON low-level input voltage	$V_{IN} = 1.8\text{ V}$			0.4	V
		$V_{IN} = 2.5\text{ V}$			0.4	
		$V_{IN} = 3.3\text{ V}$			0.5	
		$V_{IN} = 5.5\text{ V}$			0.6	
$V_{IH}$	CL low-level input voltage	$V_{IN} = 1.62\text{ V to } 5.5\text{ V}$ , $I_{IH} = 55\text{ }\mu\text{A}$		0.7 $V_{IN}$	$V_{IN}$	V
$V_{IL}$	CL high-level input voltage	$V_{IN} = 1.62\text{ V to } 5.5\text{ V}$ , $I_{IL} = 55\text{ }\mu\text{A}$		GND	0.3 $V_{IN}$	V

(1) See the Application Information section of this data sheet.



## ELECTRICAL CHARACTERISTICS

 $V_{IN} = 1.62\text{ V to }5.5\text{ V}$ , TYP values at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T <sub>A</sub> <sup>(1)</sup>	MIN	TYP	MAX	UNIT
I <sub>IN</sub>	Average quiescent current	I <sub>OUT</sub> = 0 mA, V <sub>IN</sub> = 4.5 V to 5.5 V		Full range		1.5	5	μA
		I <sub>OUT</sub> = 0 mA, V <sub>IN</sub> = 3.0 V to 3.6 V				1.3	4	
		I <sub>OUT</sub> = 0 mA, V <sub>IN</sub> = 1.62 V to 1.98 V				1	3	
I <sub>IN(OFF)</sub>	OFF state supply current	V <sub>ON</sub> = 0 V	V <sub>IN</sub> = 3.6 V, V <sub>OUT</sub> open	Full range		0.1	1	μA
I <sub>OUT(LEAKAGE)</sub>	OFF state switch current	V <sub>ON</sub> = 0 V	V <sub>IN</sub> = 3.6 V, V <sub>OUT</sub> short to GND	Full range		0.1	1.1	μA
r <sub>ON</sub>	ON-state resistance	I <sub>OUT</sub> = -100 mA	V <sub>IN</sub> = 5.5 V	25°C		0.3	0.4	Ω
				Full range			0.45	
			V <sub>IN</sub> = 3.3 V	25°C		0.4	0.5	
				Full range			0.55	
			V <sub>IN</sub> = 2.5 V	25°C		0.5	0.6	
				Full range			0.65	
			V <sub>IN</sub> = 1.8 V	25°C		0.6	0.8	
				Full range			0.85	
			V <sub>IN</sub> = 1.62 V	25°C		0.7	0.9	
				Full range			1	
I <sub>ON</sub>	ON input leakage current	V <sub>ON</sub> = V <sub>IN</sub> or GND		Full range			1	μA
I <sub>LIM</sub>	Current limit	V <sub>IN</sub> = 1.8 V, V <sub>OUT</sub> = 1.5 V, CL = GND		Full range	70	85	120	mA
		V <sub>IN</sub> = 3.3 V, V <sub>OUT</sub> = 3.0 V, CL = GND		Full range	60	80	115	
		V <sub>IN</sub> = 1.8 V, V <sub>OUT</sub> = 1.5 V, CL = VIN		Full range	155	175	235	
		V <sub>IN</sub> = 3.3 V, V <sub>OUT</sub> = 3.0 V, CL = VIN		Full range	135	165	230	
		V <sub>IN</sub> = 1.8 V, V <sub>OUT</sub> = 1.5 V, CL floating		Full range	30	45	60	
		V <sub>IN</sub> = 3.3 V, V <sub>OUT</sub> = 3.0 V, CL floating		Full range	28	40	60	
I <sub>limit_inrush</sub>	Inrush current limit	R <sub>I</sub> = 1 Ω, V <sub>IN</sub> = 3.3 V, V <sub>OUT</sub> = 2.3 V		Full range	375	435	685	mA
	Thermal shutdown <sup>(2)</sup>	Shutdown threshold		Full range		135		°C
		Return from shutdown				125		
		Hysteresis				10		
V <sub>OL</sub>	OC output logic low voltage	V <sub>IN</sub> = 5 V, I <sub>SINK</sub> = 10 mA		Full range		0.1	0.2	V
		V <sub>IN</sub> = 1.8 V, I <sub>SINK</sub> = 10 mA				0.1	0.3	
I <sub>OH</sub>	OC output high leakage current	V <sub>IN</sub> = 5 V, Switch ON		Full range			1	μA

(1) Full range  $T_A = -40^\circ\text{C to }85^\circ\text{C}$ 

(2) See the Application Information section of this data sheet.

## SWITCHING CHARACTERISTICS

$V_{IN} = 1.8\text{ V}$ ,  $R_L = 50\ \Omega$ ,  $C_L = 1\ \mu\text{F}$ ,  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ , TYP values at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{PWON}$	Power-ON time	$R_L = 50\ \Omega$ , $C_L = 1\ \mu\text{F}$		192		$\mu\text{s}$
$t_{PWROFF}$	Power-OFF time	$R_L = 50\ \Omega$ , $C_L = 1\ \mu\text{F}$		0.55		$\mu\text{s}$
$t_{ON}$	Turn-ON time	$R_L = 50\ \Omega$ , $C_L = 1\ \mu\text{F}$		125		$\mu\text{s}$
$t_{OFF}$	Turn-OFF time	$R_L = 50\ \Omega$ , $C_L = 1\ \mu\text{F}$		115		$\mu\text{s}$
$t_R$	$V_{OUT}$ rise time	$R_L = 50\ \Omega$ , $C_L = 1\ \mu\text{F}$		35		$\mu\text{s}$
$t_F$	$V_{OUT}$ fall time	$R_L = 50\ \Omega$ , $C_L = 1\ \mu\text{F}$		120		$\mu\text{s}$
$t_{BLANK}$	Over-current blanking time		7	10	15	ms
$t_{RSTART}$	Auto-restart time		50	70	95	ms
$t_{TIMEOUT}$	Over-current detection timeout <sup>(1)</sup>	$V_{IN} = V_{ON} = 3.3\text{ V}$ , hard short <sup>(2)</sup>		6000		ms
$t_{OVRTMP}$	Over-temperature detection maximum response time			7.7		ms
$t_{MODOC}$	Moderate over-current detection maximum response time	$V_{IN} = V_{ON} = 1.8\text{ V}$ , Moderate over-current condition <sup>(3)</sup>		63.5		ms
		$V_{IN} = V_{ON} = 3.3\text{ V}$ , Moderate over-current condition <sup>(3)</sup>		65.5		
$t_{HARDSHORT}$	Hard-short detection maximum response time	$V_{IN} = V_{ON} = 1.8\text{ V}$ , hard short <sup>(2)</sup>		270		$\mu\text{s}$
		$V_{IN} = V_{ON} = 3.3\text{ V}$ , hard short <sup>(2)</sup>		295		

(1) See the *Automatic Disable in Case of Permanent Over Current* section in *Application Information*.

(2) Hard short check is performed at the output voltage of the switch. Hard short condition is active when  $V_{OUT} < 2/3 V_{IN}$ . Please refer to application information.

(3) If the current going through the switch is above  $I_{LIM}$ , then the moderate over-current condition is activated

## PARAMETER MEASUREMENT INFORMATION

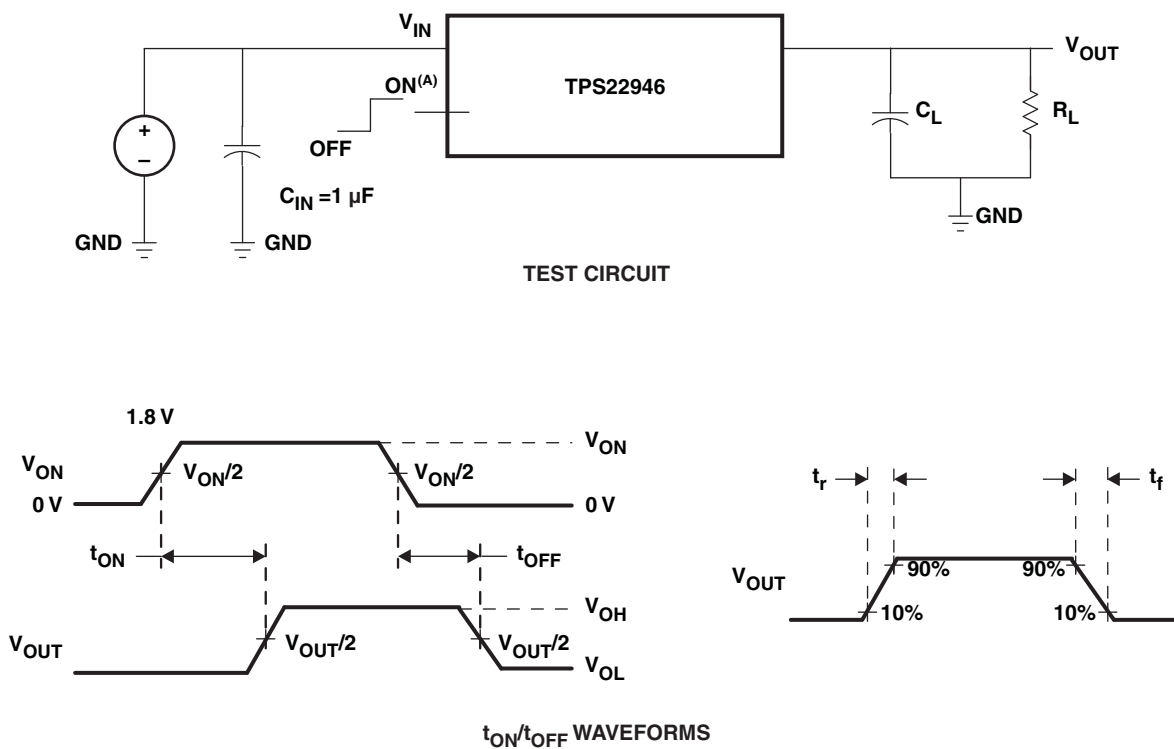


Figure 5. Test Circuit and  $t_{ON}/t_{OFF}$  Waveforms

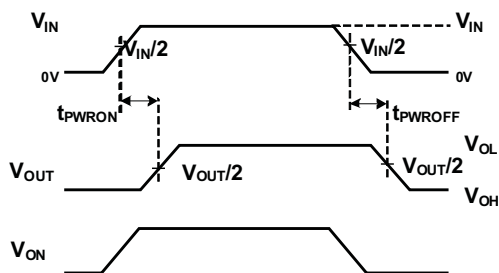


Figure 6.  $t_{PWROFF}/t_{PWROFF}$  Waveforms

## TYPICAL CHARACTERISTICS

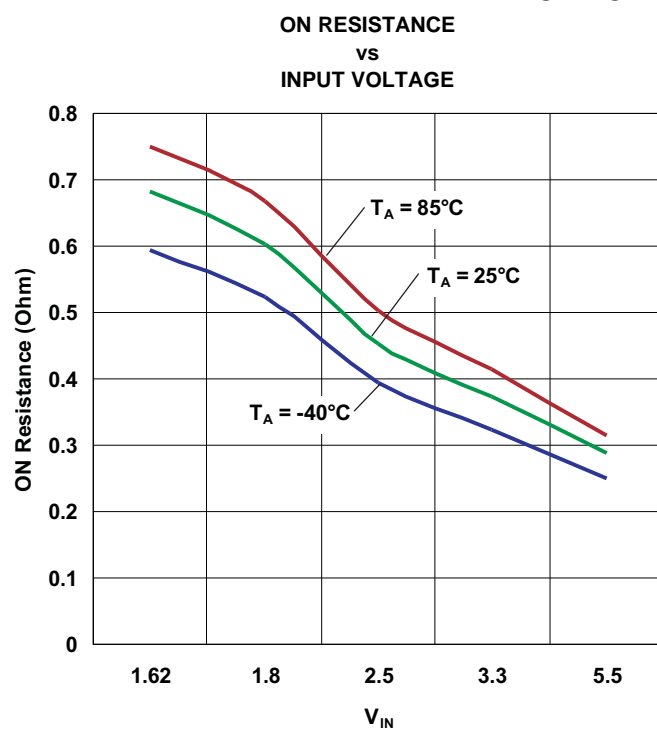


Figure 7.

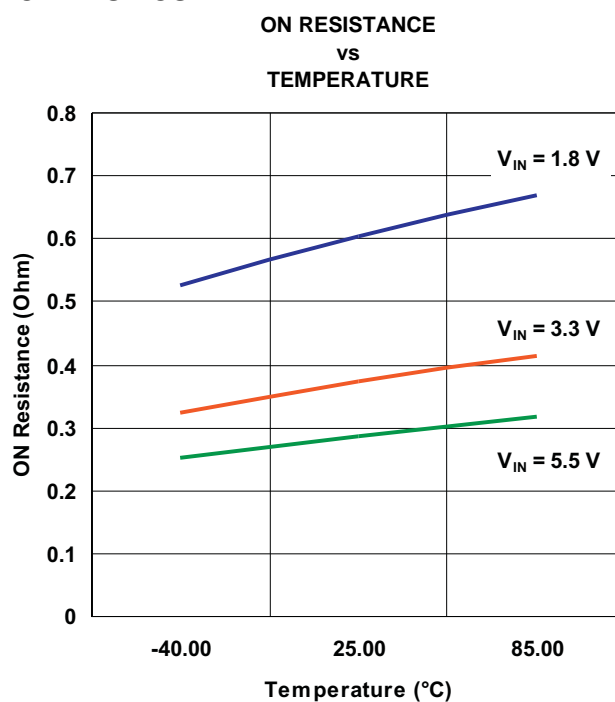


Figure 8.

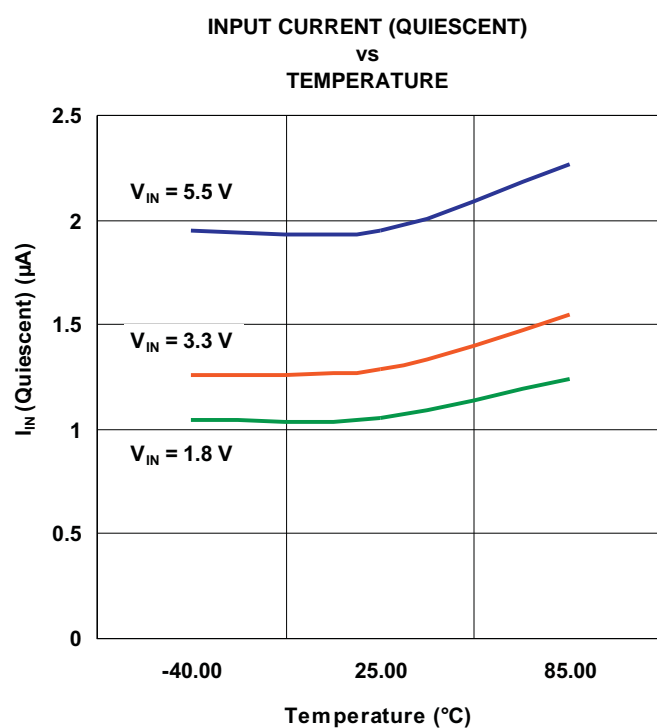


Figure 9.

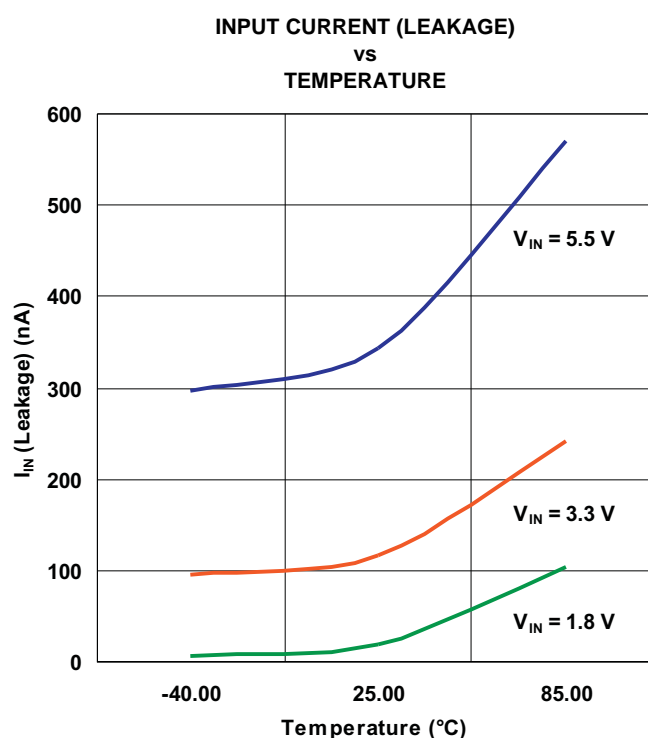


Figure 10.

## TYPICAL CHARACTERISTICS (continued)

INPUT CURRENT (OFF)  
vs  
TEMPERATURE

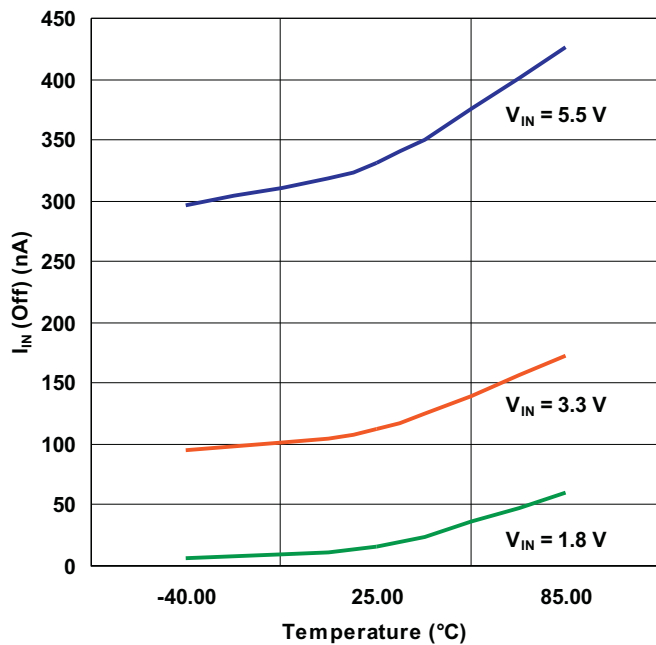


Figure 11.

CURRENT LIMIT  
vs  
TEMPERATURE

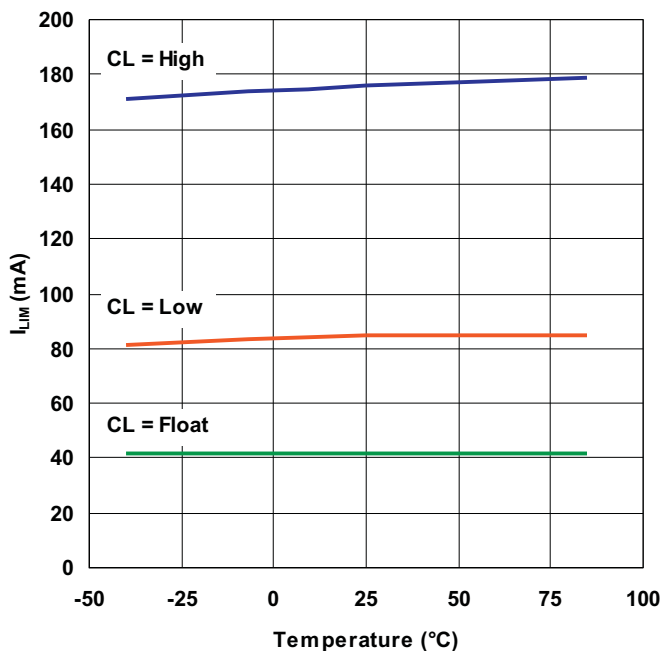


Figure 12.

CURRENT LIMIT  
vs  
INPUT VOLTAGE

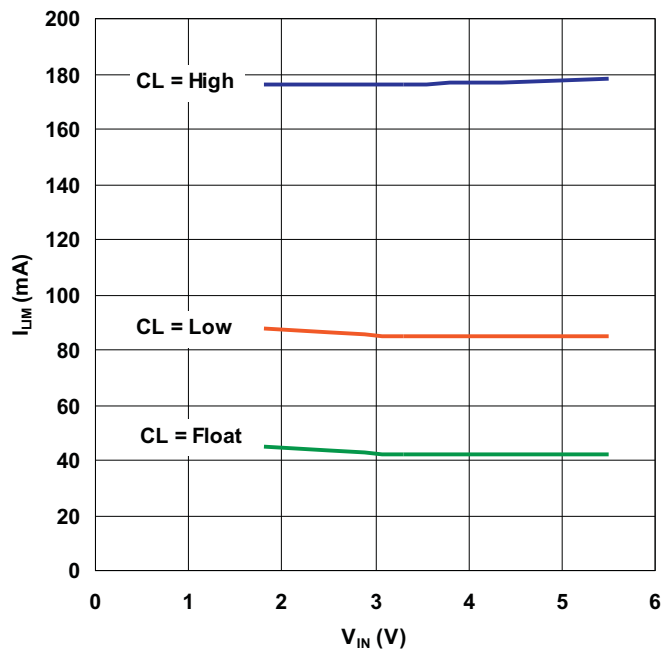


Figure 13.

$t_{Blank}$   
vs  
TEMPERATURE

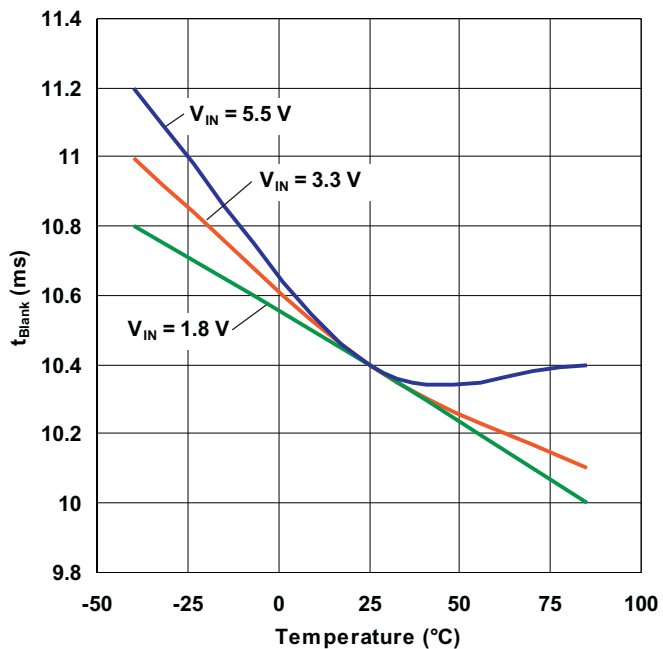


Figure 14.

## TYPICAL CHARACTERISTICS (continued)

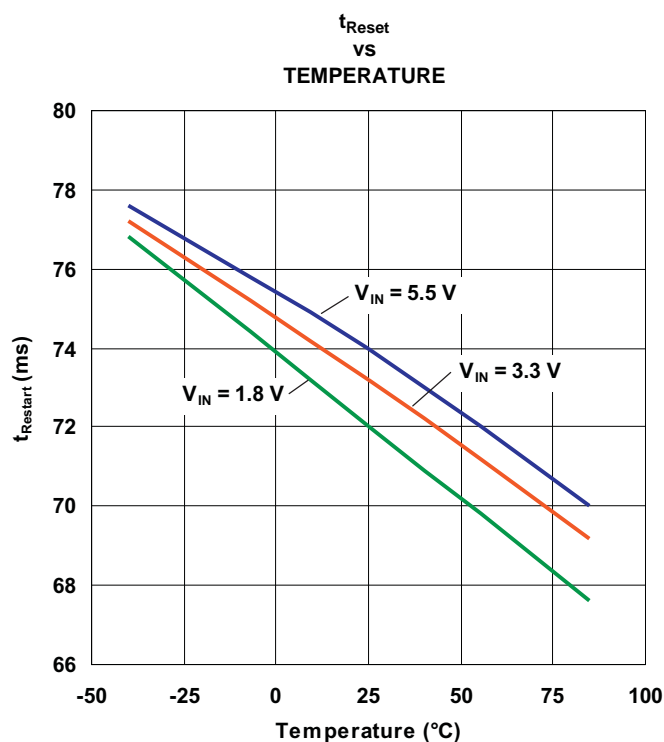


Figure 15.

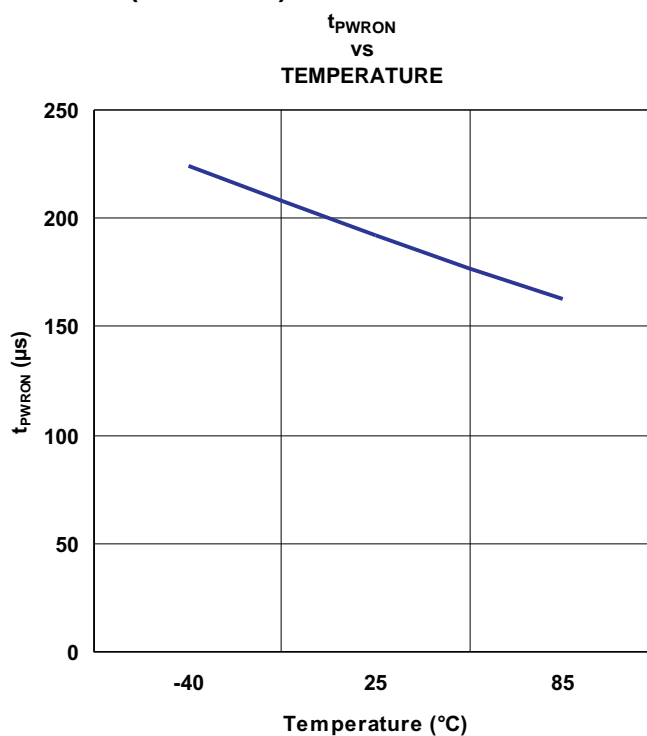


Figure 16.

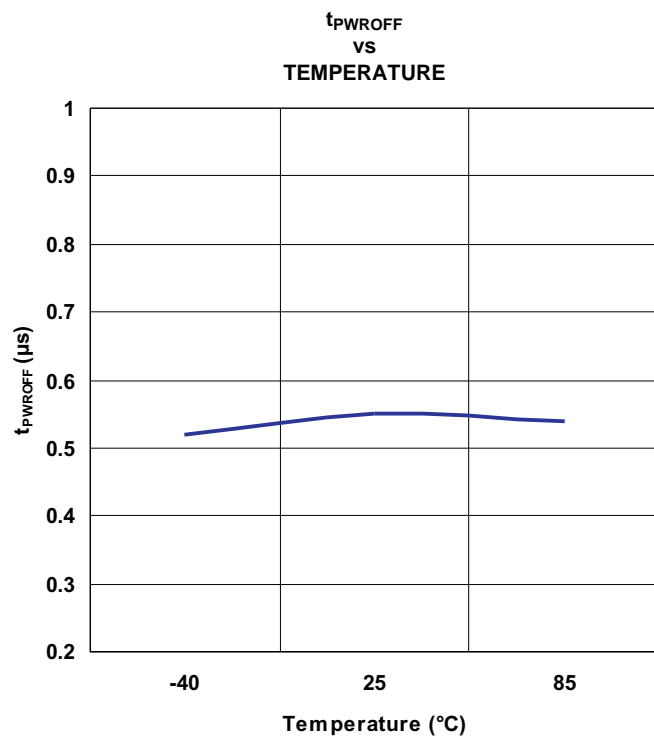


Figure 17.

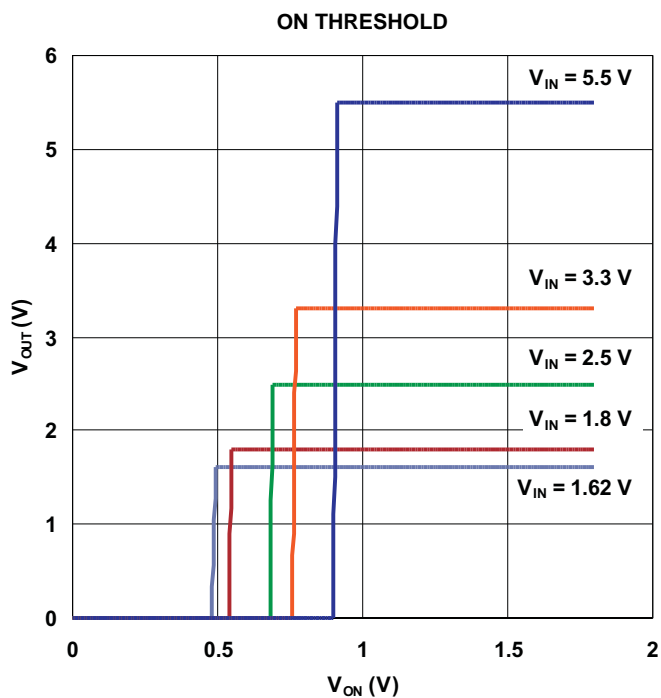


Figure 18.

## APPLICATION INFORMATION

### On/Off Control


The ON pin controls the state of the switch. Activating ON continuously holds the switch in the on state so long as there is no fault. A junction temperature in excess of 150°C overrides the ON control to turn off the switch. ON is active HIGH and has a low threshold making it capable of interfacing with low voltage signals. When the MOSFET is off, the body diode is disabled so no current can flow through it from the input to the output, however it does not prevent reverse current flowing.

### Detection Schemes

#### Over-Temperature Detection

The thermal shutdown detection circuit is active every 8mS for a period of 0.5mS. The thermal shutdown protects the part from internally or externally generated excessive temperatures. During an over-temperature condition the switch is turned-off (Open). The switch automatically turns-on (closes) again if temperature of the die drops below the threshold temperature while the part is still enabled.


In addition, if an over-current fault condition is detected due to a moderate over-current or a hard-short, the thermal shutdown is activated immediately and stays on continuously for the duration of blanking (see [Figure 3](#)).

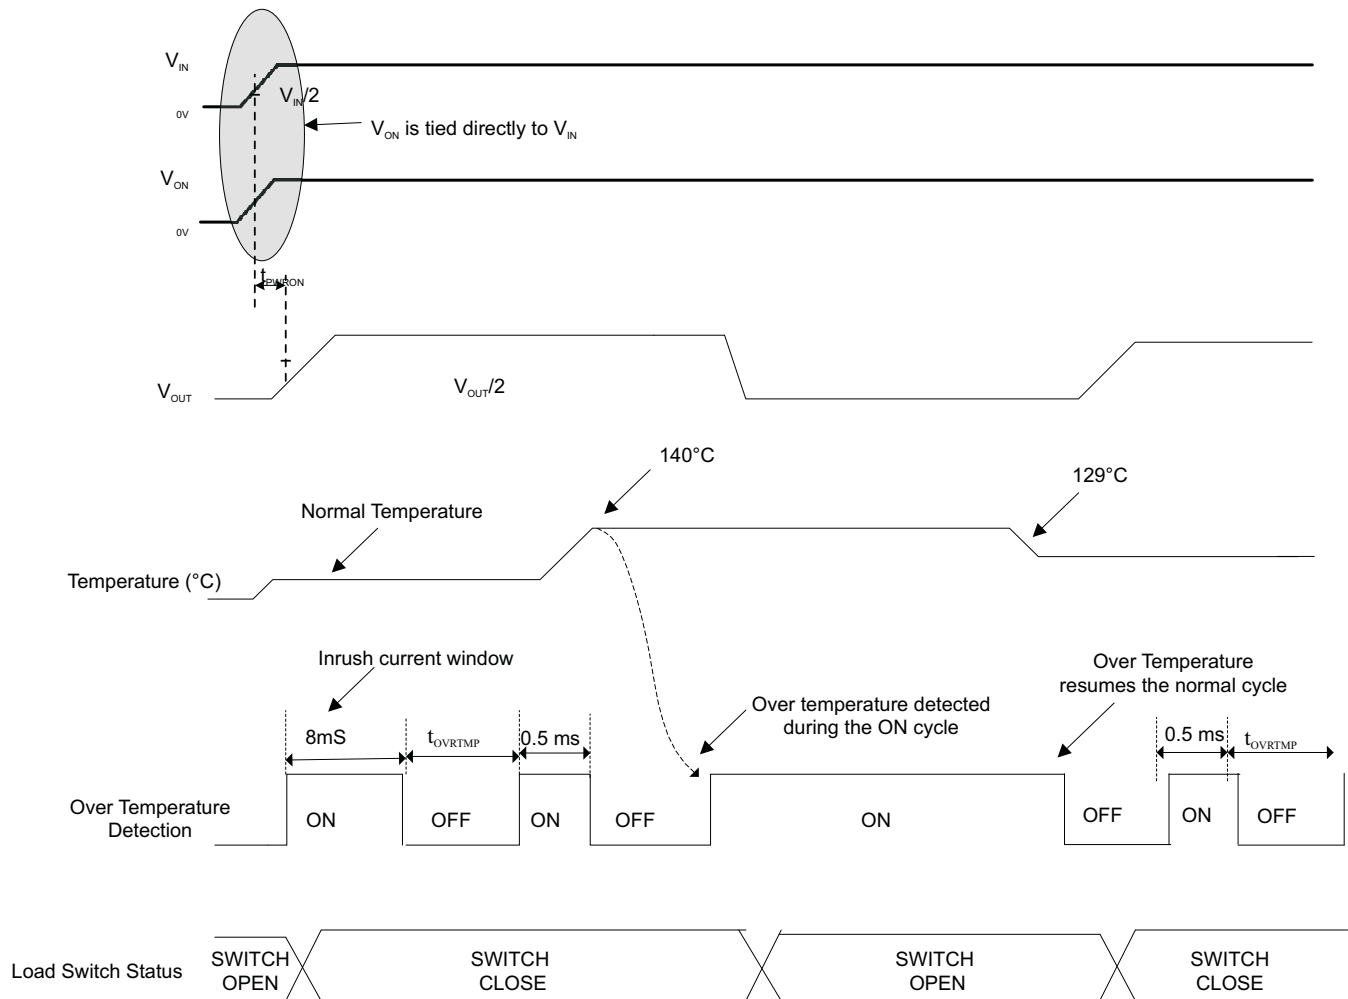

**Figure 26. Over-Temperature Detection**

## Hard-Short Detection

The hard short detection circuit is active every 250  $\mu\text{s}$  for a period of 125  $\mu\text{s}$ . A comparator monitors the output voltage,  $V_{\text{OUT}}$ . A hard short is detected when  $V_{\text{OUT}}$  is lower than  $2/3 V_{\text{IN}}$ . The switch then goes into current-limiting mode.

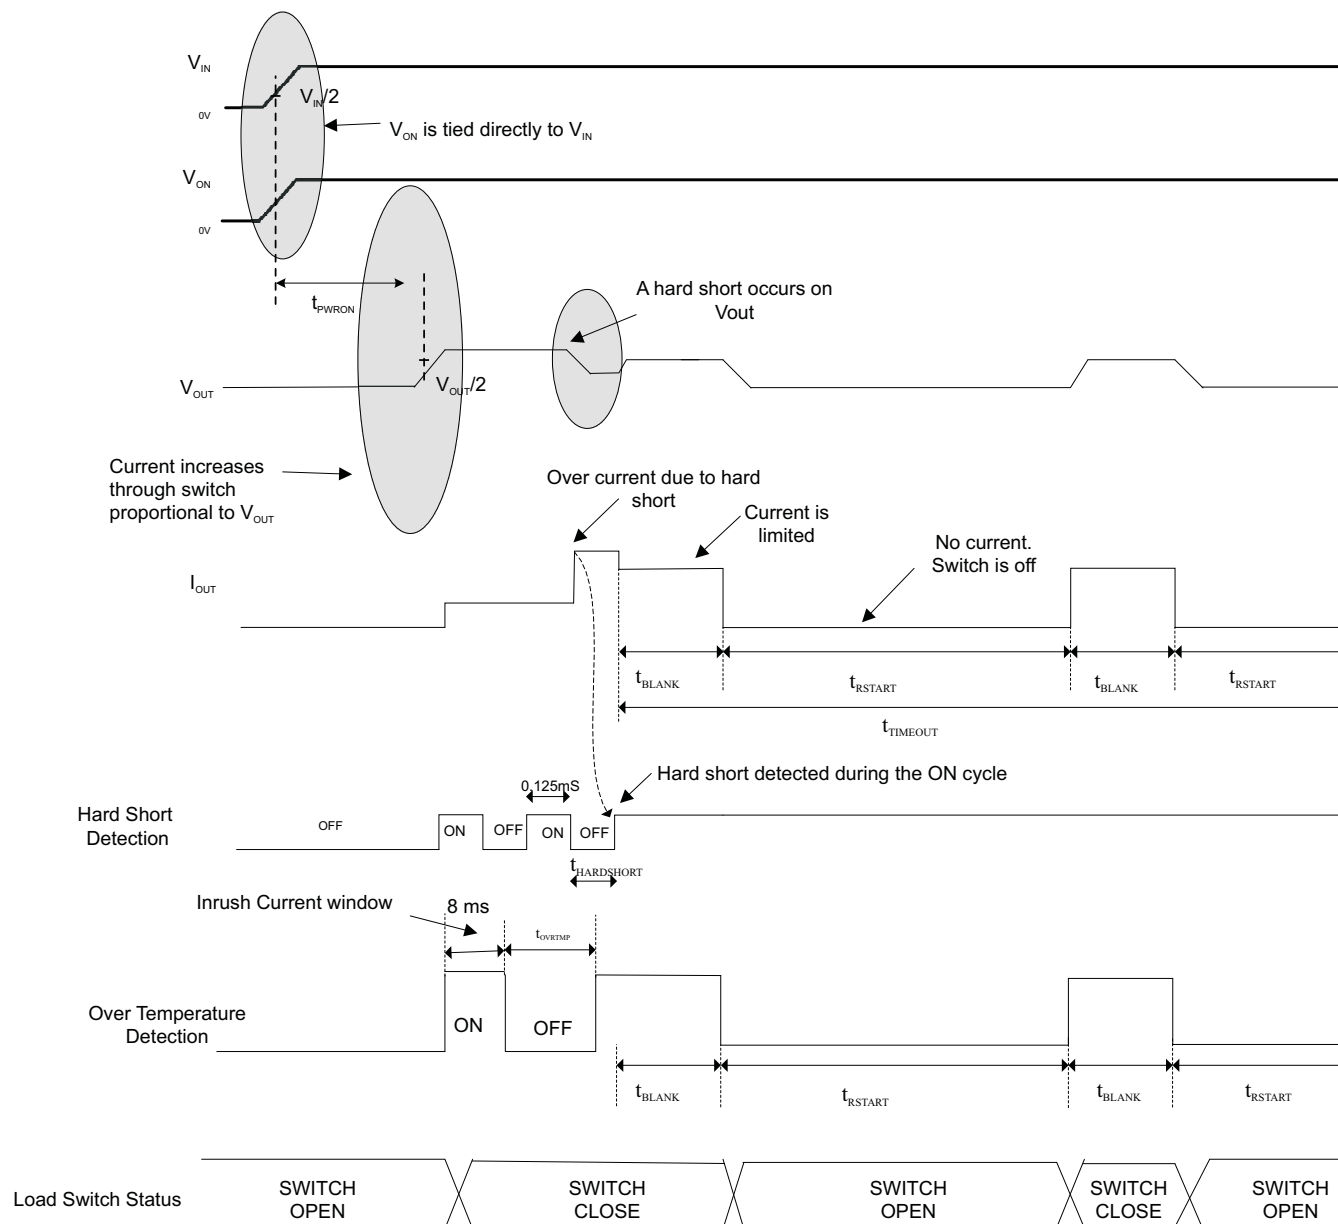


**Figure 27. Hard-Short Detection**



## Moderate Over-Current Detection

The moderate over-current detection circuit is active every 64 ms for a period of 0.5 ms. A moderate over-current condition is triggered when the output current of the switch exceeds the current limit value and is not yet into hard short condition. The switch then goes into current-limiting mode.

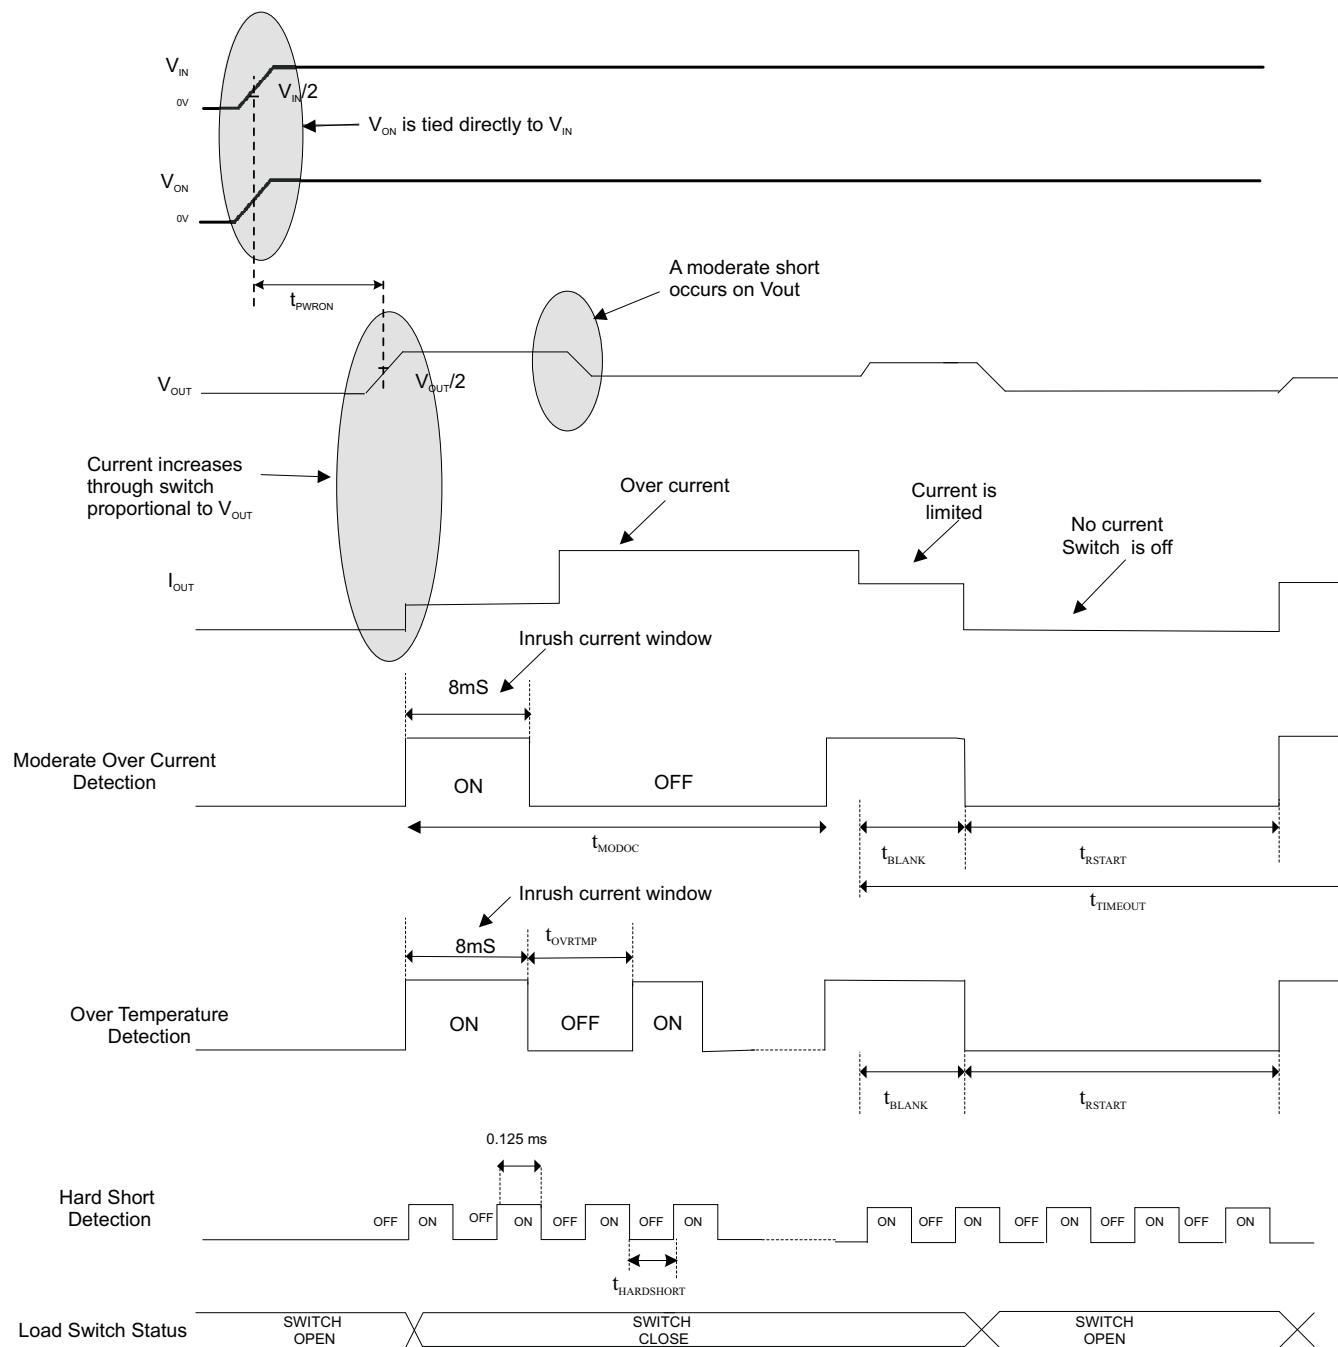

NOTE: The over current does n't cause the temperature to go above 140°C here.

**Figure 28. Moderate Over-Current Detection**

### Current Limiting Mode

When an over-current condition (moderate or a hard short) is detected, the TPS22946 operates in a constant-current mode to prohibit excessive currents from causing damage. TPS22946 has a current limit of 30 mA, 70 mA or 155 mA.

If the constant current condition still persists after 10ms, the device shuts off the switch and pulls the fault signal pin (OC) low. The TPS22946 has an auto-restart feature which turns the switch on again after 70 ms if the ON pin is still active.

### Fault Reporting

When a moderate over-current, hard short or over-temperature condition is detected, OC is set active low to signal a fault condition. OC is an open-drain MOSFET and requires a pullup resistor between  $V_{IN}$  and OC. During shutdown, the pulldown on OC is disabled, reducing current draw from the supply.

### Power-On / Power-Off Sequence

The device is enabled internally only once the hard-short detection circuit is enabled.

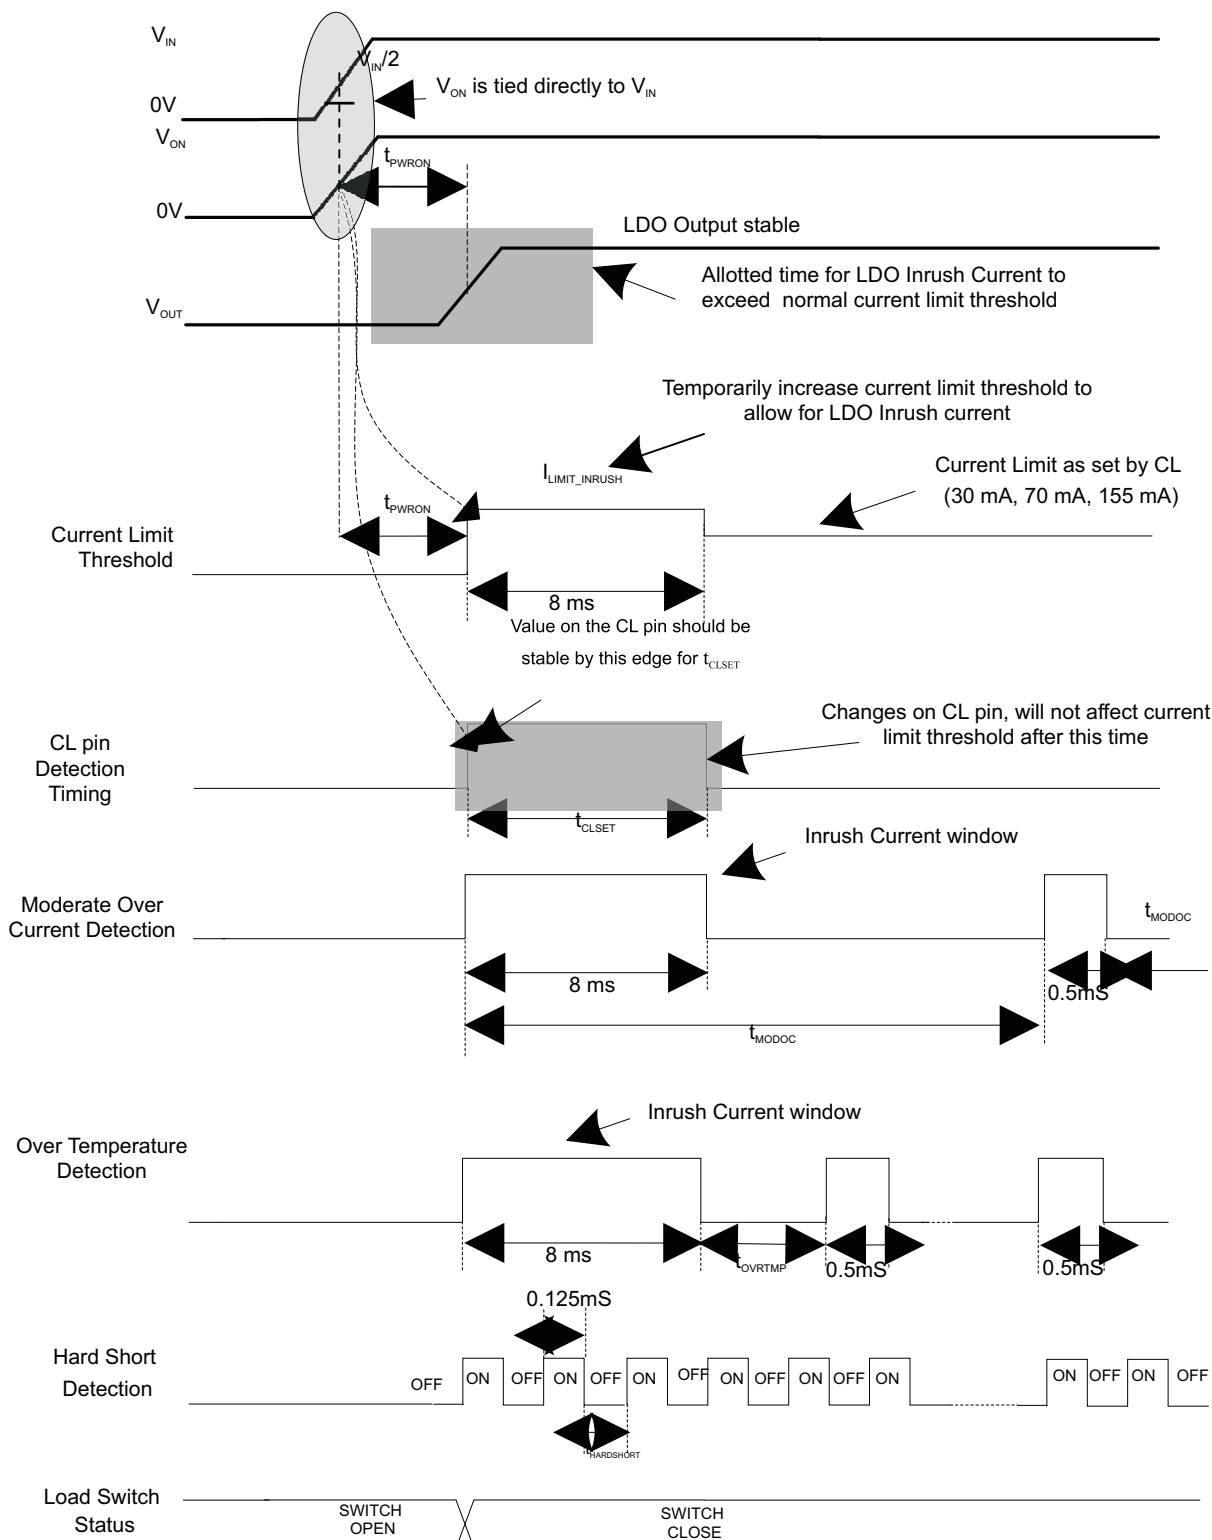



Figure 29. Power-On/Power-Off Sequence Timing

### Automatic Disable in Case of Permanent Over Current

When the switch enters the current-limiting mode due to a hard short condition or a moderate over-current condition, TPS22946 goes through the 10-ms blanking state and the 70-ms auto restart state. If the hard-short condition or the moderate over-current condition persists after 5 s, the part shuts off regardless of the ON signal. The switch is turned on again after a power reset if the ON pin is HIGH.

### Inrush Current Timeout Feature

The inrush current required by the LDO at startup can in some cases exceed the current limit and initiate a blanking (current limiting) condition. TPS22946 provides allowance for this scenario by temporarily increasing the current limit to 435 mA for 8 ms after the load switch is enabled. This timeout is initiated by the positive edge transition on the ON signal.

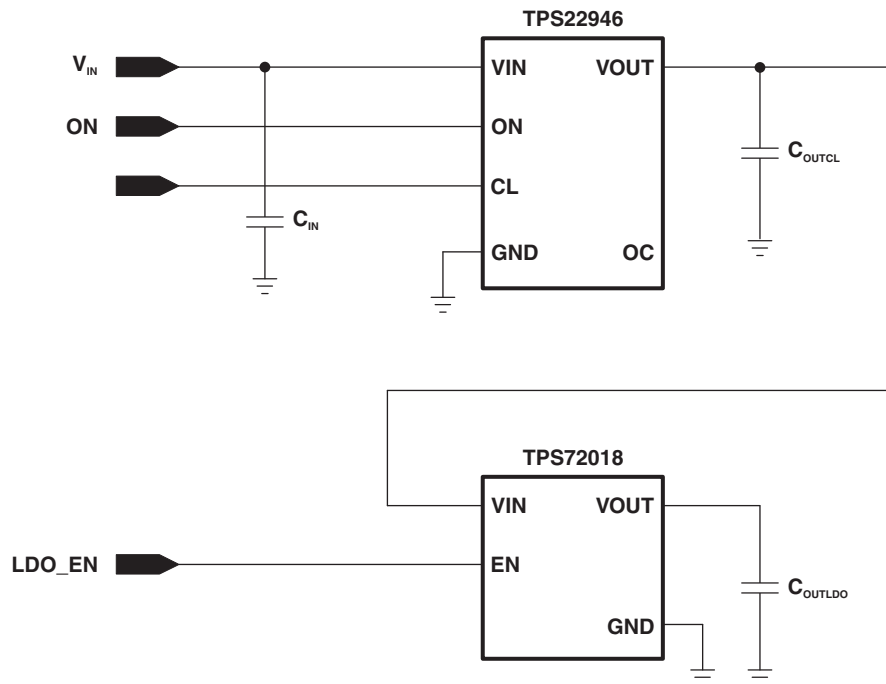

**Figure 30. Inrush Current Timeout Circuit**

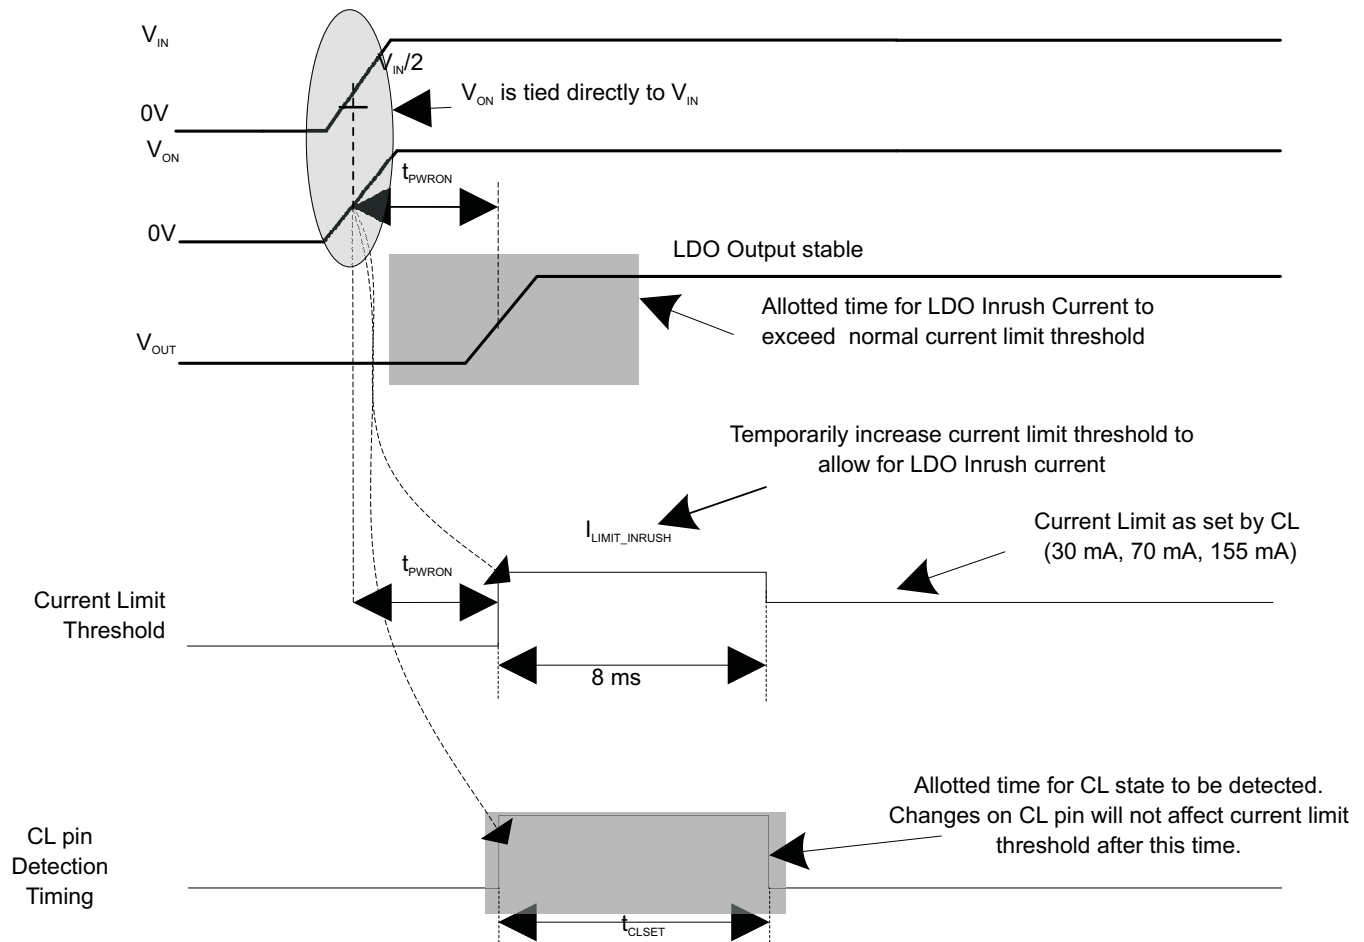


Figure 31. Inrush Current Timeout Timing

## CL Control Pin

The TPS22946 supports three current limits: 30 mA, 70 mA, and 155 mA. The current limit selection is determined by the status of the digital input CL pin, as shown in Table 3. A high impedance, or floating, condition allows the CL pin to support a third state. The TPS22946 monitors the state of the CL pin during start-up from a disabled state, and upon start-up sets the current limit accordingly. When floating the CL pin, keep the total capacitance on the pin less than 100 pF and the resistive loading greater than 10 MΩ to ensure proper operation. Any changes to the state of the CL pin after the start-up operation has completed are ignored until the next start-up cycle.


The CL pin must be driven with logic levels referenced to VIN. The CL pin can be tied high or low on the printed wiring board (PWB) or driven by a general purpose I/O (GPIO), as long as the  $V_{IL}$  and  $V_{IH}$  recommended operating conditions are met.

**Table 3. CL Control Pin**


CL PIN STATUS	CURRENT LIMIT
Logic low <sup>(1)</sup>	70 mA
Float <sup>(2)</sup>	30 mA
Logic high <sup>(1)</sup>	155 mA

(1) Resistance to VCC or GND < 100 Ω

(2) Load on CL: C < 100 pF, R > 10 MΩ

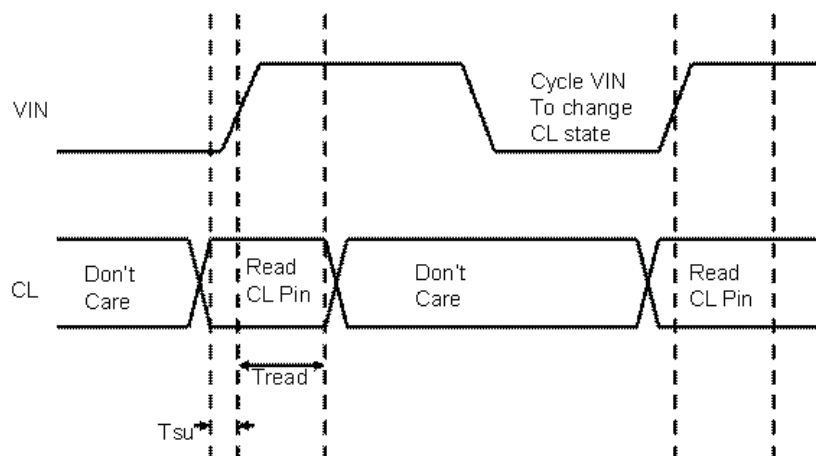

**Figure 32. CL Pin Read Timing When cycling VIN (ON Pin Tied to VIN)**

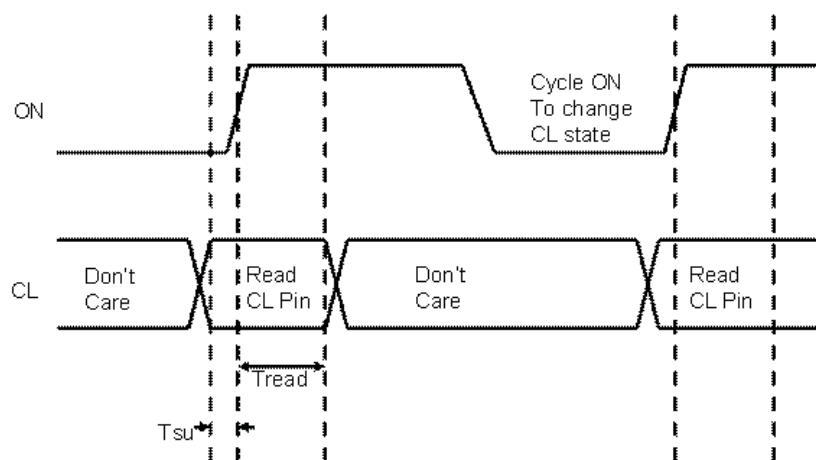

**Figure 33. CL Pin Read Timing Cycling ON Pin (VIN High)**

## Over Temperature Protection

An over temperature condition occurs when the temperature of the part is greater than 140°C. The OC flag will go low to indicate a fault. If the over temperature condition persists for more than 6 seconds, the part times out and shuts OFF. The part has to be enabled by either toggling the ON pin or the VIN pin. If the temperature reduces below 130°C within 5 seconds, the part will start normal operation.

If the temperature is not constantly high above 140°C and is toggling between greater than 140°C and less than 130°C, the internal timeout timer keeps resetting. If this event occurs more than 32 times, it will cause the part to shut OFF. It can be enabled by toggling either the ON pin or the VIN pin.

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
TPS22946YZPR	ACTIVE	DSBGA	YZP	6	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	5H2	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Only one of markings shown within the brackets will appear on the physical device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22946YZPR	DSBGA	YZP	6	3000	180.0	8.4	1.02	1.52	0.63	4.0	8.0	Q1

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22946YZPR	DSBGA	YZP	6	3000	220.0	220.0	34.0

YZP (R-XBGA-N6)

DIE-SIZE BALL GRID ARRAY

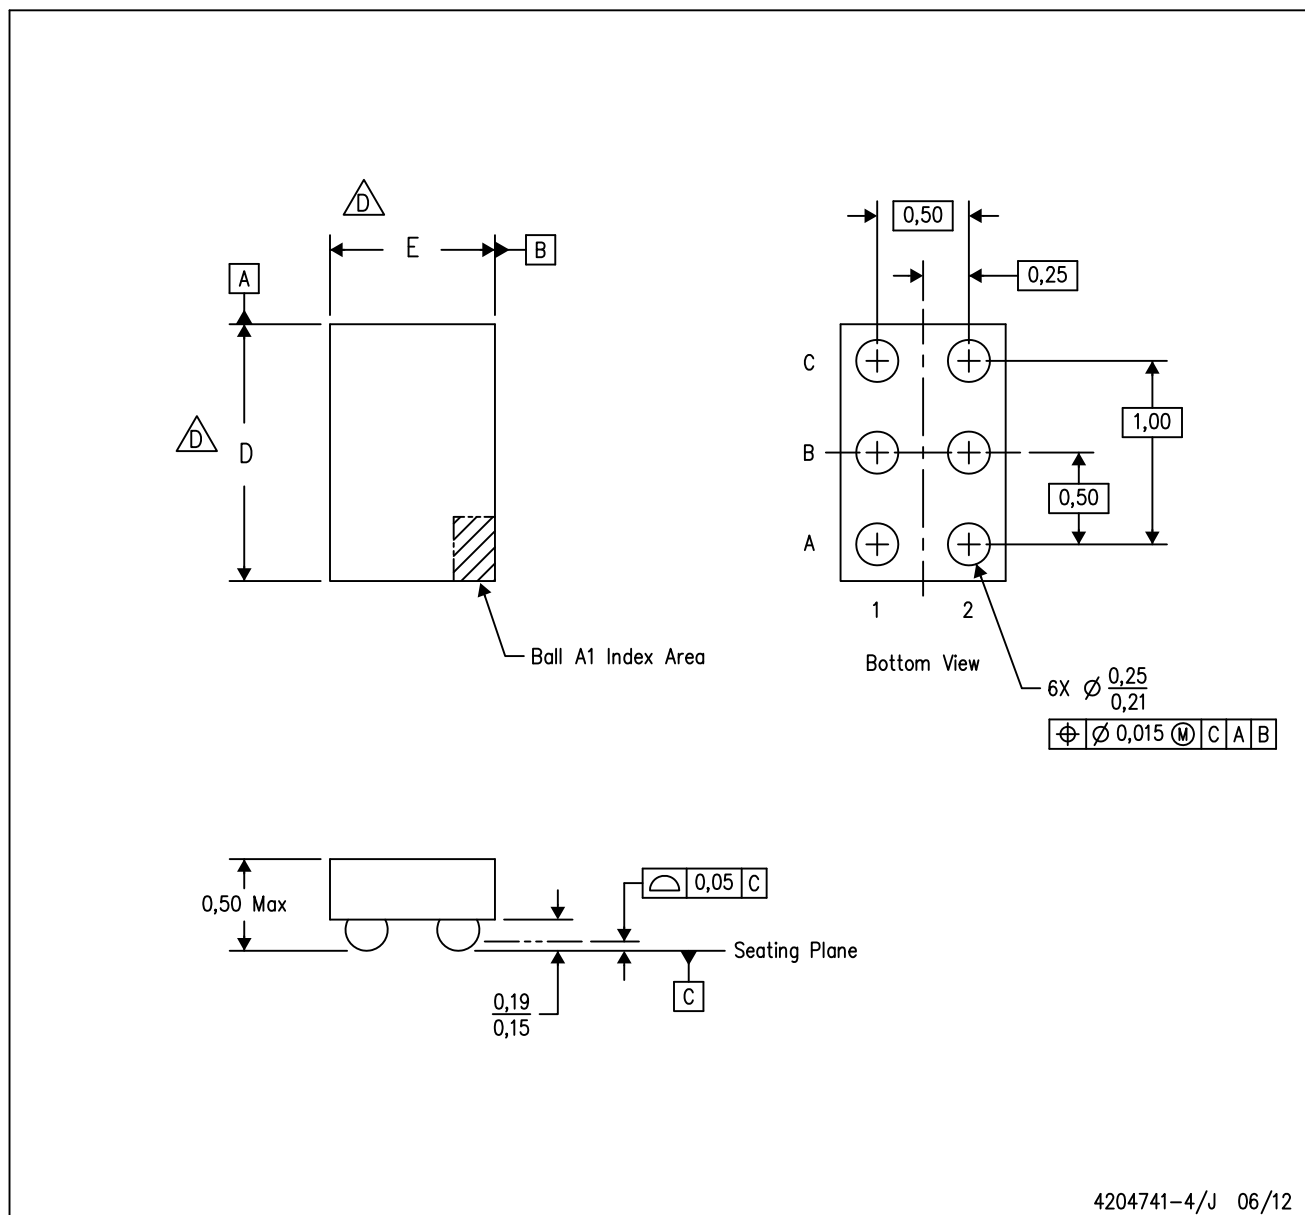

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. NanoFree™ package configuration.
  - The package size (Dimension D and E) of a particular device is specified in the device Product Data Sheet version of this drawing, in case it cannot be found in the product data sheet please contact a local TI representative.
  - E. This package is a Pb-free solder ball design. Refer to the 6 YEP package (drawing 4204725) for tin-lead (SnPb).

NanoFree is a trademark of Texas Instruments.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct      +86 (21) 6401-6692  
Email        amall@ameya360.com  
QQ            800077892  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel            +86 (21) 64016692-8333  
Email        mkt@ameya360.com