

# “High Frequency Ceramic Solutions”

## 869 MHz Low Pass Filter

P/N 0869LP14A090

Detail Specification



Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss
0869LP14A090_	824 - 915	0.6 dB max.	20 dB @ $2 \times f_o$ 15 dB @ $3 \times f_o$	10.9 dB min.

Input Power	Impedance	Operating Temperature Range
3 Watt max	50 $\Omega$	-40 to +85°C


### Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.063 ± .004	0.032 ± .004	0.024 ± .004	.008 ± .004	0.008 ± .004/-0.006	.006 ± ±.004	0.012 ± .004	0.020 ± .002
mm	1.6 ± 0.1	0.80 ± 0.1	0.60 ± 0.1	0.20 ± 0.1	0.20 ± 0.1/-0.15	0.15 ± 0.1	0.30 ± 0.1	0.50 ± 0.05



### Terminal Configuration


No.	Function	No.	Function
1	GND	4	OUT
2	NC	5	GND
3	GND	6	IN



### Mounting Considerations

- Mount these devices with brown mark facing up.
- Line width should be designed to provide 50 $\Omega$  impedanc

- Solder Resist
- Land
- Through-hole ( $\phi$  0.35)

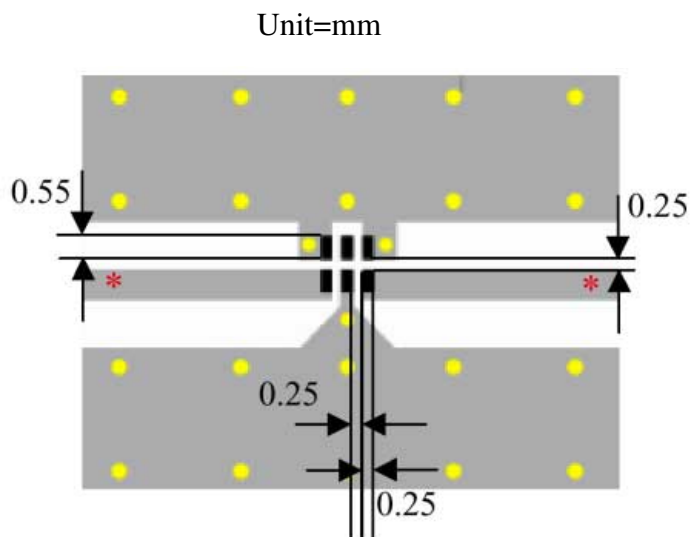

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.


## 869 MHz Low Pass Filter

Detail Specification

P/N 0869LP14A090

Page 2 of 2

Typical Insertion Loss / Return Loss

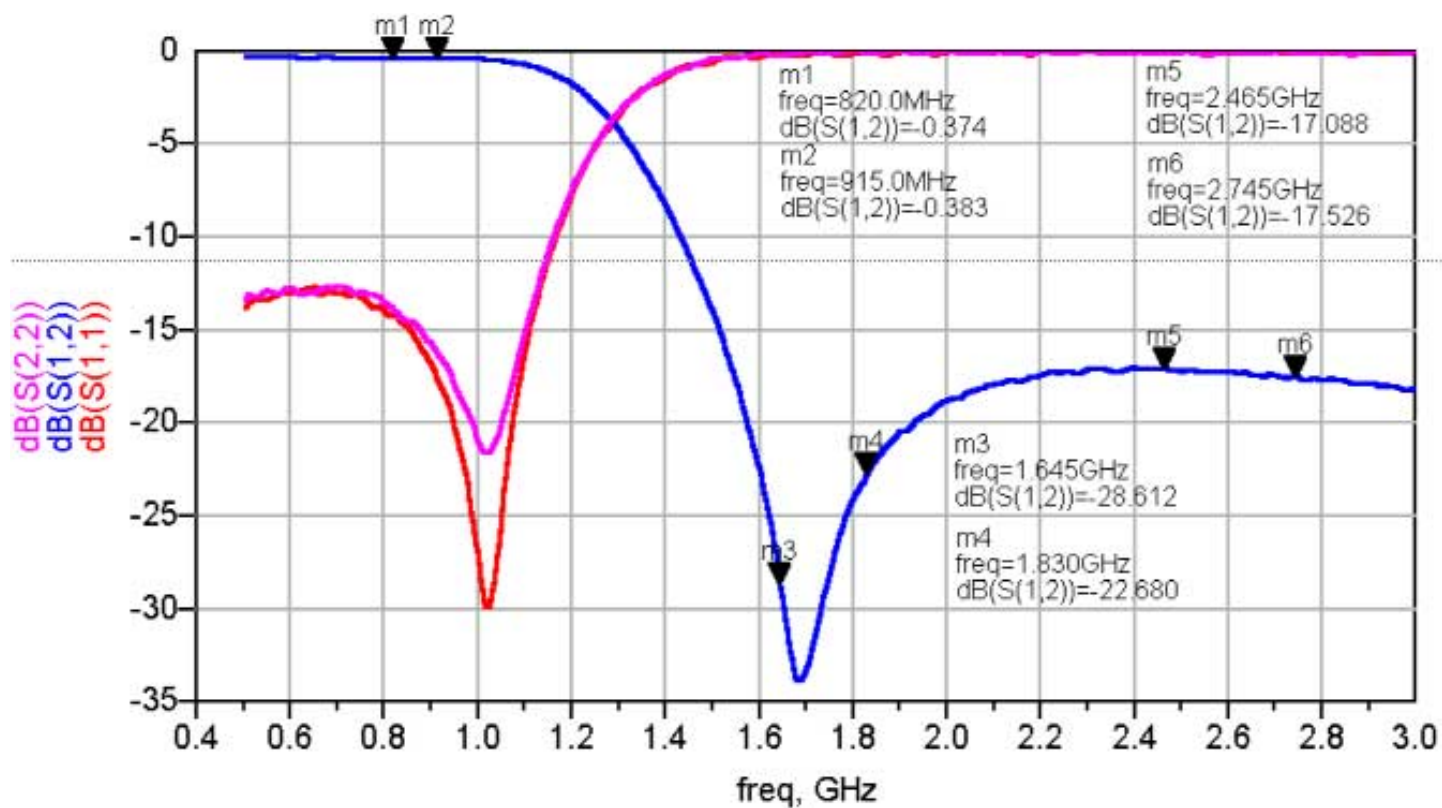

### Delivery

Packaged in embossed tape on 7" reels (4000 / reel)  
Standard delivery is eight weeks or sooner ARO

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)