


LINE ISOLATION STEP DOWN - PLUG IN

(115V to 95V)

- Primary 115VAC, 50/60 Hz., Secondary 95VAC.
- · Provides circuit isolation.
- Electrostatic shield between primary & secondary.
- World wide applications, 50 or 60 Hz. operation, step down (115VAC to 95VAC).
- Designed mainly for Japanese equipment operating in North America.
- · Perfect for operating "Classic" equipment that can not tolerate todays higher line voltages (ie..125VAC input will produce a stress free 105VAC output - at full load - PLUS - isolation and shielding).
- Standard 3-wire, grounded plug (can also be used with adaptors for proper grounding).
- Input (primary) connected to a 5 foot long cord and standard 3-wire, 125V North American plug (NEMA 5-15P).
- Output (secondary) connected to two standard 3-wire, 125V grounded receptacles (NEMA 5-15R).
- · Features include ventilated black steel case, rocker lighted on-off switch & fuse protected output.
- Remember These units do NOT convert line frequency

Part No.	Capacity	# of Outlets	Dimensions (Inches)		
	VA		Length	Width	Height
1790	250	2	6.00	6.75	4.75
179D	500	2	6.00	8.25	4.75
179E	750	2	7.00	8.25	5.38
179F	1000	2	7.00	9.75	5.38
179G	1500	2	8.50	9.00	6.75

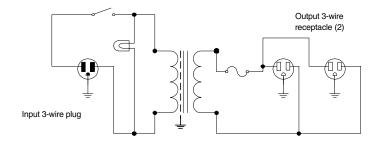

www.hammondmfg.com

# AMEYA360 Components Supply Platform

## **Authorized Distribution Brand:**

























### Website:

Welcome to visit www.ameya360.com

#### Contact Us:

#### Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

#### > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

#### Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com