

POWER TRANSFORMER MOUNT: WORLD SERIES

VPP12-800


Electrical Specifications (@25C)

1. Maximum Power: 10.0VA

2. Input: Series: 230VAC, 50/60Hz; Parallel: 115VAC, 50/60Hz 3. Output: Series1: 12.6V CT@ 0.8A; Parallel2: 6.3V @ 1.6A 4. Voltage Regulation: 25% TYP @ full load to no load

5. Temperature Rise: 30C TYP (45C MAX allowed) 6. Insulation Resistance: $100M\Omega$

7. Hipot: 4000VAC between primary to secondary and windings to core.



Construction:

Dual bobbin construction with an insulated shroud, both made of a high temperature material that exceeds UL flammability requirements.

Safety:

Since the dual bobbin construction effectively reduces capacitance, electrostatic shielding is not required. World Series Transformers are designed and manufactured to meet the following agency approvals:







Agency File:

UL: File E53148, UL 5085-1 and 2 (formerly UL 506), General Purpose. UL: File E65390, UL 5085-1 and 3 (formerly UL1585), Class 2/3.

CSA: File LR 221330. C22.2 NO. 66, General Purpose.

TUV: File R72103639, EN 60950, (IEC950) information Technology Equipment.

A. Dimensions:						Units: In inches		
Α	В	С	D	Е	F	G	Н	
1.25	1.375	0.187	0.200	0.400	1.562	1.875	1.140	

B. PIN DIM.: 0.036 SQ C. WT Lbs.: 0.53

D. Mounting Holes: 0.112 dia. x 2.0

Connections³:

Input: Series - Pin 1 to Pin 6, Jumper Pin 4 to Pin 3


Parallel - Pin 1 to Pin 6, Jumper Pin 1 to Pin 4 and Pin 3 to Pin 6

Output: Series – Pin 7 to Pin 12, Jumper Pin 9 to Pin 10

Parallel - Pin 7 to Pin 12, Jumper Pin 7 to Pin 10 and Pin 9 to Pin 12

RoHS Compliance: Meets the requirements of 2002/95/EC, known as the RoHS initiative.


* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.



Inherently limited. No fusing required. Class 2.

³ Primary and secondary windings are designed to be connected in series or parallel. Winding are not intended to be used independently.



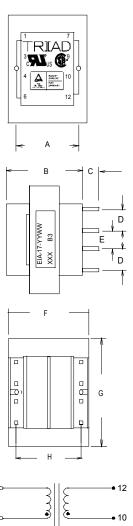



SCHEMATIC

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

Publish Date: November 7, 2012

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com