

4.3" WQVGA Touch Screen LCD Kit



DK-43WQH-1788
For the NXP LPC1788



Highlights

- **SOMDIMM – CPU Module based on SODIMM form factor (Dual Inline Memory Module)**
 - LPC1788 120MHz Cortex-M3 based microcontroller
 - 512KB of Internal FLASH, 96KB of Internal SRAM, 4KB of Internal EEPROM 8MB of External SDRAM
 - 10/100 Ethernet PHY
 - Mini-JTAG Debug Connector
- **CARRIER – Generic Carrier Board for CPU and LCD Modules**
 - 200-pin SOMDIMM Socket, supporting various processor modules
 - 10/100 Ethernet Port, USB Host and Device ports
 - One CAN port (Male DB9), One RS-232 port (Male DB9), External I2C interface
 - 3-axis Digital Accelerometer & Temperature Sensor
 - Real-time Clock with SuperCap backup
 - TFT interface for Graphics LCD displays up to 1024x768 resolution, 18-bit color
 - Flexible Power Supply input can be wall supply or 5V USB
 - 2-Channel I²S Audio Codec
 - Redpine and Roving Networks Wi-Fi compatible
- **LCDCARRIER**
 - 4.3"WQVGA Display (480 x 272) with Touch Screen Interface
- **Software Included**
 - FreeRTOS Operating System
 - uEZ[®] Rapid Development Platform
 - Drivers and APIs with documentation
- Supplied with easy-to-use application documents for all hardware and software
- Platform is based on a modular design for maximum flexibility
- Additional CPU DIMM and LCD Carrier boards under development



The DK-43WQH-1788 is optimized to save development time in typical embedded control applications. The modular format uses a base Carrier Board, a core CPU SOMDIMM and an LCD Carrier Board. The base Carrier Board includes expansion connectors for added flexibility and a range of configurations. FDI offers low cost customization services for customer specific hardware, software or packaging applications at volumes of 500 units or more.



SOMDIMM-LPC1788 Description

The SOMDIMM-LPC1788 includes an NXP LPC1788 Cortex-M3 based microcontroller running the open source μ EZ[®] +FreeRTOS software platform. The LPC1788 has 512KB of internal Flash memory, 96KB of internal SRAM, a 10/100 Ethernet Media Access Controller (MAC), a USB full speed device/host/OTG controller, four UARTs, two CAN channels and a collection of serial communications interfaces. The SOMDIMM-LPC1788 also includes 8MB of external SDRAM.


Actual PCB dimensions are 2.66" x 1.89"

Software Included

μ EZ[®] (pronounced Muse) is an open source rapid development platform that supplies application developers with an extensive library of open source software, drivers, and processor support - all under a common framework. μ EZ[®] allows companies to focus on innovation and their value-added applications while minimizing development time and maximizing software reuse.

The diagram below shows a typical embedded application stack. The μ EZ[®] components comprise three primary categories to simplify embedded application development:

- Operating System Abstraction Layer (μ EZ[®] OSAL)
- Sub-system drivers (ex: μ EZ[®] TCP/IP, μ EZ[®] USB, μ EZ[®] Driver)
- Hardware Abstraction Layer (μ EZ[®] HAL)

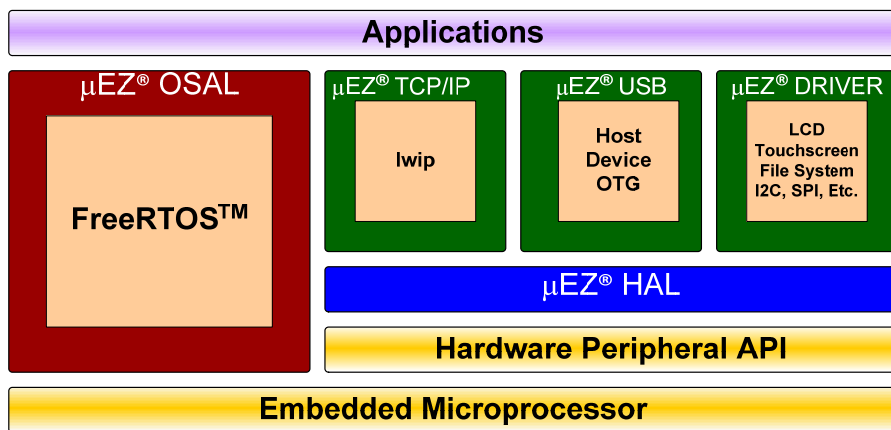

Ordering Information

Part Number: DK-43WQH-LPC1788

Suggested Resale Price: \$475.00(USD)

Order Online at: www.teamfdi.com

Warranty: 30-day money back guarantee

Phone 256-883-1240

Fax 256-883-1241

sales@teamfdi.com

www.teamfdi.com

Kit Contents:

- SOMDIMM-LPC1788 Board
- CARRIER Board
- LCD CARRIER Board, Hitachi 4.3" WQVGA LCD Touch Screen
- 5VDC, 2.3A Power Supply, USB and Ethernet Cables
- Segger JTAG Debugger with cables

Download Users Manual, documents, schematics, and software examples at:

www.teamfdi.com/DK-43WQH-1788

FDI *Future Designs, Inc.*
Your Development Partner

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com