


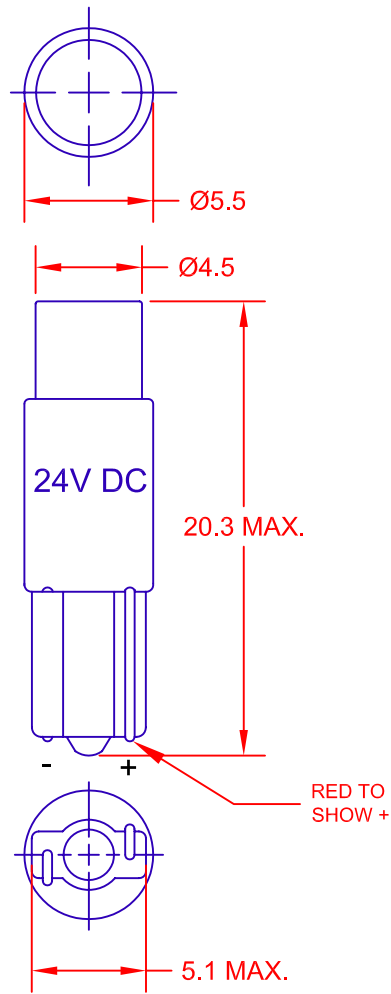

NOTES:

1. LED includes integrated diode for reverse voltage protection.
2. LED includes integrated resistor for current limiting.

OPERATING TEMPERATURE RANGE	-30°C to +85°C
STORAGE TEMPERATURE RANGE	-40° to +100°C

TYPICAL ELECTRICAL & OPTICAL OPERATING CHARACTERISTICS

(Ta = 25 degree C)

PART NUMBER	EMITTING COLOR	AMPERAGE mA	VOLTAGE Vdc	LUMENS	DOMINANT WAVELENGTH	VIEWING ANGLE DEGREES
LE-0509-01R	RED	15mA	24.0	1.00	630nm	95
LE-0509-01Y	YELLOW	15mA	24.0	1.00	595nm	95
LE-0509-01G	GREEN	15mA	24.0	2.00	525nm	95
LE-0509-01B	BLUE	15mA	24.0	1.00	470nm	95
LE-0509-01W	9000°K WHITE	15mA	24.0	2.00	x = 0.30 y = 0.29	95

			METRIC THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0.20 ANGLE +/- 0		JKL COMPONENTS CORPORATION			
					TITLE		T-1 3/4 WEDGE BASE 24 VOLT LED			
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	DRAWN BY	APPV'D BY DATE	SIZE	FSCM NO.	DRAWING NO.	LE-0509-01		
			L. WENGSTROM	L.R. 5/16/10	A	55335				
			- CAD DRAWING -		SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET	
			MANUAL REVISIONS NOT PERMITTED		NONE	7/3/06	6/16/10	C	1 OF 1	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com