

**2 Mb / 4 Mb Single Operating Voltage Serial Flash Memory
With 104 MHz Dual or 100MHz Quad-Output SPI Bus Interface****FEATURES**

- **Single Power Supply Operation**
 - Low voltage range: 2.3 V - 3.6 V
- **Memory Organization**
 - IS25LQ020: 256K x 8 (2 Mbit)
 - IS25LQ040: 512K x 8 (4 Mbit)
- **Cost Effective Sector/Block Architecture**
 - 2Mb / 4Mb : Uniform 4KByte sectors / sixteen uniform 64KByte blocks
- **Serial Peripheral Interface (SPI) Compatible**
 - Supports single-, dual- or quad-output
 - Supports SPI Modes 0 and 3
 - Maximum 33 MHz clock rate for normal read
 - Maximum 104 MHz clock rate for fast read
 - Maximum 208MHz clock rate equivalent Dual SPI
 - Maximum 400MHz clock rate equivalent Quad SPI
- **Byte Program Operation**
 - Typical 10 us/Byte
- **Page Program (up to 256 Bytes) Operation**
 - Maximum 0.7ms per page program
- **Sector, Block or Chip Erase Operation**
 - Sector Erase (4KB)→150ms (Typ)
 - Block Erase (64KB)→500ms (Typ)
 - Chip Erase →0.5s (2Mb)
 - Chip Erase → 1s (4Mb)

GENERAL DESCRIPTION

The IS25LQ020/040 is 2 Mbit / 4 Mbit Serial Peripheral Interface (SPI) Flash memories, providing single-, dual or quad-output. The devices are designed to support a 33 MHz fclock rate in normal read mode, and 104 MHz in fast read (Quad output is 100MHz), the fastest in the industry. The devices use a single low voltage power supply, ranging from 2.3 Volt to 3.6 Volt, to perform read, erase and program operations. The devices can be programmed in standard EPROM programmers.

The IS25LQ020/040 are accessed through a 4-wire SPI Interface consisting of Serial Data Input/Output (SI), Serial Data Output (SO), Serial Clock (SCK), and Chip Enable (CE#) pins. The devices support page program mode, where 1 to 256 bytes data can be programmed into the memory in one program operation. These devices are divided into uniform 4 KByte sectors or uniform 64 KByte blocks.

PRELIMINARY DATASHEET


- **Low Power Consumption**
 - Max 12 mA active read current
 - Max 20 mA program/erase current
 - Max 50 uA standby current
- **Hardware Write Protection**
 - Protect and unprotect the device from write operation by Write Protect (WP#) Pin
- **Software Write Protection**
 - The Block Protect (BP3, BP2, BP1, BP0) bits allow partial or entire memory to be configured as read-only
- **High Product Endurance**
 - Guaranteed 100,000 program/erase cycles per single sector
 - Minimum 20 years data retention
- **Industrial Standard Pin-out and Package**
 - 8-pin SOIC 208mil
 - 8-pin SOIC 150mil
 - 8-pin VVSOP 150mil
 - 8-pin WSON (5x6mm)
 - 8-pin USON (2x3mm)
 - KGD (Call Factory)
 - Lead-free (Pb-free) package
 - Automotive Temperature Ranges Available
- **Additional 256-byte Security information one-time programmable (OTP) area**
- **Special protect function**
 - Safe guard function (Appendix 1)
 - Sector unlock function (Appendix




IS25LQ020/040

The IS25LQ020/040 are offered in 8-pin SOIC 208mil, 8-pin VVSOP, 8-pin WSON and 8-pin USON.


CONNECTION DIAGRAMS

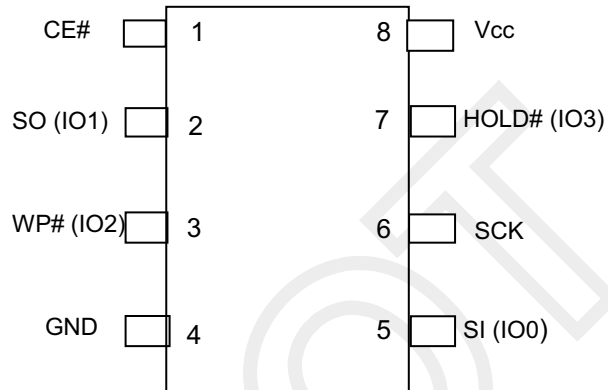

8-Pin SOIC/VVSOP

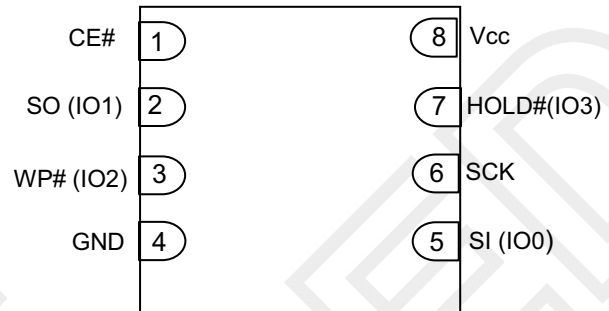

8-Pin WSON

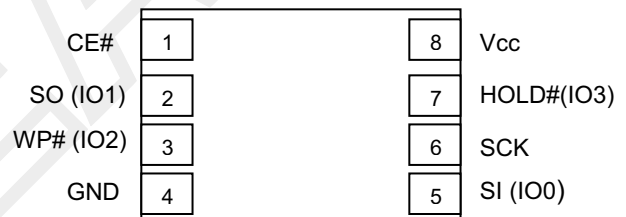

8-Pin USON

**PIN DESCRIPTIONS**

SYMBOL	TYPE	DESCRIPTION
CE#	INPUT	Chip Enable: CE# low activates the devices internal circuitries for device operation. CE# high deselects the devices and switches into standby mode to reduce the power consumption. When a device is not selected, data will not be accepted via the serial input pin (SI), and the serial output pin (SO) will remain in a high impedance state.
SCK	INPUT	Serial Data Clock
SI (IO0)	INPUT/OUTPUT	Serial Data Input/Output
SO (IO1)	INPUT/OUTPUT	Serial Data Input/Output
GND		Ground
Vcc		Device Power Supply
WP# (IO2)	INPUT/OUTPUT	Write Protect/Serial Data Output: A hardware program/erase protection for all or part of a memory array. When the WP# pin is low, memory array write-protection depends on the setting of BP3, BP2, BP1 and BP0 bits in the Status Register. When the WP# is high, the status register are not write-protected. When the QE bit of is set "1", the /WP pin (Hardware Write Protect) function is not available since this pin is used for IO2
HOLD# (IO3)	INPUT/OUTPUT	Hold: Pause serial communication by the master device without resetting the serial sequence. When the QE bit of Status Register is set for "1", the function is Serial Data Input & Output (for 4xI/O read mode)

**ORDERING INFORMATION:**

Density	Frequency (MHz)	Order Part Number	Package
2M	104	IS25LQ020-JNLE	8-pin SOIC 150mil
		IS25LQ020-JBLE	8-pin SOIC 208mil
		IS25LQ020-JVLE	8-pin VVSOP 150mil
		IS25LQ020-JKLE	8-pin WSON (5x6mm)
		IS25LQ020-JULE	8-pin USON (2x3mm)
		IS25LQ020-JNLA*	8-pin SOIC 150mil (Call Factory)
		IS25LQ020-JBLA*	8-pin SOIC 208mil (Call Factory)
		IS25LQ020-JVLA*	8-pin VVSOP 150mil (Call Factory)
		IS25LQ020-JKLA*	8-pin WSON (5x6mm) (Call Factory)
		IS25LQ020-JULA*	8-pin USON (2x3mm) (Call Factory)
		IS25LQ020-JWLE	KGD (Call Factory)
4M	104	IS25LQ040-JNLE	8-pin SOIC 150mil
		IS25LQ040-JBLE	8-pin SOIC 208mil
		IS25LQ040-JVLE	8-pin VVSOP 150mil
		IS25LQ040-JKLE	8-pin WSON (5x6mm)
		IS25LQ040-JULE	8-pin USON (2x3mm)
		IS25LQ040-JNLA*	8-pin SOIC 150mil (Call Factory)
		IS25LQ040-JBLA*	8-pin SOIC 208mil (Call Factory)
		IS25LQ040-JVLA*	8-pin VVSOP 150mil (Call Factory)
		IS25LQ040-JKLA*	8-pin WSON (5x6mm) (Call Factory)
		IS25LQ040-JULA*	8-pin USON (2x3mm) (Call Factory)
		IS25LQ040-JWLE	KGD (Call Factory)

A* = A1, A2, A3, Automotive Temperature Ranges

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com