

DATASHEET

1206 Package Chip Infrared LED IR15-21C/TR8



Features

- Small double-end package
- High reliability
- Low forward voltage
- Good spectral matching to Si photodetector
- Pb free
- The product itself will remain within RoHS compliant version.

Descriptions

IR15-21C/TR8 is an infrared emitting diode in miniature top view flat SMD package and it is molded in a water clear plastic. The device is spectrally matched with silicon photodiode and phototransistor.

Applications

- PCB mounted infrared sensor
- Infrared emitting for miniature light barrier
- Floppy disk drive
- Optoelectronic switch
- Smoke detector

Device Selection Guide

Part Category	Chip Material	Lens Color	
IR	GaAlAs	Water Clear	

1

Revision

www.everlight.com

Release Date: 2013-07-05 13:36:07.0


Expired Period: Forever


LifecyclePhase: 正式發行

: 2



Package Dimensions

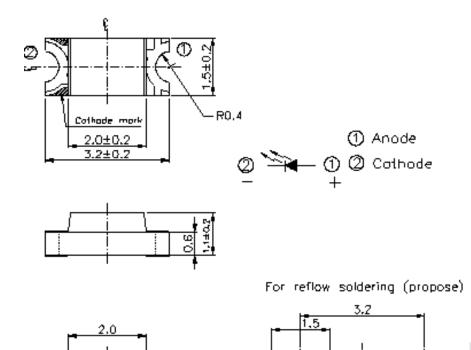



2.Tolerances unless dimensions ±0.1mm

2

Revision

: 2

www.everlight.com

Release Date:2013-07-05 13:36:07.0



Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Units
Continuous Forward Current	I_{F}	65	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{opr}	-25~ +85	
Storage Temperature	T_{stg}	-40 ~ +85	
Soldering Temperature *1	T_{sol}	260	
Power Dissipation at(or below) 25 Free Air Temperature	P _d	130	mW

Notes: *1: Soldering time 5 seconds.

Electro-Optical Characteristics (Ta=25)

Electro Optical Characteristics (14 2c)							
Parameter	Symbol	Condition	Min.	Typ.	Max.	Units	
Radiant Intensity	I_{E}	$I_F=20mA$	0.2	0.8		mW/sr	
Peak Wavelength	p	I _F =20mA	1	940	 \	nm	
Spectral Bandwidth		I _F =20mA		45		nm	
Forward Voltage	V_{F}	I _F =20mA	1	1.2	1.5	V	
Reverse Current	I_R	V _R =5V	-		10	μA	
View Angle	2 1/2	I _F =20mA	e	160		deg	

3

Revision

: 2

www.everlight.com

Release Date:2013-07-05 13:36:07.0

Copyright © 2013, Everlight All Rights Reserved. Release Date :6/24/2013. Issue No:DIR-0000958 Rev 2

LifecyclePhase: Expired Period: Forever



Typical Electro-Optical Characteristics Curves

Fig.1 Forward Current vs.

Ambient Temperature




Fig.3 Forward Current vs. Forward Voltage




Fig.2 Spectral Distribution





Fig.5 Relative Intensity vs.

Forward Current



Copyright © 2013, Everlight All Rights Reserved. Release Date :6/24/2013. Issue No:DIR-0000958 Rev 2

www.everlight.com

Revision : 2 LifecyclePhase: Approved Release Date:2013-07-05 13:36:07.0


Expired Period: Forever



Typical Electro-Optical Characteristics Curves

Fig.5 Relative Radiant Intensity vs.

Angular Displacement

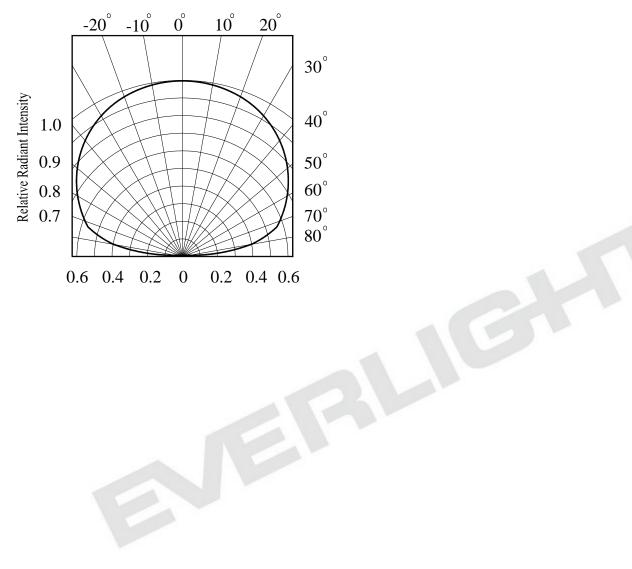

5

Revision

: 2

Copyright © 2013, Everlight All Rights Reserved. Release Date :6/24/2013. Issue No:DIR-0000958 Rev 2

www.everlight.com

Release Date:2013-07-05 13:36:07.0

LifecyclePhase: Expired Period: Forever Expired Period: Forever



Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30 or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30 or less and 60% RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

for 24 hours. Baking treatment: 60±5

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

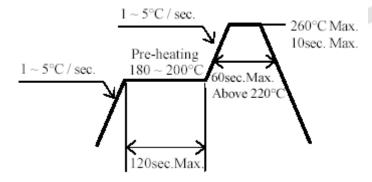

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.

Copyright © 2013, Everlight All Rights Reserved. Release Date: 6/24/2013. Issue No:DIR-0000958

3.4 After soldering, do not warp the circuit board.

6

Revision

www.everlight.com

Release Date: 2013-07-05 13:36:07.0

Rev 2

: 2 LifecyclePhase:




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

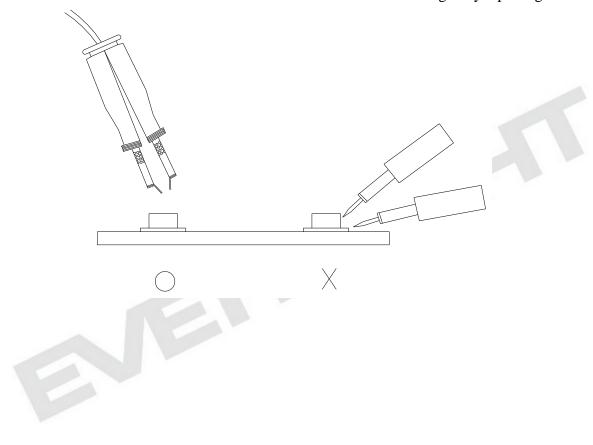

1

Revision

: 2


www.everlight.com

Release Date:2013-07-05 13:36:07.0

LifecyclePhase: Expired Period: Forever Expired Period: Forever




Package Dimensions

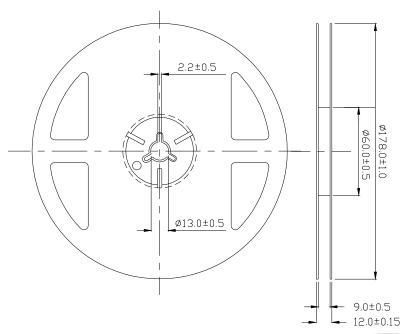

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Carrier Tape Dimensions:(Quantity: 2000 PCS per reel)

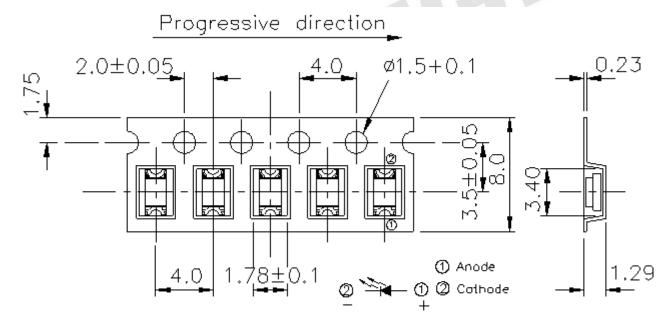

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

8

Copyright © 2013, Everlight All Rights Reserved. Release Date :6/24/2013. Issue No:DIR-0000958 Rev 2


www.everlight.com

Revision : 2 LifecyclePhase: E式發行 Release Date:2013-07-05 13:36:07.0

Expired Period: Forever



Label Form Specification



CPN: Customer's Production Number

P/N: Production Number **QTY**: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No. 6-8, Zhonghua Rd., Shulin Dist., New Taipei City 23860, Taiwan

Tel: 886-2-2685-6688

Fax: 886-2685-2699, 6897 http://www.everlight.com

9

Revision

Copyright © 2013, Everlight All Rights Reserved. Release Date :6/24/2013. Issue No:DIR-0000958 Rev 2 www.everlight.com

Release Date: 2013-07-05 13:36:07.0

Expired Period: Forever

: 2 LifecyclePhase: Approved

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com