

Features

- 600V half-bridge high- and low-side gate driver
- Integrated programmable oscillator
- 15.6V voltage clamp on VCC
- Micro-power startup current
- Programmable preheat frequency
- Programmable preheat time
- Programmable run frequency
- Internal frequency dither for EMI reduction
- EOL window comparator and timer
- Fixed dead-time
- Ignition voltage or current limitation
- Integrated non-ZVS protection
- Integrated RDSon over-current protection
- Integrated bootstrap MOSFET
- Excellent latch immunity on all inputs & outputs
- Integrated ESD protection on all pins


Typical Application

- Fluorescent Ballast


Product Summary

Topology	Half-Bridge
V _{OFFSET}	600V
V _{OUT}	VCC
IO+ & IO- (typical)	180mA & 260mA
Dead-time (typical)	1.8μs

Package Options

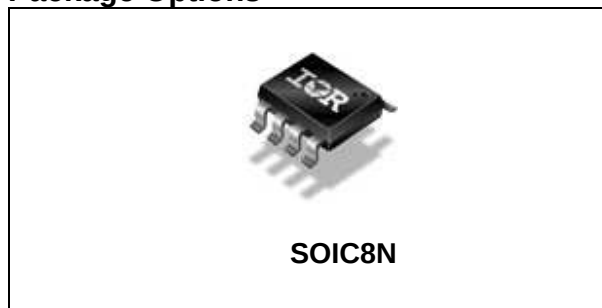

Typical Application Block Diagram

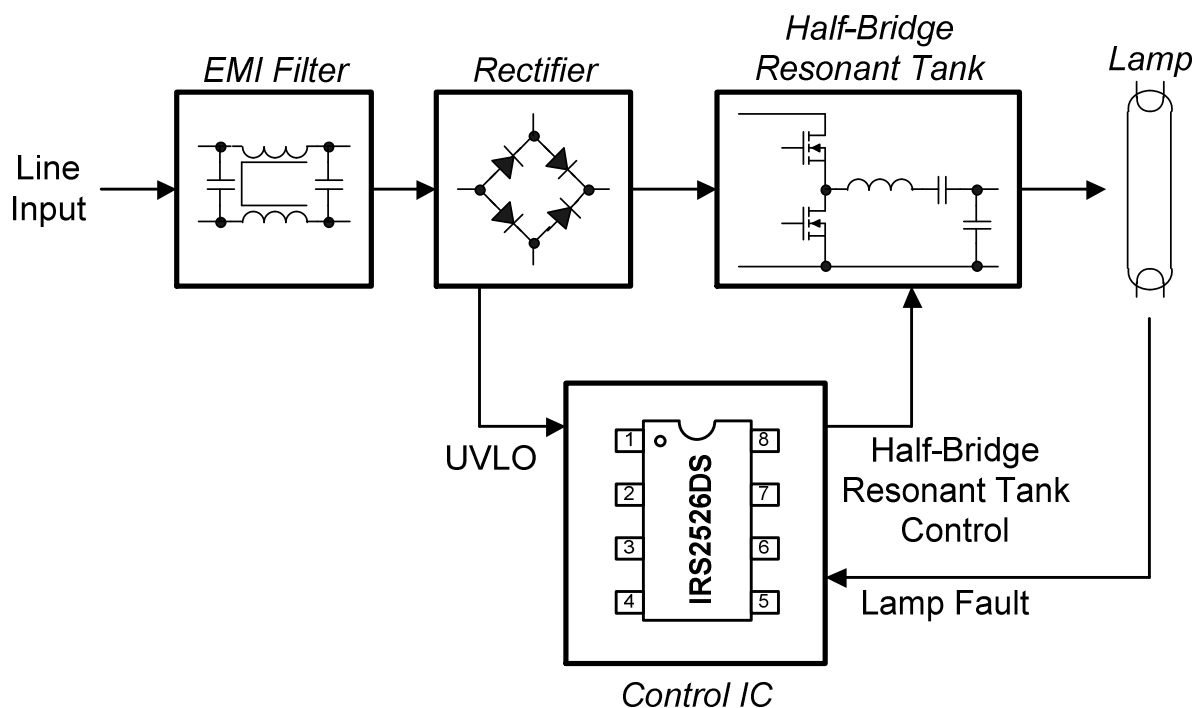

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com