

HMIC™ Silicon PIN Diode Switches

V6

Features

- ◆ Broad Bandwidth
- ◆ Specified from 50MHz to 20GHz
- ◆ Usable from 50MHz to 26.5GHz
- ◆ Lower Insertion Loss / Higher Isolation than pHEMT
- ◆ Rugged
- ◆ Fully Monolithic,
- ◆ Glass Encapsulated Construction
- ◆ Up to +33dBm C.W. Power Handling
- ◆ RoHS Compliant

Description


The MASW-001100-1190, MASW-002100-1191 and MASW-003100-1192 are broadband monolithic switches using series and shunt connected silicon PIN diodes. They are designed for use as 2W, high performance switches in applications up to 26.5GHz. They provide performance levels superior to those realized by hybrid MIC designs incorporating beamlead and PIN chip diodes that require chip and wire assembly.

These switches are fabricated using M/A-COM's patented HMIC™ (Heterolithic Microwave Integrated Circuit) process, US Patent 5,268,310. This process allows the incorporation of silicon pedestals that form series and shunt diodes or vias by imbedding them in low loss, low dispersion glass. By using small spacing between elements, this combination of silicon and glass gives HMIC devices low loss and high isolation performance through low millimeter frequencies.



Large bond pads facilitate the use of low inductance ribbon leads, while gold backside metallization allows for manual or automatic chip bonding via 80/20, AuSn solder or conductive Ag epoxy.

| Parameter | Absolute Maximum |
|-------------------------|------------------|
| Operating Temperature | -65°C to +125°C |
| Storage Temperature | -65°C to +150°C |
| Junction Temperature | +175°C |
| Applied Reverse Voltage | - 50V |
| RF C.W. Incident Power | +33dBm C.W. |
| Bias Current +25°C | ±20mA |



Max operating Conditions for a Combination of RF Power, D.C. Bias and Temperature:
+33dBm CW @ 15mA (per diode) @+85°C




MASW-001100-1190

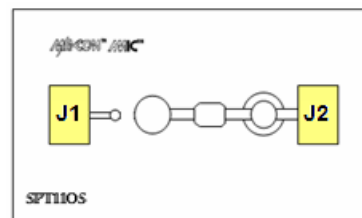

MASW-002100-1191

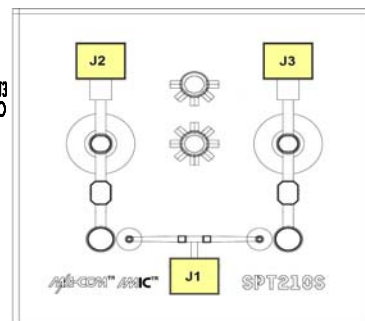

MASW-003100-1192



HMIC™ Silicon PIN Diode Switches

V6

MASW-001100-1190 (SPST)

Electrical Specifications @ $T_A = +25^\circ\text{C}$, 20mA Bias

| Parameter | Frequency | Minimum | Nominal | Maximum | Units |
|------------------------------|-----------|---------|---------|---------|-------|
| Insertion Loss | 6GHz | - | 0.4 | 0.7 | dB |
| | 13GHz | - | 0.5 | 0.9 | dB |
| | 20GHz | - | 0.7 | 1.2 | dB |
| Isolation | 6GHz | 46 | 55 | - | dB |
| | 13GHz | 39 | 47 | - | dB |
| | 20GHz | 34 | 42 | - | dB |
| Input Return Loss | 6GHz | 22 | 31 | - | dB |
| | 13GHz | 15 | 33 | - | dB |
| | 20GHz | 14 | 27 | - | dB |
| Switching Speed ¹ | - | - | 20 | - | ns |
| Voltage Rating ² | - | - | - | 50 | V |
| Signal Compression (500mW) | 1GHz | - | 0.2 | - | dB |

1.) Typical Switching Speed measured from 10 % to 90 % of detected RF signal driven by TTL compatible drivers.

2.) Maximum reverse leakage current in either the shunt or series PIN diodes shall be 10mA maximum at -50 volts.

MASW-002100-1191 (SPDT)

Electrical Specifications @ $T_A = +25^\circ\text{C}$, 20mA Bias

| Parameter | Frequency | Minimum | Nominal | Maximum | Units |
|------------------------------|-----------|---------|---------|---------|-------|
| Insertion Loss | 6GHz | - | 0.4 | 0.7 | dB |
| | 13GHz | - | 0.5 | 1.0 | dB |
| | 20GHz | - | 0.7 | 1.2 | dB |
| Isolation | 6GHz | 48 | 63 | - | dB |
| | 13GHz | 40 | 50 | - | dB |
| | 20GHz | 34 | 42 | - | dB |
| Input Return Loss | 6GHz | 20 | 27 | - | dB |
| | 13GHz | 18 | 25 | - | dB |
| | 20GHz | 15 | 25 | - | dB |
| Switching Speed ¹ | - | - | 20 | - | ns |
| Voltage Rating ² | - | - | - | 50 | V |
| Signal Compression (500mW) | 1GHz | - | 0.2 | - | dB |

1.) Typical Switching Speed measured from 10 % to 90 % of detected RF signal driven by TTL compatible drivers.

2.) Maximum reverse leakage current in either the shunt or series PIN diodes shall be 10mA maximum at -50 volts.


MASW-003100-1192 (SP3T)

Electrical Specifications @ $T_A = +25^\circ\text{C}$, 20mA Bias


| Parameter | Frequency | Minimum | Nominal | Maximum | Units |
|------------------------------|-----------|---------|---------|---------|-------|
| Insertion Loss | 6GHz | - | 0.5 | 0.8 | dB |
| | 13GHz | - | 0.7 | 1.1 | dB |
| | 20GHz | - | 0.9 | 1.5 | dB |
| Isolation | 6GHz | 49 | 57 | - | dB |
| | 13GHz | 42 | 48 | - | dB |
| | 20GHz | 33 | 42 | - | dB |
| Input Return Loss | 6GHz | 20 | 24 | - | dB |
| | 13GHz | 14 | 22 | - | dB |
| | 20GHz | 11 | 21 | - | dB |
| Switching Speed ¹ | - | - | 20 | - | ns |
| Voltage Rating ² | - | - | - | 50 | V |
| Signal Compression (500mW) | 1GHz | - | 0.2 | - | dB |

Typical Performance Curves at $T_A = +25^\circ\text{C}$, 20mA Bias Current


**MASW-001100-1190
RETURN LOSS vs. FREQUENCY**

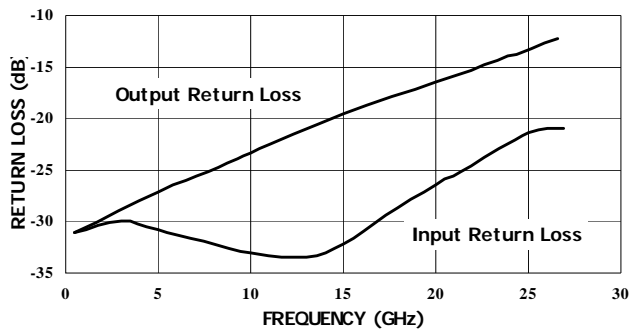


**MASW-001100-1190
INSERTION LOSS vs. FREQUENCY**

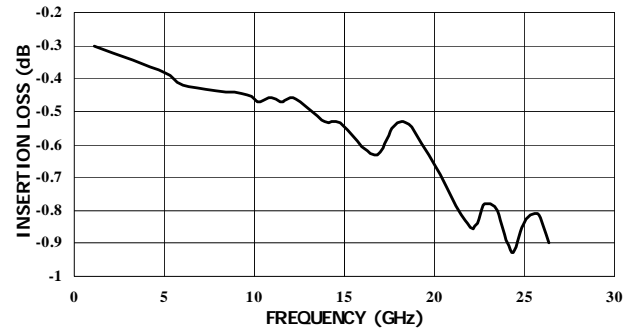


**MASW-002100-1191
RETURN LOSS vs. FREQUENCY**

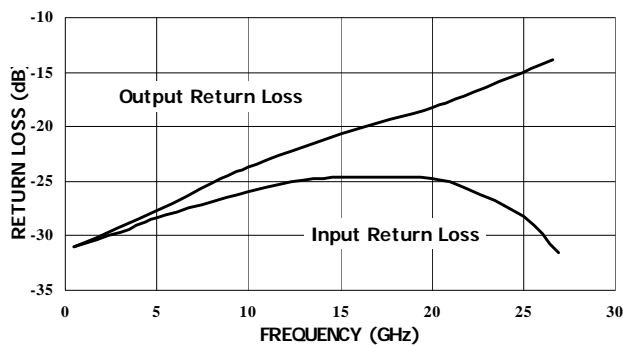


**MASW-002100-1191
INSERTION LOSS vs. FREQUENCY**

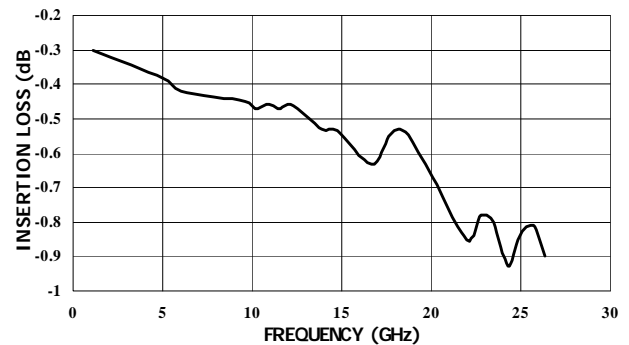

**MASW-003100-1192
RETURN LOSS vs. FREQUENCY**

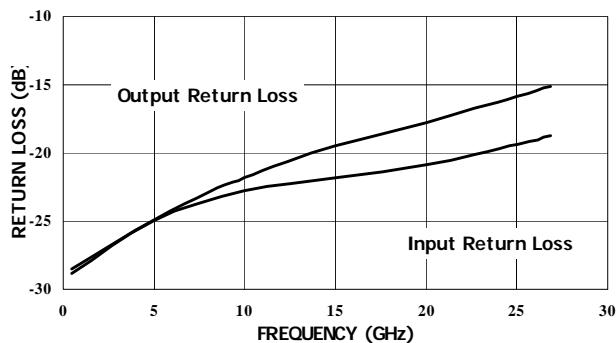


**MASW-003100-1192
INSERTION LOSS vs. FREQUENCY**

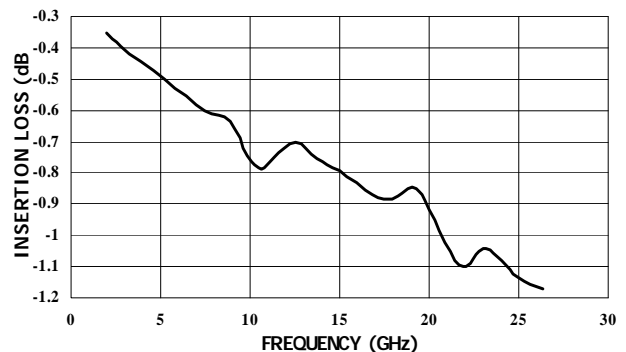


S-Parameters: S-Parameter data for these devices are available upon request.

Typical Performance Curves @ TA = +25°C, 20mA Bias Current


MASW-001100-1190
ISOLATION vs. FREQUENCY

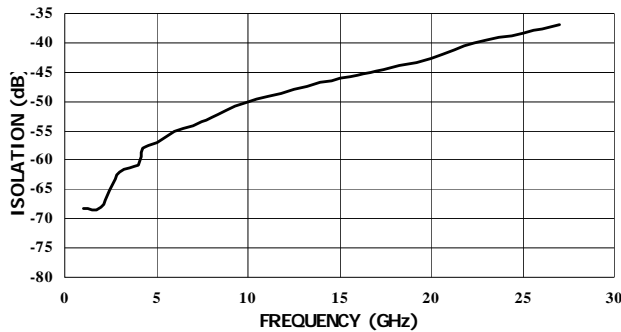


MASW-002100-1191
ISOLATION vs. FREQUENCY

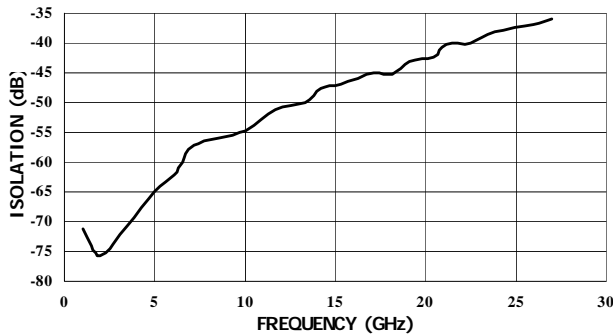


MASW-003100-1192
ISOLATION vs. FREQUENCY

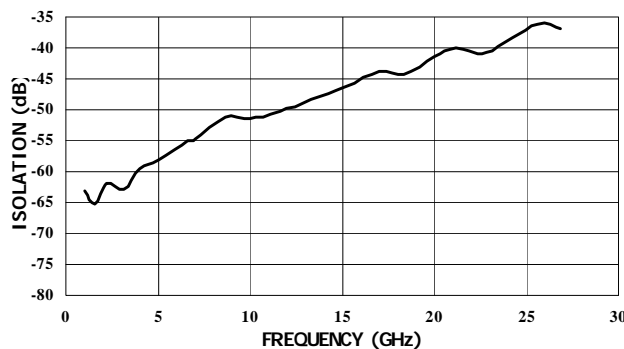


INPUT RETURN LOSS vs. BIAS CURRENT @ 10 GHz

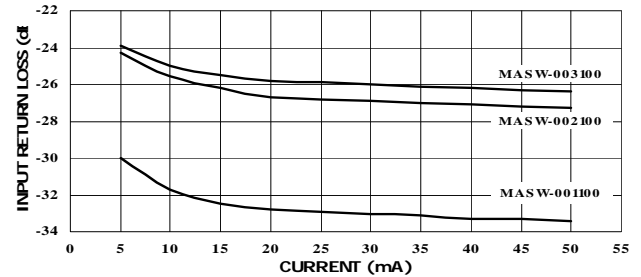


OUTPUT RETURN LOSS vs. BIAS CURRENT @ 10 GHz

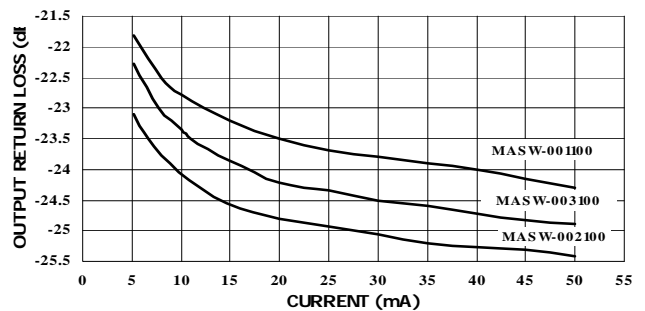

INSERTION LOSS vs. BIAS CURRENT @ 10 GHz

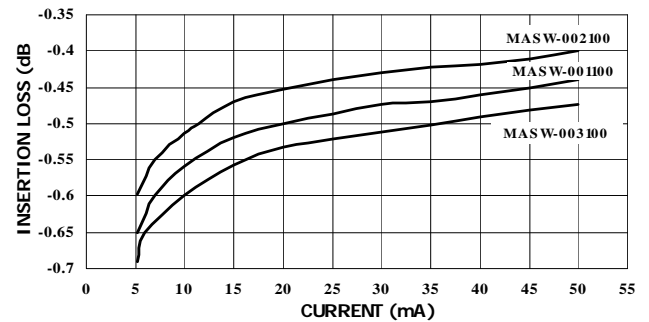

ISOLATION vs. BIAS CURRENT @ 10 GHz

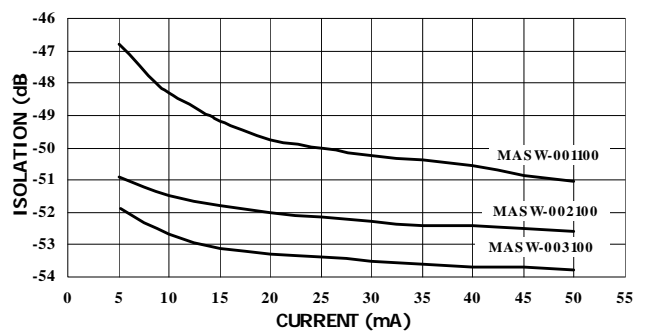

HMIC™ Silicon PIN Diode Switches

V6

Operation of the MASW Series Switches

Operation of the MASW series of PIN switches is achieved by simultaneous application of negative DC current to the low loss switching arm J1, J2, or J3, and positive DC current to the remaining switching arms as shown in the bias connection circuits. DC return is achieved via J1. The control currents should be supplied by constant current sources. The voltages at these points will not exceed ± 1.5 volts (1.2V typical) at currents up to ± 20 mA. In the low loss state, the series diode must be forward biased and the shunt diode reverse biased. In the isolated arm, the shunt diode is forward biased and the series diode is reverse biased.

Driver Connections MASW-001100-1190

| Control Level (DC Current) at | Condition of RF Output |
|-------------------------------|------------------------|
| J2 | J1-J2 |
| -20mA | Low Loss |
| +20mA | Isolation |

MASW-002100-1191

| Control Level (DC Current) at | Condition of RF Output | Condition of RF Output |
|-------------------------------|------------------------|------------------------|
| J2 | J3 | J1-J2 |
| -20mA | +20mA | Low Loss |
| +20mA | -20mA | Isolation |

MASW-003100-1192


| Control Level (DC Current) at | Cond. of RF Output | Cond. of RF Output | Cond. of RF Output |
|-------------------------------|--------------------|--------------------|--------------------|
| J2 | J3 | J4 | J1-J2 |
| -20mA | +20mA | +20mA | Low Loss |
| +20mA | -20mA | +20mA | Isolation |
| +20mA | +20mA | -20mA | Low Loss |

Handling Considerations


Cleanliness: These chips should be handled in a clean environment.

Electro-Static Sensitivity: The MASW series PIN switches are ESD, Class 1A sensitive (HBM). The proper ESD handling procedures should be used.


MASW-001100-1190 and Bias Connections¹

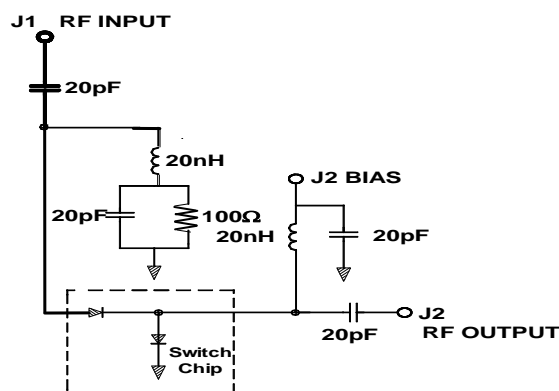

MASW-002100-1191 and Bias Connections¹

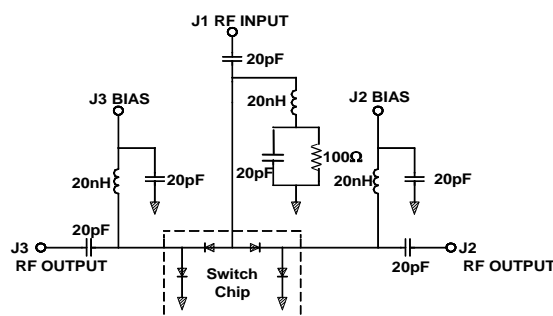

MASW-003100-1192 and Bias Connections¹

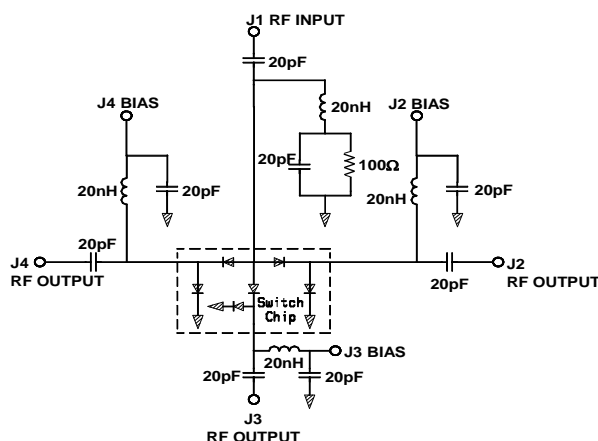

Notes:

1. RLC values are for an operation frequency of 2-18GHz and bias current of ± 20 mA per diode.

HMIC™ Silicon PIN Diode Switches

V6

Wire Bonding

Thermosonic wedge bonding using 0.003" x 0.00025" ribbon or 0.001" diameter gold wire is recommended. A stage temperature of 150°C and a force of 18 to 22 grams should be used. Ultrasonic energy, if necessary, should be adjusted to the minimum power required to achieve a good bond. RF wire and ribbon lengths should be kept as short as possible to minimize parasitic inductance.


Mounting

These chips have Ti-Pt-Au back metal and can be mounted using 80Au/20Sn eutectic solder or electrically conductive Ag epoxy. Mounting surface must be flat and clean of oils and contaminants.

Eutectic Die Attachment: An 80/20 gold-tin eutectic solder preform is recommended with a work surface temperature of 255°C and a tool tip temperature of 265°C. When hot gas is applied, the tool tip temperature should be 290°C. The chip should not be exposed to temperatures greater than 320°C for more than 20 seconds. No more than three seconds should be required for attachment. Solders containing tin should not be used.

Epoxy Die Attachment: A controlled thickness of no more than 2 mils is recommended for the best electrical and thermal conductivity. A thin epoxy fillet should be visible around the perimeter of the chip after placement to ensure complete coverage. Cure epoxy per manufacturer's recommended schedule. Typically +150°C for 1 hour.

Chip Outline Drawing^{1,2}

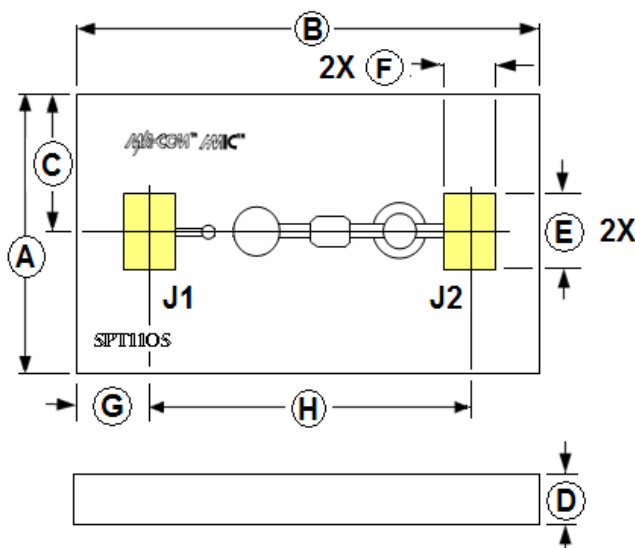


| DIM | INCHES | | MM | |
|-----|-----------|-------|----------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.014 | 0.018 | 0.35 | 0.45 |
| B | 0.025 | 0.029 | 0.64 | 0.74 |
| C | 0.008 REF | | 0.20 REF | |
| D | 0.004 | 0.006 | 0.10 | 0.15 |
| E | 0.004 REF | | 0.10 REF | |
| F | 0.003 REF | | 0.08 REF | |
| G | 0.003 REF | | 0.08 REF | |
| H | 0.020 REF | | 0.52 REF | |

Notes:

1. Topside and backside surface metallization is gold, 2.5µm thick typical.
2. Yellow areas indicate wire bonding pads.

Chip Outline Drawing^{1,2}

MASW-002100-1191

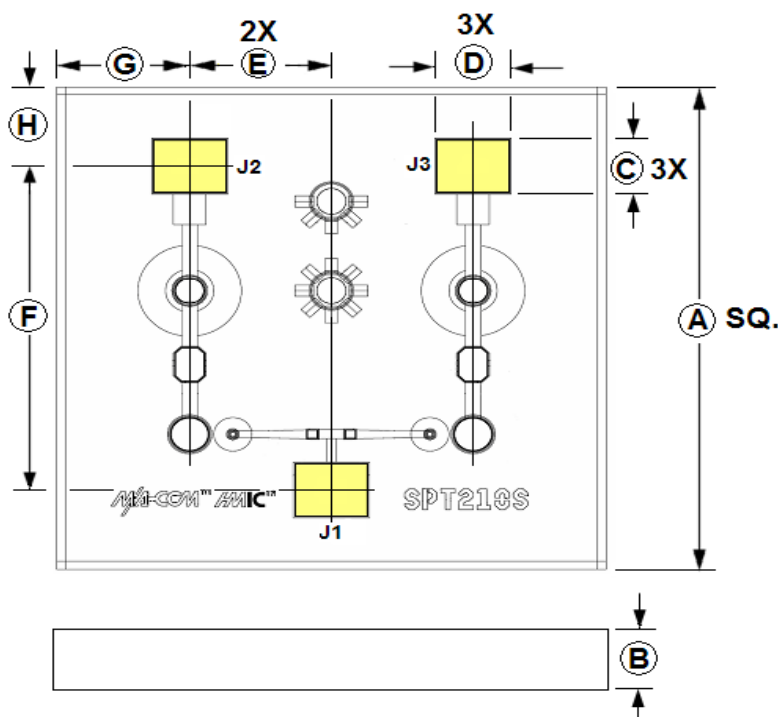


| DIM | INCHES | | MM | |
|-----|-----------|-------|----------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.029 | 0.033 | 0.73 | 0.83 |
| B | 0.004 | 0.006 | 0.10 | 0.15 |
| C | 0.004 REF | | 0.10 REF | |
| D | 0.005 REF | | 0.13 REF | |
| E | 0.009 REF | | 0.23 REF | |
| F | 0.023 REF | | 0.58 REF | |
| G | 0.007 REF | | 0.17 REF | |
| H | 0.004 REF | | 0.10 REF | |

Notes:

1. Topside and backside surface metallization is gold , 2.5µm thick typical.
2. Yellow areas indicate wire bonding pads

Chip Outline Drawing^{1, 2}

MASW-003100-1192

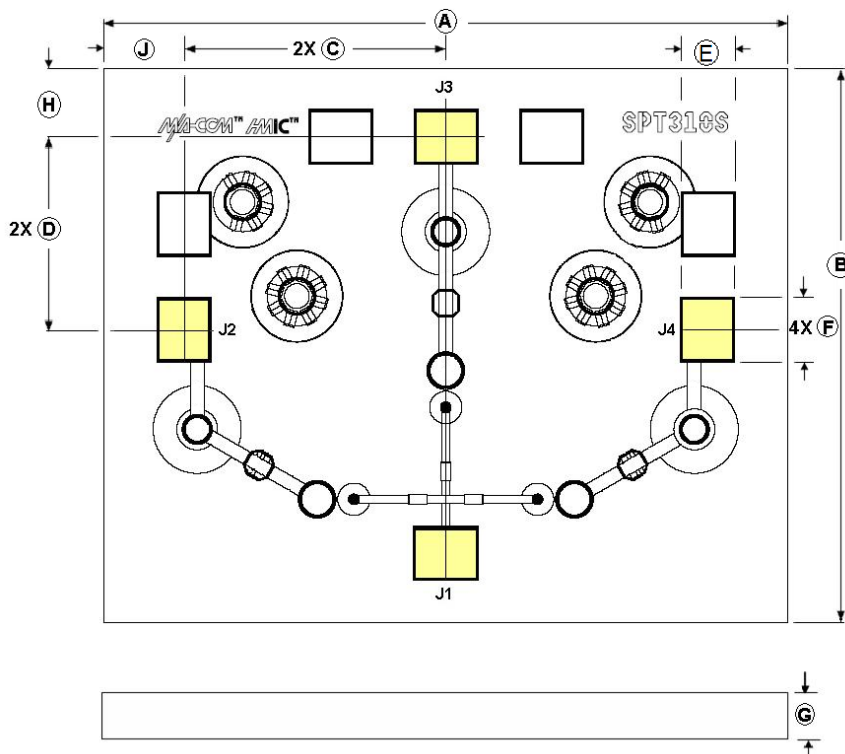

| DIM | INCHES | | MM | |
|-----|-----------|-------|----------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.046 | 0.050 | 1.16 | 1.26 |
| B | 0.036 | 0.040 | 0.92 | 1.02 |
| C | 0.019 REF | | 0.48 REF | |
| D | 0.014 REF | | 0.36 REF | |
| E | 0.004 REF | | 0.10 REF | |
| F | 0.005 REF | | 0.13 REF | |
| G | 0.004 | 0.006 | 0.10 | 0.15 |
| H | 0.005 REF | | 0.12 REF | |
| J | 0.004 REF | | 0.10 REF | |

Notes:

1. Topside and backside surface metallization is gold , 2.5µm thick typical.
2. Yellow areas indicate wire bonding pads

Ordering Information

| Part Number | Package |
|--------------------|-------------|
| MASW-001100-11900W | Waffle Pack |
| MASW-001100-11900G | Gel Pack |
| MASW-002100-11910W | Waffle Pack |
| MASW-002100-11910G | Gel Pack |
| MASW-003100-11920W | Waffle Pack |
| MASW-003100-11920G | Gel Pack |

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com