


ACG-1024 (4167202-00) for Sharp LQ10D42

January 22, 2001

Item List	P/N	Connector Description	Jumper/Switch	Setting
Controller: ACG-1024	4167202-00	CN2 Panel connector,Hirose DF11-28DP-2DSA	JA1 On board +5V logic supply enable (factory set)	1-3, 2-4 closed
Panel connection kit: Panel cable, 330mm	4263112-00	CN3 Panel connector,Hirose DF11-32DP-2DSA	JA2 On board +3.3V Logic supply enable	1-3, 2-4 closed
		CN4 Panel connector,Hirose DF11-20DP-2DSA	JA3 Panel power voltage select	3-5 & 4-6 closed
		CN8 Serial Control input connector,JST B6B-XH-A	JA5 +12V Panel power select	open
		CNA1 Auxiliary power connector, JST B4B-XH-A	JA6 Input power control	open
Inverter kit: Inverter: INV15-208	5560202-00	CNB1 Backlight inverter connector, JST B5B-XH-A	JB2 Backlight inverter On/Off control - signal level	2-3 closed
	4260518-01	CNC1 OSD control connector, JST B12B-XH-A	JB3 Backlight inverter On/Off control - polarity level	1-2 closed
OSD kit: OSD switch mount (VR type)	4106805-50	GND1 Ground blade	JP15 Panel selection	1-2 & 3-4 closed
	4206802-60	LED1 Dual colour LED connector, header pin 3x1		
Others	4200003-11	P1 VGA in, DB 15 way DDC version		
	5000007-00	PP1 Main power in, 2.5mm DC jack		

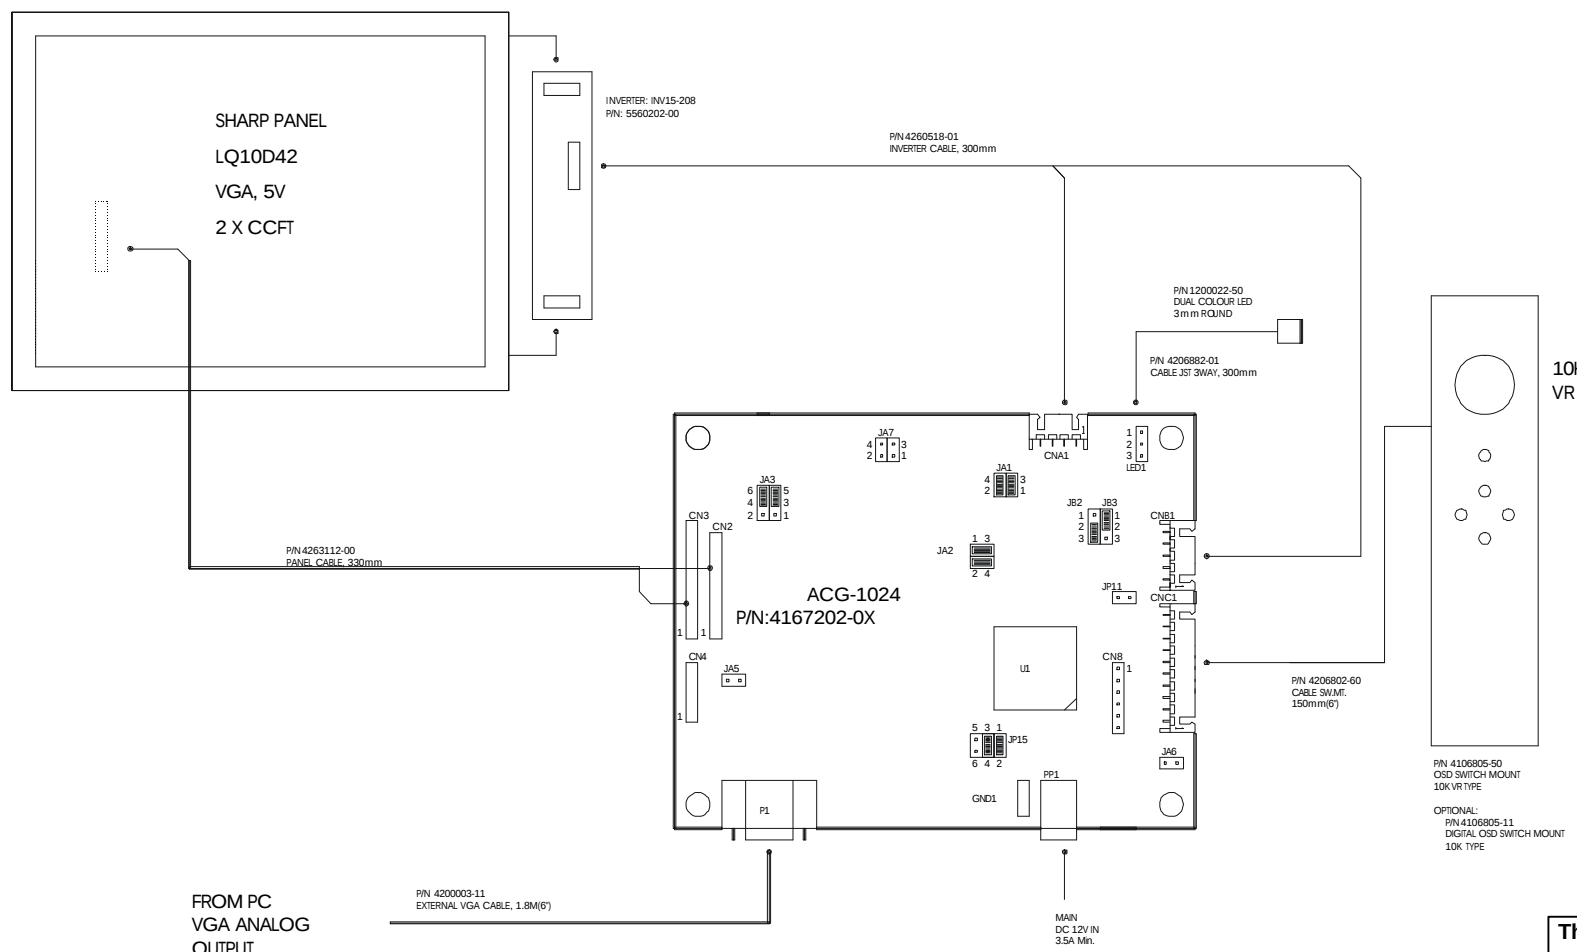

READ DOCUMENTS FOR
PROPER JB2 & JB3 SETTINGS
AND PROPER INVERTER CABLE
IF USING OTHER INVERTER

This Connection diagram is also
applicable to controller
p/n:4167202-0X,
where X=0

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com