



N-Channel 240-V (D-S) MOSFET

PRODUCT SUMMARY

Part Number	V _{DS} Min (V)	r _{DS(on)} (Ω)	V _{GS(th)} (V)	I _D (A)	Q _g (Typ)
TN2404K	240	4 @ V _{GS} = 10 V	0.8 to 2.0	0.2	4.87
TN2404KL/BS107KL		4 @ V _{GS} = 10 V	0.8 to 2.0	0.3	

FEATURES


- Low On-Resistance: 4 Ω
- Secondary Breakdown Free: 260 V
- Low Power/Voltage Driven
- Low Input and Output Leakage
- Excellent Thermal Stability

BENEFITS

- Low Offset Voltage
- Full-Voltage Operation
- Easily Driven Without Buffer
- Low Error Voltage
- No High-Temperature "Run-Away"

APPLICATIONS

- High-Voltage Drivers: Relays, Solenoids, Lamps, Hammers, Displays, Transistors, etc.
- Telephone Mute Switches, Ringer Circuits
- Power Supply, Converters
- Motor Control





Marking Code: K1ywl

K1 = Part Number Code for TN2404K

y = Year Code

w = Week Code

l = Lot Traceability

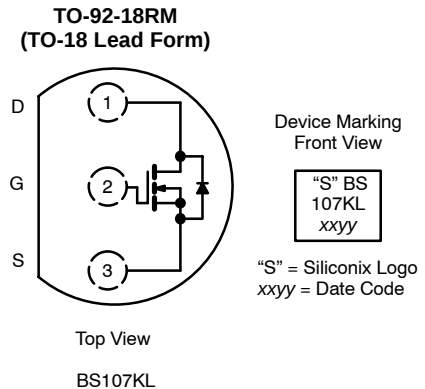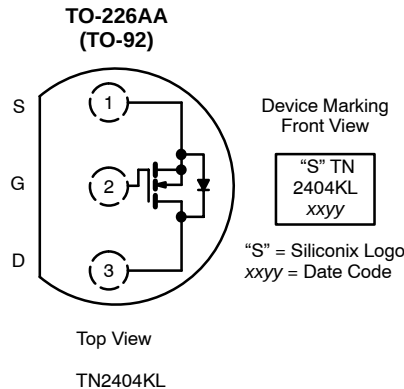

ORDERING INFORMATION

Standard Part Number	Lead (Pb)-Free Part Number	Option
TN2404K-T1	TN2404K-T1—E3	With Tape and Reel Folding Option
TN2404KL-TR1	TN2404KL-TR1—E3	Spool Option
BS107KL-TR1	BS107KL-TR1—E3	

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C UNLESS OTHERWISE NOTED)

Parameter		Symbol	TN2404K	TN2404KL/BS107KL	Unit
Drain-Source Voltage		V _{DS}	240		V
Gate-Source Voltage		V _{GS}	± 20		
Continuous Drain Current (T _J = 150°C)	T _A = 25°C	I _D	0.2	0.3	A
	T _A = 70°C		0.16	0.25	
Pulsed Drain Current ^a		I _{DM}	0.8	1.4	
Power Dissipation	T _A = 25°C	P _D	0.36	0.8	W
	T _A = 70°C		0.23	0.51	
Thermal Resistance, Junction-to-Ambient		R _{thJA}	350 ^b	156	°C/W
Operating Junction and Storage Temperature Range		T _J , T _{stg}	–55 to 150		°C

Notes

a. Pulse width limited by maximum junction temperature.







b. Surface mounted on an FR4 board.

SPECIFICATIONS (T _A = 25° C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ ^a	Max	
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = 100 μA	240	257		V
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	0.8	1.65	2.0	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ± 20 V			± 100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 192 V, V _{GS} = 0 V			1	μA
		T _J = 55°C			10	
On-State Drain Current ^b	I _{D(on)}	V _{DS} = 10 V, V _{GS} = 10 V	0.8			A
		V _{DS} = 10 V, V _{GS} = 4.5 V	0.5			
Drain-Source On-Resistance ^b	r _{DS(on)}	V _{GS} = 10 V, I _D = 0.3 A		2.2	4	Ω
		V _{GS} = 4.5 V, I _D = 0.2 A		2.3	4	
		V _{GS} = 2.5 V, I _D = 0.1 A		2.4	6	
Forward Transconductance ^b	g _{fs}	V _{DS} = 10 V, I _D = 0.3 A		1.6		S
Diode Forward Voltage	V _{SD}	I _S = 0.3 A, V _{GS} = 0 V		0.8	1.2	V
Dynamic ^a						
Total Gate Charge	Q _g	V _{DS} = 192 V, V _{GS} = 10 V, I _D = 0.5 A		4.87	8	nC
Gate-Source Charge	Q _{gs}			0.56		
Gate-Drain Charge	Q _{gd}			1.53		
Turn-On Time	t _{d(on)}	V _{DD} = 60 V, R _L = 200 Ω I _D = 0.3 A, V _{GEN} = 10 V, R _G = 25 Ω		5	10	nS
	t _r			12	20	
turn-Off Time	t _{d(off)}			35	60	
	t _r			16	25	

Notes


- a. For DESIGN AID ONLY, not subject to production testing.
b. Pulse test: $PW \leq 300\text{ }\mu\text{s}$ duty cycle $\leq 2\%$.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

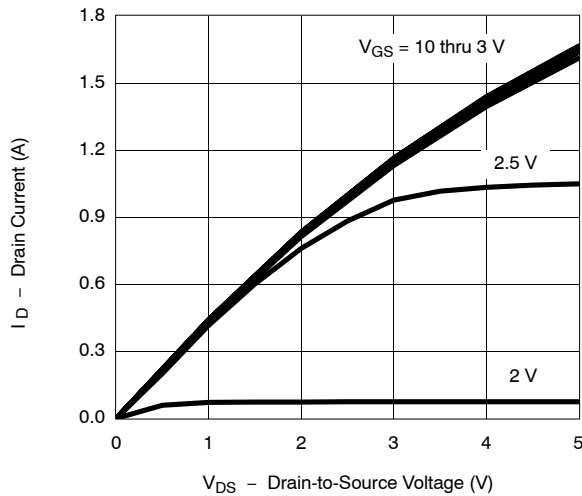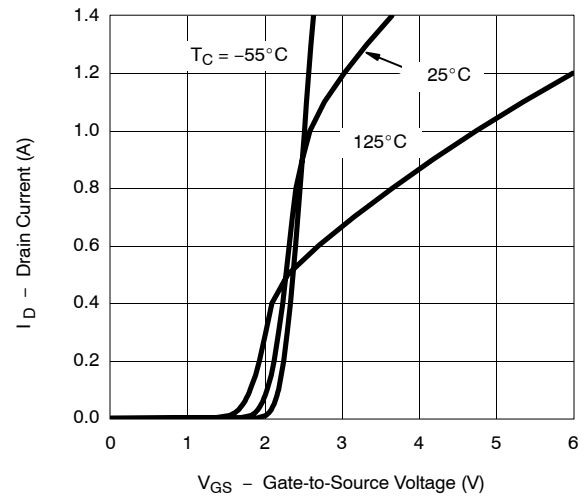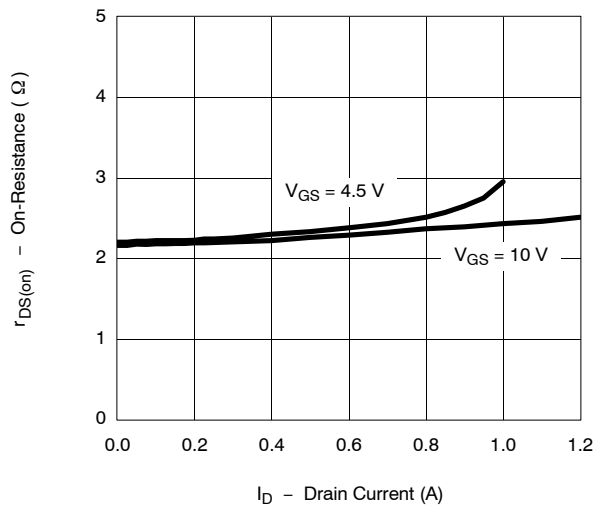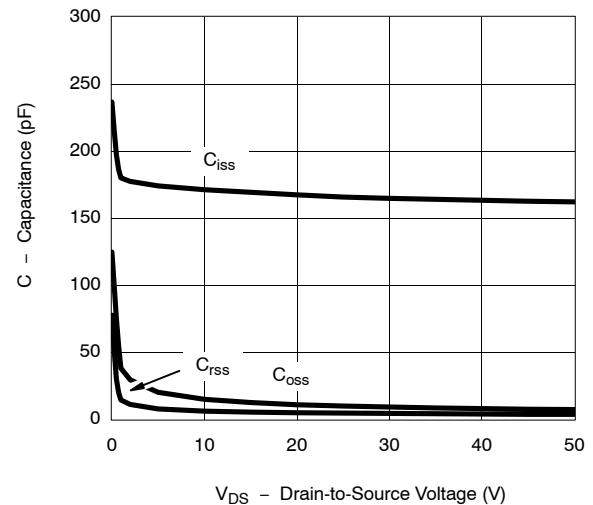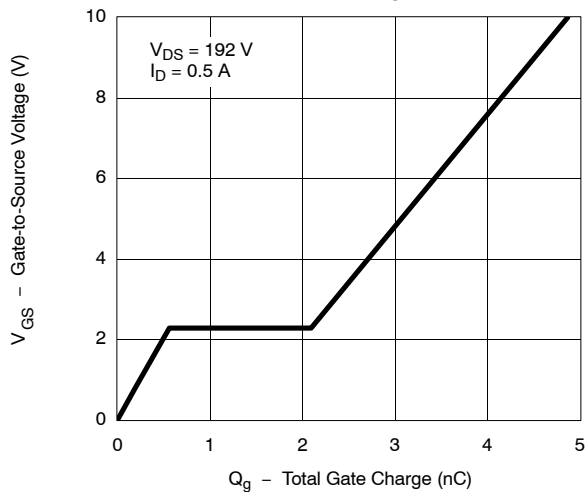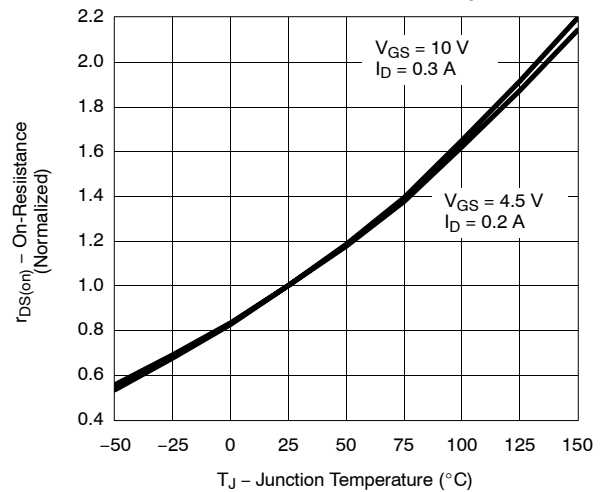
**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)****Output Characteristics****Transfer Characteristics****On-Resistance vs. Drain Current****Capacitance****Gate Charge****On-Resistance vs. Junction Temperature**

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Source-Drain Diode Forward Voltage

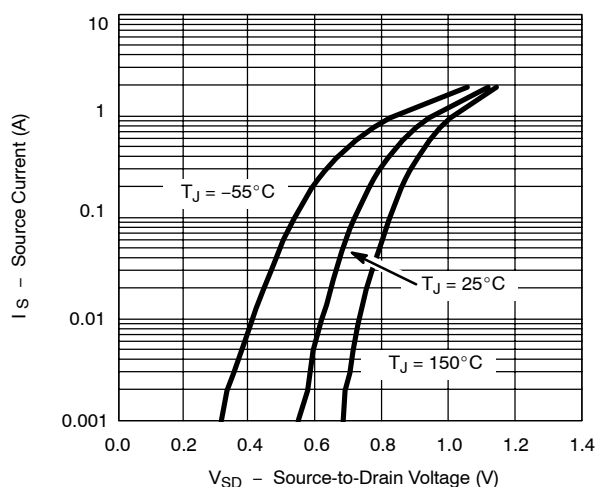


On-Resistance vs. Gate-to-Source Voltage

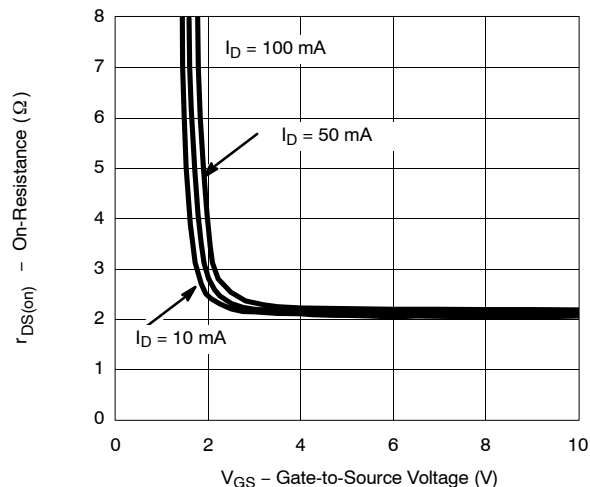

Threshold Voltage

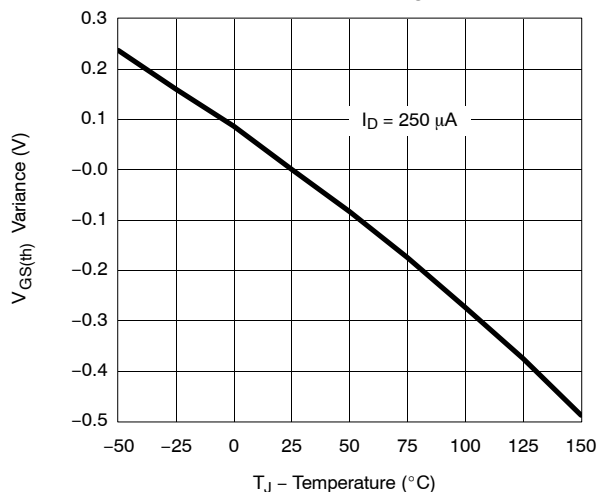


Normalized Thermal Transient Impedance, Junction-to-Ambient (TO-236, TN2404K Only)

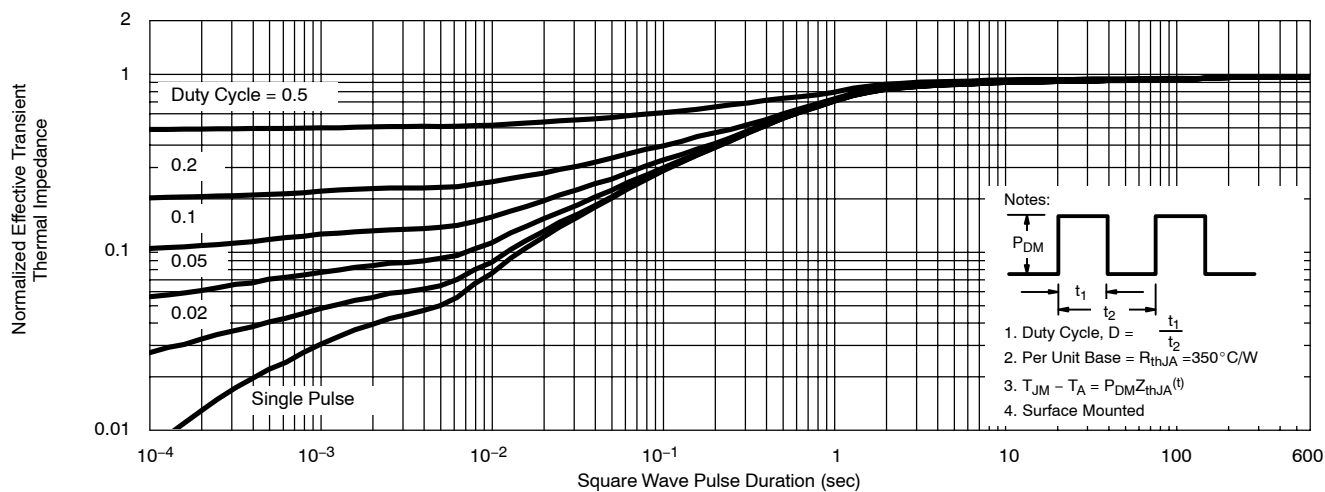

**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

Normalized Effective Transient Thermal Impedance, Junction-to-Ambient
(TO-226AA, TN2404KL and TO-92-18RM, BS107KL Only)

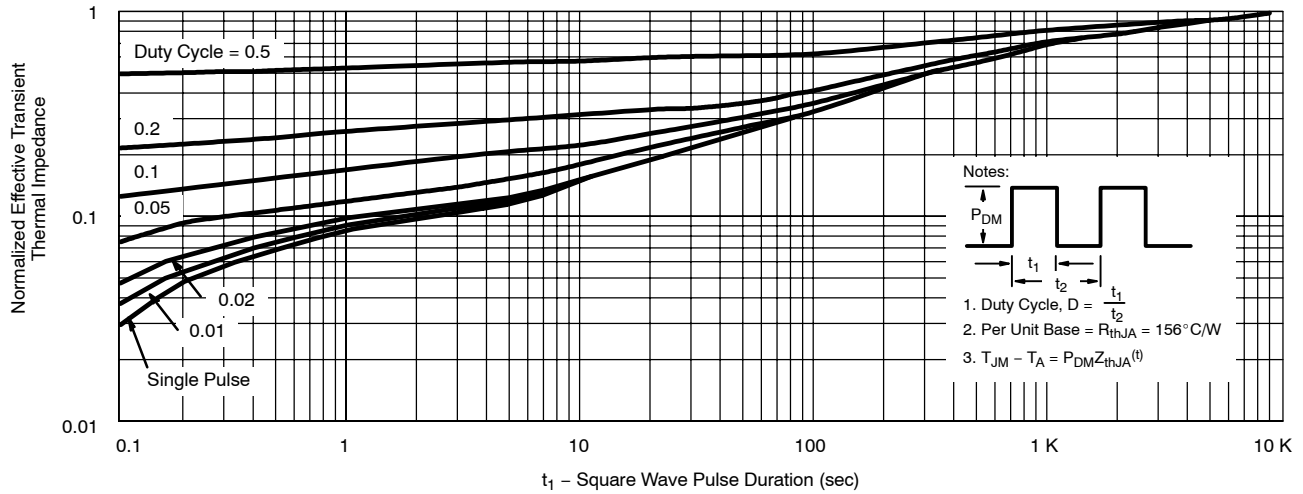

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <http://www.vishay.com/ppg?72225>.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com