

Super323™ SOT323 NPN SILICON POWER(SWITCHING) TRANSISTOR

ISSUE 1 - SEPTEMBER 1998


ZUMT618

FEATURES

- * **500mW POWER DISSIPATION**
- * **I_C CONT 1.25A**
- * 3A Peak Pulse Current
- * Excellent H_{FE} Characteristics Up to 3A (pulsed)
- * Extremely Low Equivalent On Resistance; $R_{CE(sat)}$

APPLICATIONS

- * Corded telecoms.
- * Boost functions in DC-DC converters
- * Motor driver functions



DEVICE TYPE	COMPLEMENT	PARTMARKING	$R_{CE(sat)}$
ZUMT618	ZUMT718	T62	125m Ω at 1.25A

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	20	V
Collector-Emitter Voltage	V_{CEO}	20	V
Emitter-Base Voltage	V_{EBO}	5	V
Peak Pulse Current**	I_{CM}	4	A
Continuous Collector Current	I_C	1.25	A
Base Current	I_B	500	mA
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	385 † 500 ‡	mW
Operating and Storage Temperature Range	$T_J; T_{stg}$	-55 to +150	$^{\circ}C$

† Recommended P_{tot} calculated using FR4 measuring 10 x 8 x 0.6mm (still air).

‡ Maximum power dissipation is calculated assuming that the device is mounted on FR4 size 25x25x0.6mm and using comparable measurement methods adopted by other suppliers.


ZUMT618

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	20			V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	20			V	$I_C = 10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5			V	$I_E = 100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}			10	nA	$V_{CB} = 16\text{V}$
Emitter Cut-Off Current	I_{EBO}			10	nA	$V_{EB} = 4\text{V}$
Collector Emitter Cut-Off Current	I_{CES}			10	nA	$V_{CES} = 16\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		16.5 40 80 140 155	25 60 115 200 250	mV mV mV mV mV	$I_C = 100\text{mA}, I_B = 10\text{mA}^*$ $I_C = 250\text{mA}, I_B = 10\text{mA}^*$ $I_C = 500\text{mA}, I_B = 10\text{mA}^*$ $I_C = 1\text{A}, I_B = 20\text{mA}^*$ $I_C = 1.25\text{A}, I_B = 50\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		955	1100	mV	$I_C = 1.25\text{A}, I_B = 50\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		840	1100	mV	$I_C = 1.25\text{A}, V_{CE} = 2\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	200 300 200 100 40 20	420 450 380 300 180 60			$I_C = 10\text{mA}, V_{CE} = 2\text{V}^*$ $I_C = 100\text{mA}, V_{CE} = 2\text{V}^*$ $I_C = 500\text{mA}, V_{CE} = 2\text{V}^*$ $I_C = 1\text{A}, V_{CE} = 2\text{V}^*$ $I_C = 2\text{A}, V_{CE} = 2\text{V}^*$ $I_C = 4\text{A}, V_{CE} = 2\text{V}^*$
Transition Frequency	f_T		210		MHz	$I_C = 50\text{mA}, V_{CE} = 10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	C_{obo}		10		pF	$V_{CB} = 10\text{V}, f = 1\text{MHz}$
Turn-On Time	$t_{(on)}$		50		ns	$V_{CC} = 10\text{V}, I_C = 1\text{A}$ $I_{B1} = I_{B2} = 100\text{mA}$
Turn-Off Time	$t_{(off)}$		275		ns	

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

TYPICAL CHARACTERISTICS

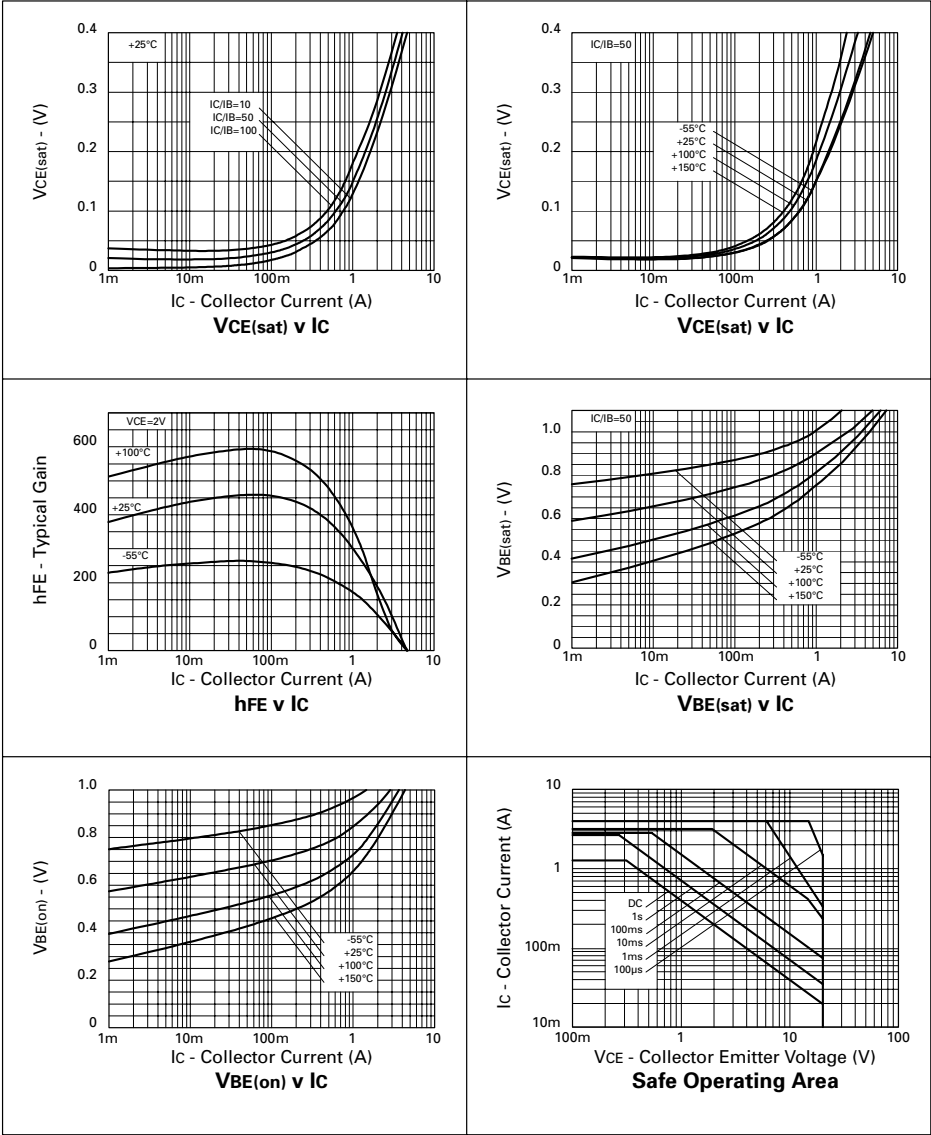

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com