

# M series

Miniature resistive joysticks



The M Series miniature joystick is a low profile potentiometric controller providing precision multi-axes finger-positioning control. Available with up to three axes and two pushbuttons, the M Series joystick is ideal for applications requiring a compact low operating force controller. Featuring 17 ergonomically designed handles, typical applications include CCTV, robotics, electric wheelchairs, and measurement systems. The M Series is the de facto standard industrial joystick for the CCTV professional.



## KEY FEATURES

- ☐ **World's #1 selling joystick for CCTV applications**
- ☐ **Potentiometric sensing**
- ☐ **One, two or three axes**
- ☐ **Low profile design with 17 handle options**



# M series

Miniature resistive joysticks

## OPTION SELECTION

M		1				1	
---	--	---	--	--	--	---	--

SERIES

MOUNTING BEZEL

C Split Bezel  
F Square Bezel  
L Rubber Boot Kit

MODEL

1 2 Axes  
2 2 Axes with Pushbuttons  
3 3 Axes  
4 3 Axes with Pushbuttons

CENTERING


0 Spring Centering  
6 Torque Set (Friction)

HANDLE

0 Tapered Convex  
1 Concave Tip  
2 Flat Tipped  
3 Concave Tip - Long  
5 Pushbutton  
6 Straight Tip - Short  
8 3 Axes  
9 3 Axes with Pushbutton  
A Straight Tip - Mid  
B Straight Tip - Long  
C Ball Tip  
E Pushbutton  
G Pushbutton  
H Pushbutton  
M 3 Axes No Button  
N 3 Axes with 1 Button  
Q 3 Axes with 2 Buttons

OUTPUT OPTIONS

Potentiometers<sup>3</sup> :  
P 5KΩ, 220°  
M 5KΩ, 56°  
R 5KΩ, 50°

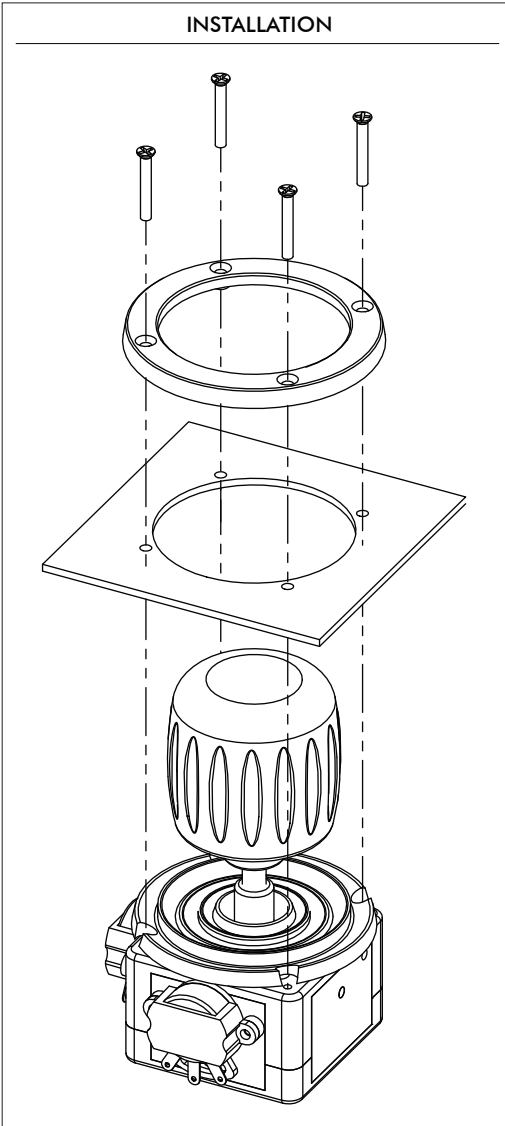

### NOTES

1. Front Mounting Bezels (FM)



C = Split Bezel  
Cutout dimensions = 39.70mm(1.562in)



L = Rubber Boot  
Cutout dimensions = 39.70mm(1.1.562in)

2. Rear mounting bezels (RM)



F = Square Bezel  
Cutout dimensions = 30.15mm(1.187in)

3. Potentiometer specifications are located on the next page.



Mounting accessories. Standard hardware includes:

- C = Ring, cup, and 4 black screws 2-56x1/2in
- L = Ring and 4 black screws 2-56x1/2in
- F = Square bezel, 4 screws 2-56x1/2in, and 4 screws 2-56x1/4in

Note: The company reserves the right to change specifications without notice.

# M series

## Miniature resistive joysticks

### SPECIFICATIONS

#### MECHANICAL (FOR X AND Y AXES)

Break Out Force	–	0.7N (0.16lbf)
Operating Force	–	1.3N (0.29lbf)
Maximum Applied Force	–	100N (22.48lbf)
Mechanical Angle of Movement	–	56°
Expected Life	–	See potentiometer options
Mass/weight	–	Varies
Package Size (mm) (L x W x H) or (Dia x H)	–	Varies
Lever Action (Centering)	–	Spring or Friction

#### MECHANICAL (FOR Z AXIS)

Break Out Torque	–	0.022N·m (0.19lbf·in)
Operating Torque	–	0.040N·m (0.35lbf·in)
Maximum Allowable Torque	–	0.049N·m (0.43lbf·in)
Mechanical Angle	–	90°
Handle Action	–	Spring

#### ENVIRONMENTAL

Operating Temperature	–	-25°C to 70°C (-13°F to 158°F)
Storage Temperature	–	-40°C to 70°C (-40°F to 158°F)

#### POTENTIOMETER OPTIONS

Potentiometer	P	M	R
Electrical Element	Conductive Plastic	Conductive Plastic	Conductive Plastic
Track Resistance	5K	5K	5K
Linearity	±1.0%	±5.0%	±1.0%
Track Operating Angle	220°	56°	50°
CRV	±1.5%	±1.5%	±1.0%
Power Dissipation	0.25W @ 40°C	0.5W @ 70°C	1W
Rotational Life	1,000,000	1,000,000	10,000,000

#### CENTERING OPTIONS

- **SPRING CENTERING**

The joystick returns to center when the handle is released.

- **TORQUE SET**

Torque set provides absolute positioning with uniform friction applied to "X" and "Y" axes.


#### NOTES:

- All values are nominal
- Specifications are subject to the joystick configuration. Contact Technical Support for the performance of your specific configuration
- The M Series is intended for internal applications

# M series



## Miniature resistive joysticks

### DIMENSIONAL DRAWINGS

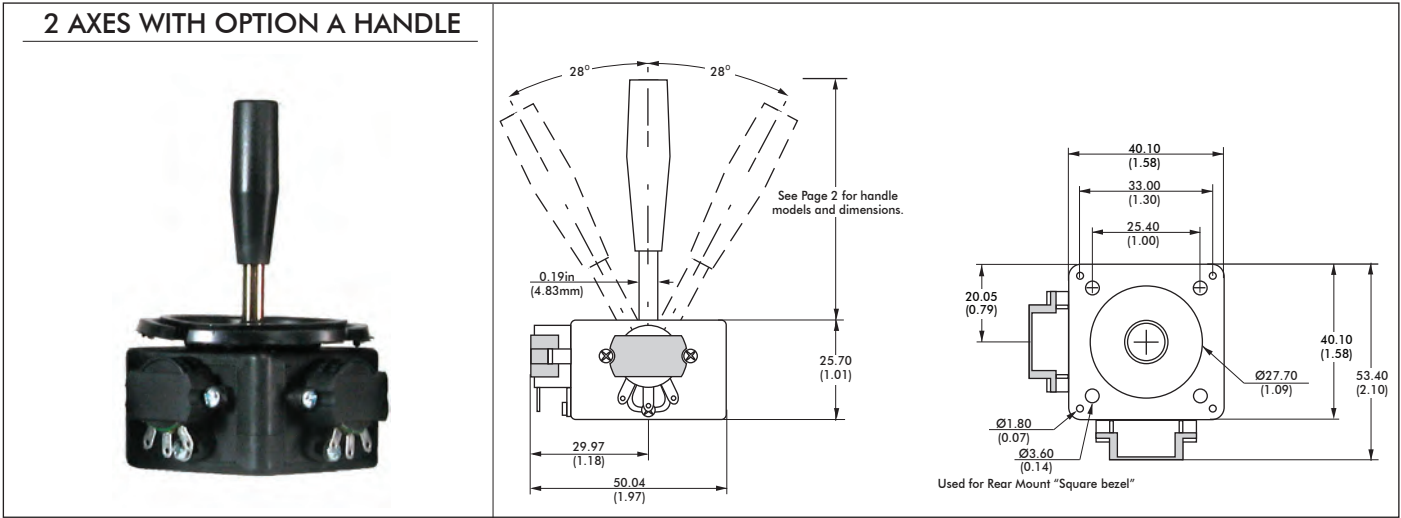

- NOTES:
- Mechanical dimensions represent a joystick with the largest potentiometer option.
  - Potentiometer size will vary according to selected option.

#### HANDLES

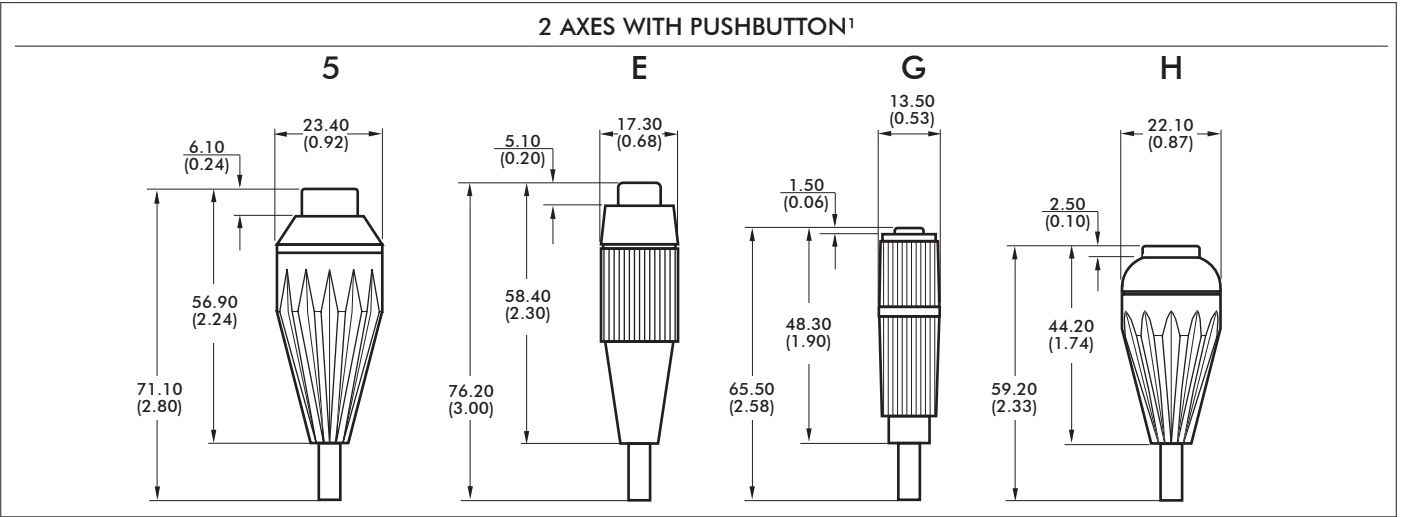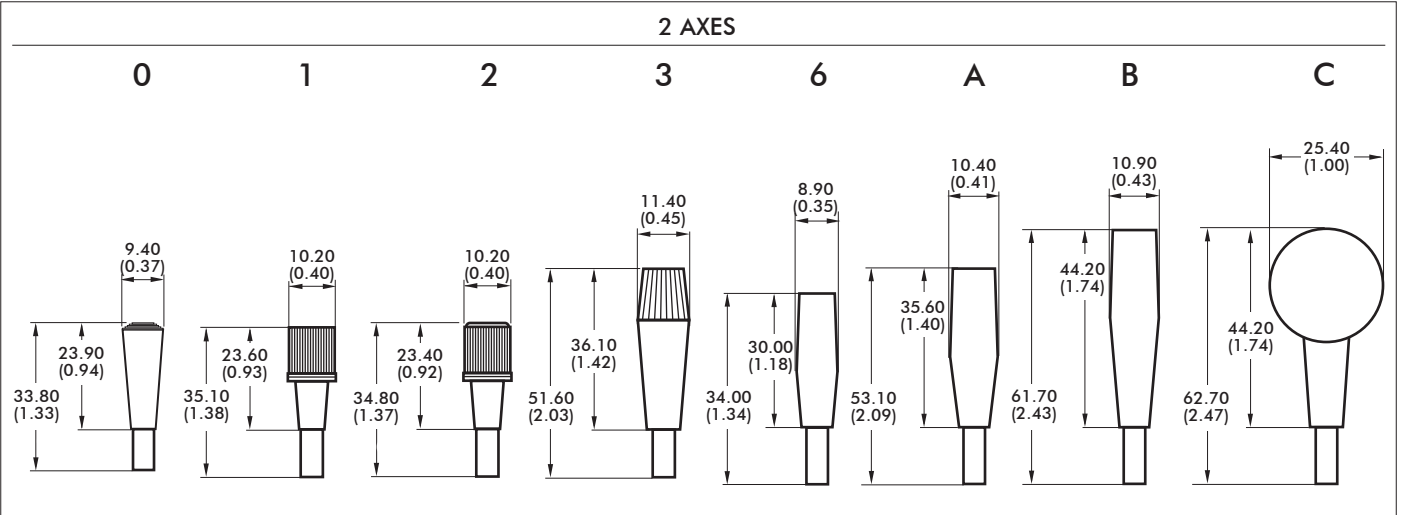

- NOTES:
- Pushbuttons are not sealed. Joysticks are intended for internal applications only.


Note: The company reserves the right to change specifications without notice.

# M series


## Miniature resistive joysticks

### DIMENSIONAL DRAWINGS - continued

#### 3 AXES

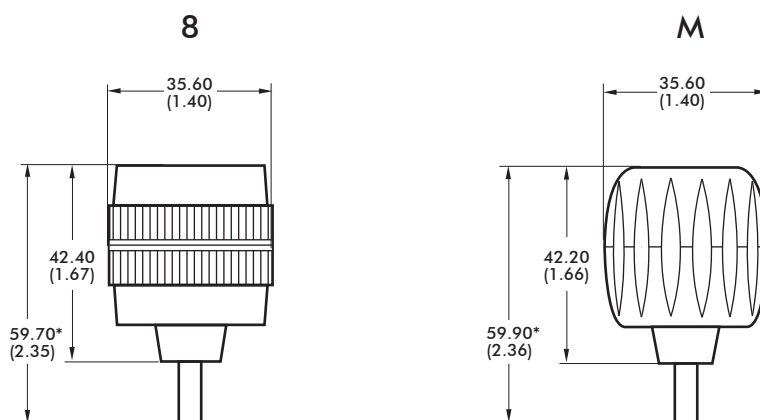


#### 3 AXES WITH PUSHBUTTONS

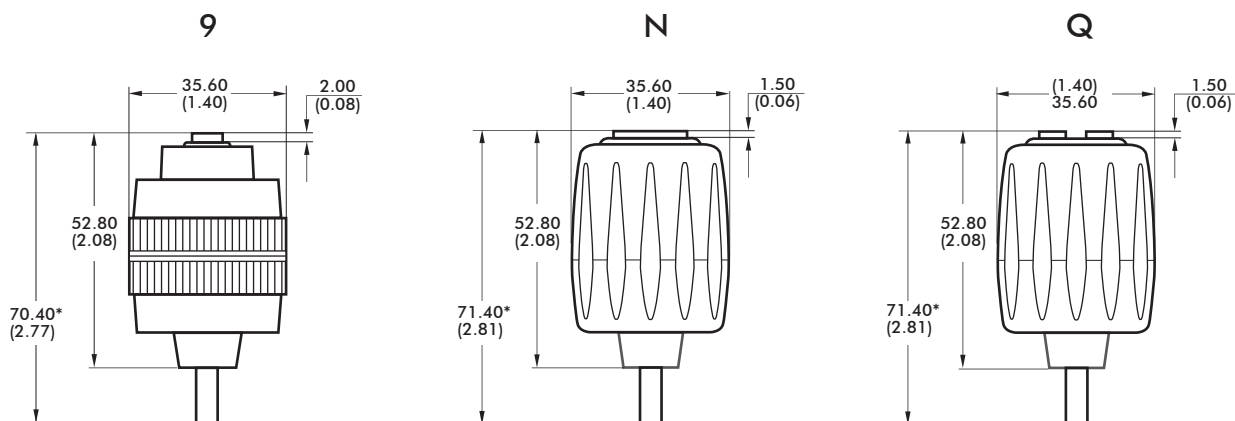

#### NOTES:

1. Dimensions are in mm/(inch)
2. Pushbuttons are not sealed. Joysticks are intended for internal applications only.

3. Axes orientation:



4. Wiring information: -Cables are provided for pushbuttons and the Z axis.  
-Cables are not supplied for the potentiometers (axes X and Y).


#### DEFAULT WIRE COLOR CODE\*

DETAILS WIRE COLOR CODE		
COLOR	FUNCTION	AWG
2 OR 3 AXES JOYSTICK WITH 1 PUSHBUTTON - OPTIONS 5,E,G,H,9,N		
ORANGE	Switch 1	28
ORANGE	Switch Common	
3 AXES JOYSTICK WITH 2 PUSHBUTTONS - Option Q**		
ORANGE	Switch 1	28
BROWN	Switch 2	
GREEN	Switch Common	
Z AXIS IN A 3 AXES JOYSTICK - OPTIONS 8,9,M,N,Q		
RED	Supply	28
WHITE	Signal	
BLUE	Return	

#### NOTES:

\* Wires for the Z axis and for the pushbuttons are 292mm (11.5in) and stripped.

\*\* Handle "Q" pushbuttons are shown in the following drawing:





# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)