

Through Hole Current Sense Transformers

VDE Approved



- Meet IEC950 insulation requirements
- 4250V_{RMS} primary to secondary breakdown voltage
- Frequency range 10kHz to 200kHz

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C


Part Number	I _{PK} (Amps)	R _T (Ω)	Drop (%)	K _V (Volt/Amp)	L _S (mH MIN)	DCR R _S (ΩMAX)	Turns (N _S ± 1%)	K _B	K _A	R _{EO} (mΩ)
PE-67050NL	35	15	2.4	0.30	5.0	0.70	50	.269 x 10 ⁶	51.2 x 10 ⁻⁶	.95
PE-67100NL	37	56	2.2	0.56	20	1.40	100	.0671 x 10 ⁶	1.56 x 10 ⁻⁶	.85
PE-67200NL	38	200	2.0	1.00	80	4.50	200	.0168 x 10 ⁶	47.3 x 10 ⁻⁹	.82
PE-67300NL	37	510	2.2	1.70	180	11.0	300	.00746 x 10 ⁶	6.13 x 10 ⁻⁹	.84

Notes:


- These current sense transformers have a 1 turn primary winding, secondary turns (N_S) as indicated in the table, and a 130°C insulation system.
- The reference values are for unipolar operation, 50kHz, 40% duty factor, and an estimated 55°C temperature rise.
- The maximum useable peak sense current (I_{PK}) depends on the temperature rise or core saturation, which should be evaluated for the operating conditions.
- These Current Sense Transformers are recommended for switch mode power supply applications, unipolar or bipolar, operating at frequencies from 10kHz to 200kHz.
- The maximum recommended operating flux density (B_{OP}) is 2000 gauss to prevent saturation at an operating temperature of 105°C.
- The core loss factor (K_A) is valid from 10kHz to 200kHz at 105°C.
- The terminating resistor (R_T) may be varied to adjust operating flux (B_{OP}), droop, or scale factor (K_V).
- The scale factor (K_V) is proportional to the terminating resistor (R_T) and is equal to 1 volt/amp when R_T=N_S.
- The secondary inductance (L_S) is measured at 15kHz and .5V for PE-67050, 1V for PE-67100, 2V for PE-67200 and 3V for PE-67300.

Mechanical

PE-XXXXNL

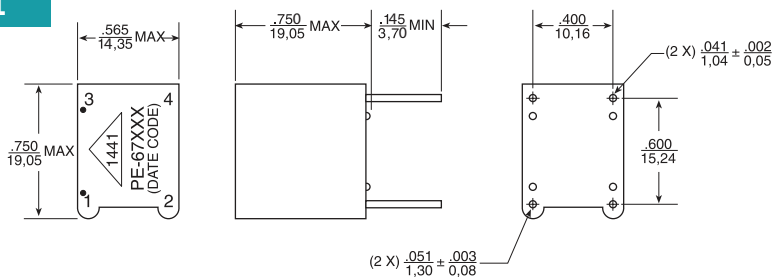

Schematic



Parts per package80

Dimension: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2015, Pulse Electronics, Inc. All rights reserved.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com