
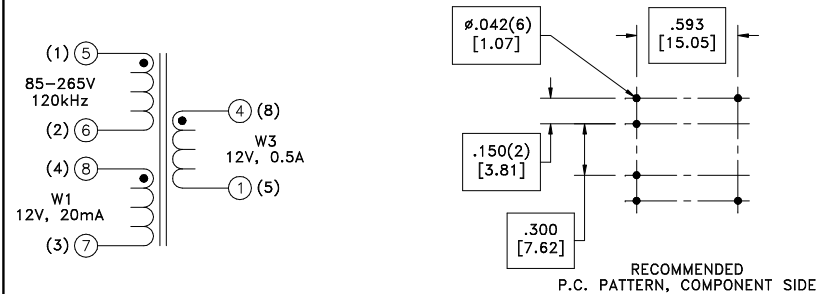


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

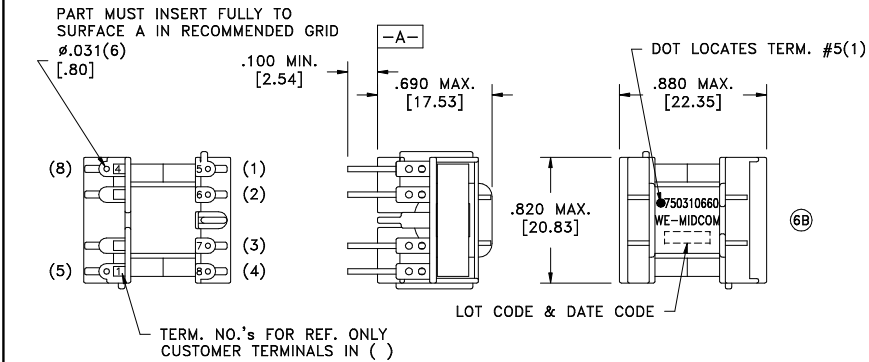

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	5-6 @20°C	2.00 ohms ±10%
D.C. RESISTANCE	8-7 @20°C	0.400 ohms ±10%
D.C. RESISTANCE	4-1 @20°C	0.060 ohms ±10%
INDUCTANCE	5-6 10kHz, 50mVAC, Ls	1.20mH ±10%
LEAKAGE INDUCTANCE	5-6 tie(1+4, 7+8), 10kHz, 50mVAC, Ls	42uH max., 30uH typ.
DIELECTRIC	1-5 4500VAC, 1 second	3600VAC, 1 minute
DIELECTRIC	5-8 2500VAC, 1 second	2000VAC, 1 minute
URNS RATIO	(5-6):(8-7)	7.87:1, ±1%
URNS RATIO	(5-6):(4-1)	7.87:1, ±1%

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE	PART NO.
6B	5/10	Method: Tray PKG-0058 www.we-online.com/midcom		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	TRANSFORMER	750310660
6A	11/08	SEE REVISION SHEET FOR REVISION LEVEL			eiSos p/n: 750310660	SPECIFICATION SHEET 1 OF 1



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com