

## LMP91050 Configurable AFE for Nondispersive Infrared (NDIR) Sensing Applications

Check for Samples: [LMP91050](#)

### FEATURES

- Programmable Gain Amplifier
- “Dark Signal” Offset Cancellation
- Supports External Filtering
- Common Mode Generator and 8 bit DAC

### APPLICATIONS

- NDIR Sensing
- Demand Control Ventilation
- Building Monitoring
- CO<sub>2</sub> Cabin Control — Automotive
- Alcohol Detection — Automotive
- Industrial Safety and Security
- GHG & Freons Detection Platforms

### KEY SPECIFICATIONS

- Programmable gain 167 to 7986 V/V
- Low noise (0.1 to 10 Hz) 0.1  $\mu$ V<sub>RMS</sub>
- Gain Drift 100 ppm/°C (max)
- Phase Delay Drift 500 ns (max)
- Power supply voltage range 2.7 to 5.5 V

### DESCRIPTION

The LMP91050 is a programmable integrated Sensor Analog Front End (AFE) optimized for thermopile sensors, as typically used in NDIR applications. It provides a complete signal path solution between a sensor and microcontroller that generates an output voltage proportional to the thermopile voltage. The LMP91050's programmability enables it to support multiple thermopile sensors with a single design as opposed to the multiple discrete solutions.

The LMP91050 features a programmable gain amplifier (PGA), “dark phase” offset cancellation, and an adjustable common mode generator (1.15V or 2.59V) which increases output dynamic range. The PGA offers a low gain range of 167V/V to 1335V/V plus a high gain range of 1002V/V to 7986V/V which enables the user to utilize thermopiles with different sensitivities. The PGA is highlighted by low gain drift (100 ppm/°C), output offset drift (1.2mV/°C at G = 1002 V/V), phase delay drift (500ns) and noise specifications (0.1  $\mu$ V<sub>RMS</sub> 0.1 to 10Hz) . The offset cancellation circuitry compensates for the “dark signal” by adding an equal and opposite offset to the input of the second stage, thus removing the original offset from the output signal. This offset cancellation circuitry allows optimized usage of the ADC full scale and relaxes ADC resolution requirements.

The LMP91050 allows extra signal filtering (high pass, low pass or band pass) through dedicated pins A0 and A1, in order to remove out of band noise. The user can program through the on board SPI interface. Available in a small form factor 10-pin package, the LMP91050 operates from -40 to +105°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011–2013, Texas Instruments Incorporated

## Block Diagram

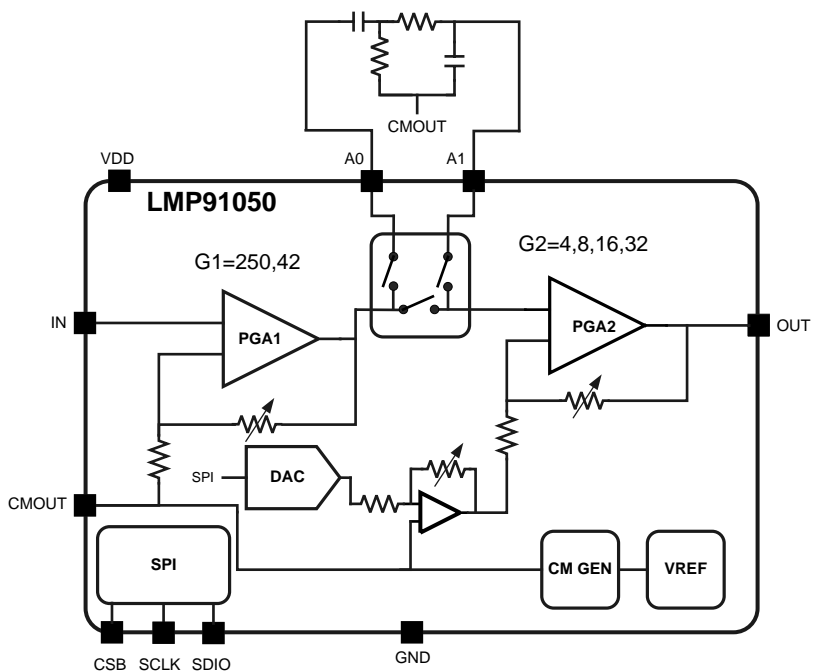


Figure 1. Configurable AFE for NDIR

## Typical Application


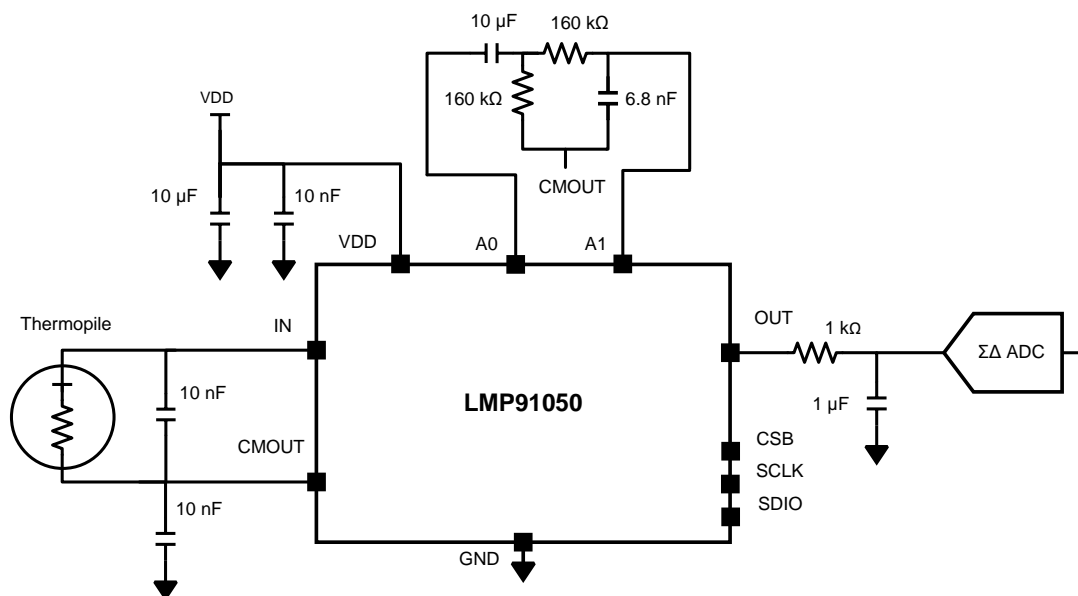


Figure 2. Typical NDIR Sensing Application Circuit

## Connection Diagram

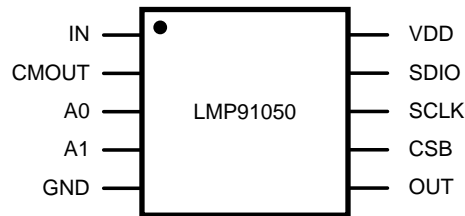

### Pin Descriptions

Pin	Symbol	Type	Description
1	IN	Analog Input	Signal Input
2	CMOUT	Analog Output	Common Mode Voltage Output
3	A0	Analog Output	First Stage Output
4	A1	Analog Input	Second Stage Input
5	GND	Power	Ground
6	OUT	Analog Output	Signal Output, reference to the same potential as CMOUT
7	CSB	Digital Input	Chip Select, active low
8	SCLK	Digital Input	Interface Clock
9	SDIO	Digital Input / Output	Serial Data Input / Output
10	VDD	Power	Positive Supply



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## Absolute Maximum Ratings <sup>(1)(2)</sup>

ESD Tolerance <sup>(3)</sup>	Human Body Model	2500V
	Machine Model	250V
	Charged Device Model	1250V
Supply Voltage (VDD)		–0.3V to 6.0V
Voltage at Any Pin		– 0.3V to VDD + 0.3V
Input Current at Any Pin		5mA
Storage Temperature Range		-65°C to 150°C
Junction Temperature <sup>(4)</sup>		150°C
For soldering specifications: see product folder at <a href="http://www.ti.com">www.ti.com</a> and <a href="http://www.ti.com/lit/SNOA549">http://www.ti.com/lit/SNOA549</a> .		

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the Absolute Maximum Ratings or other conditions beyond those indicated in the Operating Ratings is not implied. Operating Ratings indicate conditions at which the device is functional and the device should not be operated beyond such conditions.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (3) Human Body Model, applicable std. MIL-STD-883, Method 3015.7. Machine Model, applicable std. JESD22-A115-A (ESD MM std. of JEDEC) Field- Induced Charge-Device Model, applicable std. JESD22-C101-C (ESD FICDM std. of JEDEC).
- (4) The maximum power dissipation is a function of  $T_{J(MAX)}$ ,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_{DMAX} = (T_{J(MAX)} - T_A) / \theta_{JA}$ . All numbers apply for packages soldered directly onto a PC board.

## Operating Ratings <sup>(1)</sup>

Supply Voltage	2.7V to 5.5V
Junction Temperature Range (2)	-40°C to 105°C
Package Thermal Resistance, $\theta_{JA}$ 10 Lead VSSOP	176 °C/W

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the Absolute Maximum Ratings or other conditions beyond those indicated in the Operating Ratings is not implied. Operating Ratings indicate conditions at which the device is functional and the device should not be operated beyond such conditions.
- (2) The maximum power dissipation is a function of  $T_{J(MAX)}$ ,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_{DMAX} = (T_{J(MAX)} - T_A) / \theta_{JA}$ . All numbers apply for packages soldered directly onto a PC board.

## Electrical Characteristics <sup>(1)</sup>

The following specifications apply for  $V_{DD} = 3.3V$ ,  $V_{CM} = 1.15V$ , **Bold** values for  $T_A = -40^\circ C$  to  $+85^\circ C$  unless otherwise specified. All other limits apply to  $T_A = T_J = +25^\circ C$ .

Symbol	Parameter	Conditions	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
<b>Power Supply</b>						
VDD	Supply Voltage		2.7	3.3	5.5	V
IDD	Supply Current	All analog block ON	3.1	3.7	4.2	mA
	Power Down Supply Current	All analog block OFF	45	85	121	µA
<b>Offset Cancellation (Offset DAC)</b>						
	Resolution			256		steps
	LSB	All gains		33.8		mV
	DNL		-1		2	LSB
	Error	Output referred offset error, all gains		±100		mV
	Offset adjust Range	Output referred, all gains	0.2		$V_{DD} - 0.2$	V
	DAC settling time			480		µs
<b>Programmable Gain Amplifier (PGA) 1st Stage, <math>R_L = 10k\Omega</math>, <math>C_L = 15pF</math></b>						
IBIAS	Bias Current			5	<b>200</b>	µA
VINMAX_HGM	Max input signal High gain mode	Referenced to CMOUT voltage, it refers to the maximum voltage at the IN pin before clipping; It includes dark voltage of the thermopile and signal voltage.		±2		mV
VINMAX_LGM	Max input signal Low gain mode			±12		mV
VOS	Input Offset Voltage			-165		µV
G_HGM	Gain High gain mode			250		V/V
G_LGM	Gain Low gain mode			42		V/V
GE	Gain Error	Both HGM and LGM		2.5		%
VOUT	Output Voltage Range		0.5		$V_{DD} - 0.5$	V
PhDly	Phase Delay	1mV input step signal, HGM, Vout measured at Vdd/2		6		µs
TCPHDly	Phase Delay variation with Temperature	1mV input step signal, HGM, Vout measured at Vdd/2,		416		ns
SSBW	Small Signal Bandwidth	Vin = 1mVpp, Gain = 250 V/V		18		kHz
Cin	Input Capacitance			100		pF

- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that  $T_J = T_A$ . No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where  $T_J > T_A$ . Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) Limits are 100% production tested at 25°C. Limits over the operating temperature range are ensured through correlations using statistical quality control (SQC) method.
- (3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not ensured on shipped production material.

## Electrical Characteristics<sup>(1)</sup> (continued)

The following specifications apply for VDD = 3.3V, VCM = 1.15V, **Bold** values for TA = -40°C to +85°C unless otherwise specified. All other limits apply to TA = TJ = +25°C.

Symbol	Parameter	Conditions	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
<b>Programmable Gain Amplifier (PGA) 2nd Stage, RS = 1kΩ, CL = 1μF</b>						
VINMAX	Max input signal	GAIN = 4 V/V		1.65		V
VINMIN	Min input signal			0.82		V
G	Gain	Programmable in 4 steps	4		32	V/V
GE	Gain Error	Any gain		2.5		%
VOUT	Output Voltage Range		0.2		VDD – 0.2	V
PhDly	Phase Delay	100mV input sine 35kHz signal, Gain = 8, VOUT measured at 1.65V, RL = 10kΩ		1		μs
TCPhDly	Phase Delay variation with Temperature	250mV input step signal, Gain = 8, Vout measured at Vdd/2		84		ns
SSBW	Small Signal Bandwidth	Gain = 32 V/V		360		kHz
Cin	Input Capacitance			5		pF
CLOAD, OUT	OUT Pin Load Capacitance	Series RC		1		μF
RLOAD, OUT	OUT Pin Load Resistance	Series RC		1		kΩ
<b>Combined Amplifier Chain Specification</b>						
en	Input-Referred Noise Density	Combination of both current and voltage noise, with a 86kΩ source impedance at 5Hz, Gain = 7986		30		nV/√Hz
	Input-Referred Integrated Noise	Combination of both current and voltage noise, with a 86kΩ source impedance 0.1Hz to 10Hz, Gain = 7986		0.1	0.12 <sub>(4)</sub>	μVrms
G	Gain	PGA1 GAIN = 42, PGA2 GAIN = 4		167		V/V
		PGA1 GAIN = 42, PGA2 GAIN = 8		335		
		PGA1 GAIN = 42, PGA2 GAIN = 16		669		
		PGA1 GAIN = 42, PGA2 GAIN = 32		1335		
		PGA1 GAIN = 250, PGA2 GAIN = 4		1002		
		PGA1 GAIN = 250, PGA2 GAIN = 8		2004		
		PGA1 GAIN = 250, PGA2 GAIN = 16		4003		
		PGA1 GAIN = 250, PGA2 GAIN = 32		7986		
GE	Gain Error	Any gain		5		%
TCCGE	Gain Temp Coefficient <sup>(5)</sup>				<b>100</b>	ppm/°C
PSRR	Power Supply Rejection Ratio	DC, 3.0V to 3.6V supply, gain = 1002V/V	90	110		dB
PhDly	Phase Delay	1mV input step signal, Gain = 1002, Vout measured at Vdd/2		9		μs
TCPhDly	Phase Delay variation with Temperature <sup>(6)</sup>	1mV input step signal, Gain=1002, Vout measured at Vdd/2			<b>500</b>	ns

(4) Specified by design and characterization. Not tested on shipped production material.

(5) TCCGE and TCVOS are calculated by taking the largest slope between -40°C and 25°C linear interpolation and 25°C and 85°C linear interpolation.

(6) TCPhDly is largest change in phase delay between -40°C and 25°C measurements and 25°C and 85°C measurements.

## Electrical Characteristics<sup>(1)</sup> (continued)

The following specifications apply for VDD = 3.3V, VCM = 1.15V, **Bold** values for T<sub>A</sub> = -40°C to +85°C unless otherwise specified. All other limits apply to T<sub>A</sub> = T<sub>J</sub> = +25°C.

Symbol	Parameter	Conditions	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
TCVOS	Output Offset Voltage Temperature Drift <sup>(5)</sup>	Gain = 167 V/V	−0.525		0.525	mV/°C
		Gain = 335 V/V	−0.60		0.60	
		Gain = 669 V/V	−0.90		0.90	
		Gain = 1335 V/V	−1.50		1.50	
		Gain = 1002 V/V	−1.20		1.20	
		Gain = 2004 V/V	−1.90		1.90	
		Gain = 4003 V/V	−3.70		3.70	
		Gain = 7986V/V	−7.10		7.10	
Common Mode Generator						
VCM	Common Mode Voltage	Programmable, see Common Mode Generation		1.15 or 2.59		V
	VCM accuracy			2		%
CLOAD	CMOut Load Capacitance			10		nF

## SPI Interface<sup>(1)</sup>

The following specifications apply for VDD = 3.3V, VCM = 1.15V, C<sub>L</sub> = 15pF, **Bold** values for T<sub>A</sub> = -40°C to +85°C unless otherwise specified. All other limits apply to T<sub>A</sub> = T<sub>J</sub> = +25°C.

Symbol	Parameter	Conditions	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
V <sub>IH</sub>	Logic Input High		0.7 × VDD			V
V <sub>IL</sub>	Logic Input Low				0.8	V
V <sub>OH</sub>	Logic Output High		2.6			V
V <sub>OL</sub>	Logic Output Low				0.4	V
I <sub>IH</sub> /I <sub>IL</sub>	Input Digital Leakage Current		-100 <b>-200</b>		100 <b>200</b>	nA

- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T<sub>J</sub> = T<sub>A</sub>. No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where T<sub>J</sub> > T<sub>A</sub>. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) Limits are 100% production tested at 25°C. Limits over the operating temperature range are ensured through correlations using statistical quality control (SQC) method.
- (3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not ensured on shipped production material.

## Timing Characteristics <sup>(1)</sup>

The following specifications apply for VDD = 3.3V, VCM = 1.15V, C<sub>L</sub> = 15pF, **Bold** values for T<sub>A</sub> = -40°C to +85°C unless otherwise specified. All other limits apply to T<sub>A</sub> = T<sub>J</sub> = +25°C.

Symbol	Parameter	Conditions	Min <sup>(2)</sup>	Typ <sup>(3)</sup>	Max <sup>(2)</sup>	Units
t <sub>WU</sub>	Wake up time			1		ms
f <sub>SCLK</sub>	Serial Clock Frequency				10	MHz


- (1) Electrical Table values apply only for factory testing conditions at the temperature indicated. Factory testing conditions result in very limited self-heating of the device such that T<sub>J</sub> = T<sub>A</sub>. No ensured specification of parametric performance is indicated in the electrical tables under conditions of internal self-heating where T<sub>J</sub> > T<sub>A</sub>. Absolute Maximum Ratings indicate junction temperature limits beyond which the device may be permanently degraded, either mechanically or electrically.
- (2) Limits are 100% production tested at 25°C. Limits over the operating temperature range are ensured through correlations using statistical quality control (SQC) method.
- (3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration. The typical values are not tested and are not ensured on shipped production material.

## Timing Characteristics <sup>(1)</sup> (continued)


The following specifications apply for VDD = 3.3V, VCM = 1.15V, C<sub>L</sub> = 15pF, **Bold** values for T<sub>A</sub> = -40°C to +85°C unless otherwise specified. All other limits apply to T<sub>A</sub> = T<sub>J</sub> = +25°C.

Symbol	Parameter	Conditions	Min (2)	Typ (3)	Max (2)	Units
t <sub>PH</sub>	SCLK Pulse Width High		0.4/f <sub>SCLK</sub>			ns
t <sub>PL</sub>	SCLK Pulse Width Low		0.4/f <sub>SCLK</sub>			ns
t <sub>CSS</sub>	CSB Setup Time		10			ns
t <sub>CSH</sub>	CSB Hold Time		10			ns
t <sub>SU</sub>	SDI Setup Time prior to rise edge of SCLK		10			ns
t <sub>SH</sub>	SDI Hold Time prior to rise edge of SCLK		10			ns
t <sub>DOD1</sub>	SDO Disable Time after rise edge of CSB				45	ns
t <sub>DOD2</sub>	SDO Disable Time after 16 <sup>th</sup> rise edge of SCLK				45	ns
t <sub>DOE</sub>	SDO Enable Time from the fall edge of 8 <sup>th</sup> SCLK				35	ns
t <sub>DOA</sub>	SDO Access Time after the fall edge of SCLK				35	ns
t <sub>DOH</sub>	SDO hold time after the fall edge of SCLK		5			ns
t <sub>DOR</sub>	SDO Rise time			5		ns
t <sub>DOF</sub>	SDO Fall time			5		ns


## Timing Diagrams

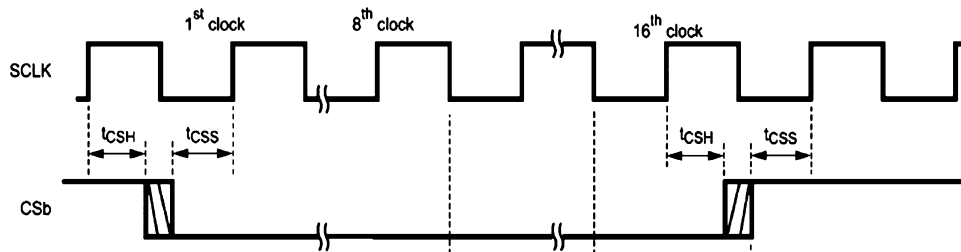


**Figure 3. SPI Timing Diagram**

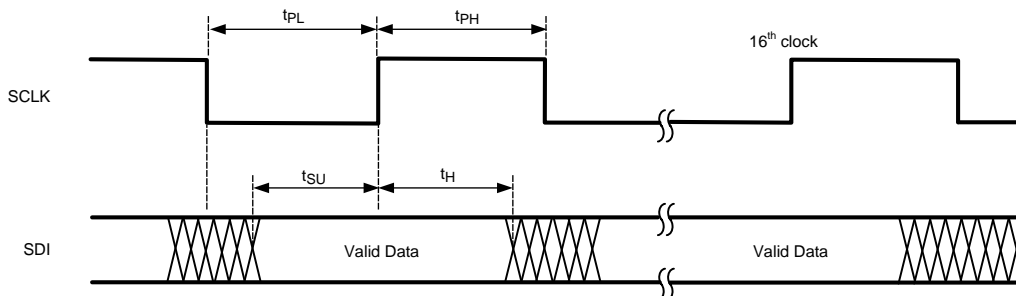


**Figure 4. SPI Set-up Hold Time**

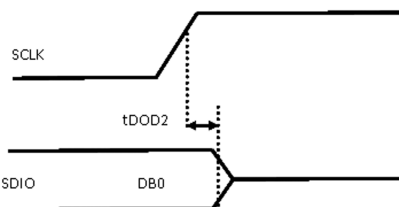


**Figure 5. SDO disable time after 16<sup>th</sup> rise edge of SCLK**

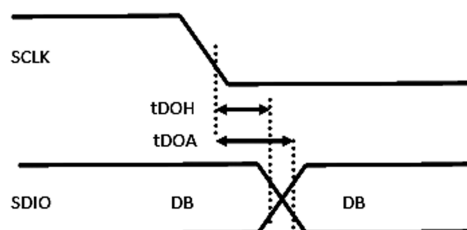


**Figure 6. SDO access time ( $t_{DOA}$ ) and SDO hold time ( $t_{DOH}$ ) after the fall edge of SCLK**

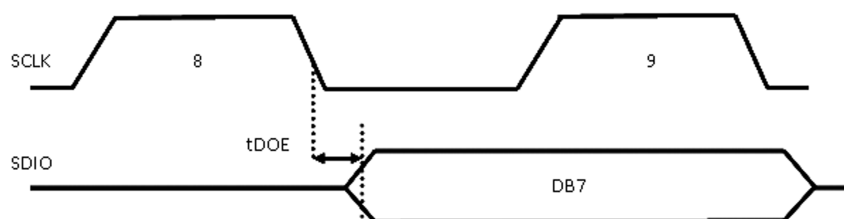

**Figure 7. SDO Enable time from the fall edge of 8<sup>th</sup> SCLK**

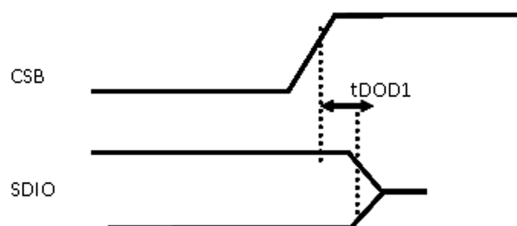

**Figure 8. SDO disable time after rise edge of CSB**

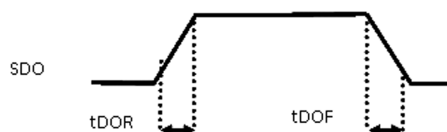

**Figure 9. SDO rise and fall times**



## Typical Performance Characteristics

VDD = +3.3V, VCM = 1.15V, and T<sub>A</sub> = 25°C unless otherwise noted

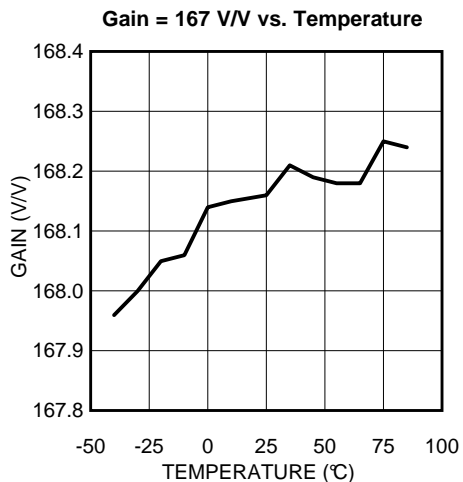


Figure 10.

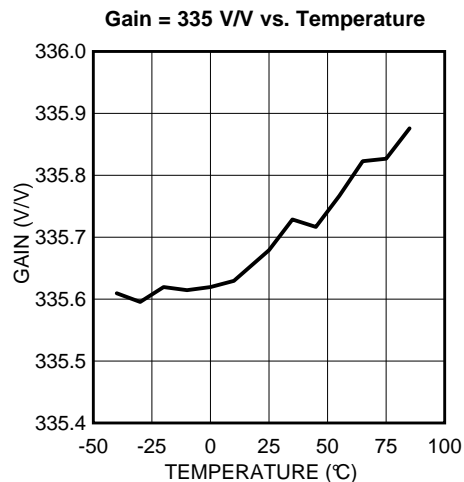


Figure 11.

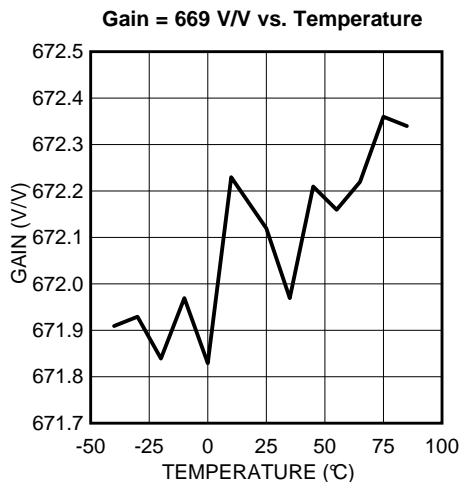


Figure 12.

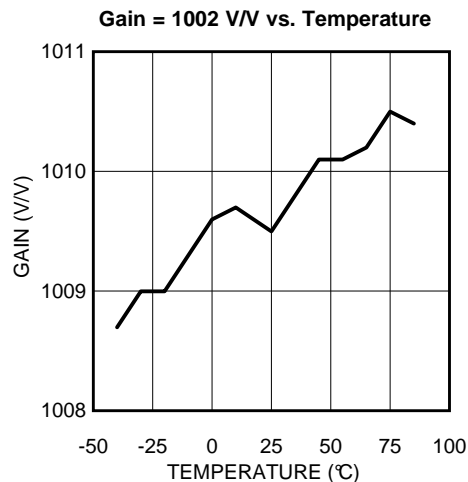


Figure 13.

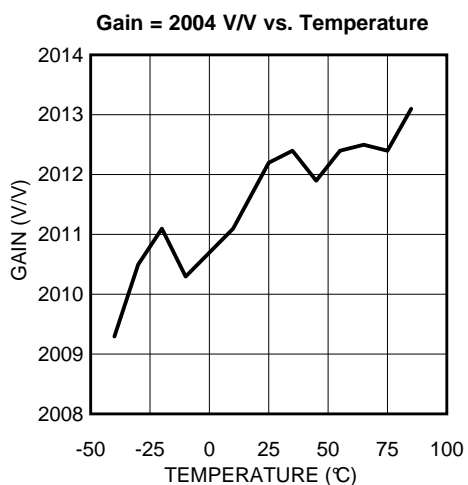


Figure 14.

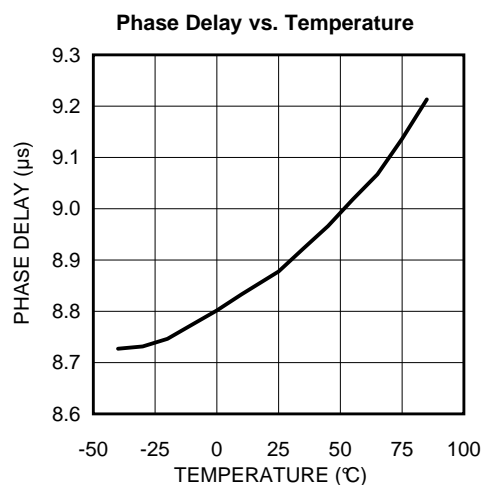


Figure 15.

## Typical Performance Characteristics (continued)

VDD = +3.3V, VCM = 1.15V, and T<sub>A</sub> = 25°C unless otherwise noted

Output Offset vs. Temperature

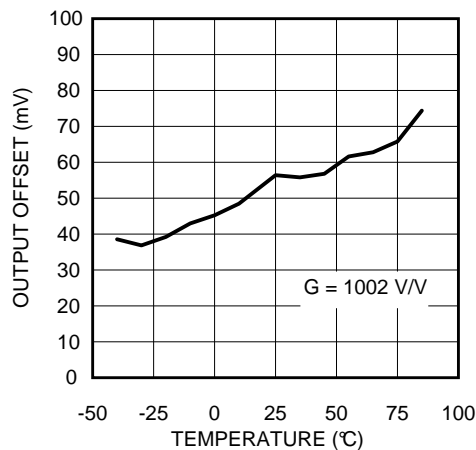


Figure 16.

Common Mode Voltage vs. Temperature

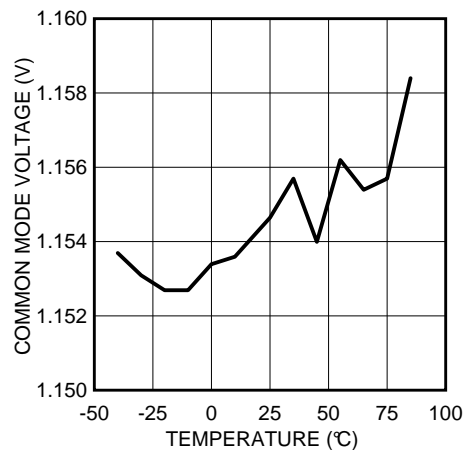


Figure 17.

Input Bias Current vs. Temperature

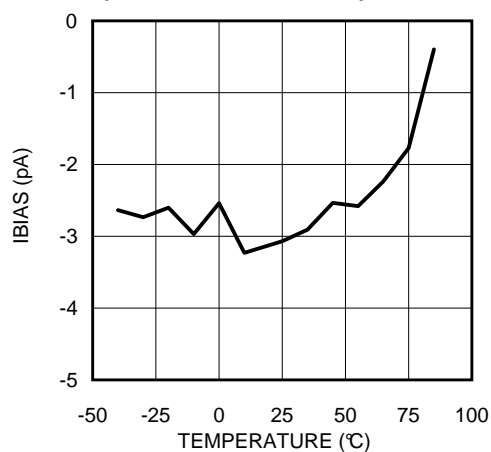


Figure 18.

Supply Current vs. Temperature

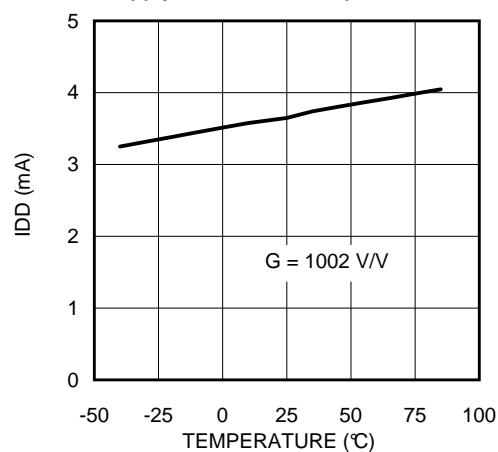


Figure 19.

Supply Current vs. Supply Voltage

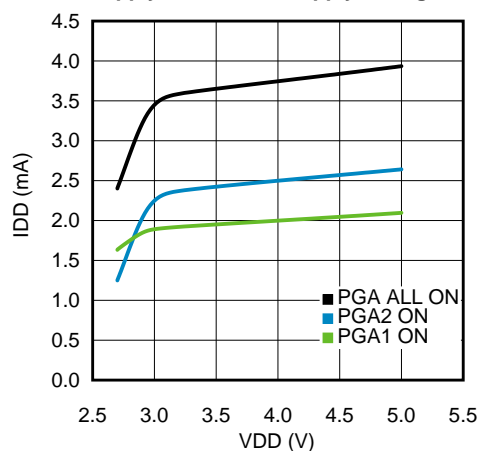


Figure 20.

Power Down Supply Current vs. Supply Voltage

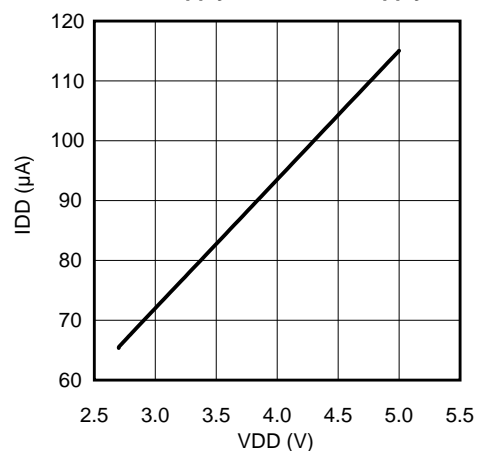


Figure 21.

## Typical Performance Characteristics (continued)

VDD = +3.3V, VCM = 1.15V, and T<sub>A</sub> = 25°C unless otherwise noted

**Output Offset vs. Supply Voltage**

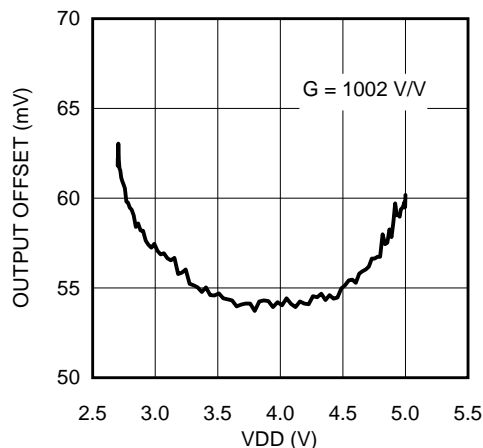


Figure 22.

**PGA1 Small Signal Bandwidth**

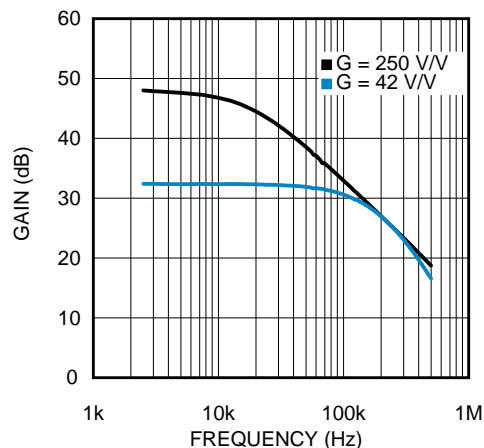


Figure 23.

**PGA2 Small Signal Bandwidth**

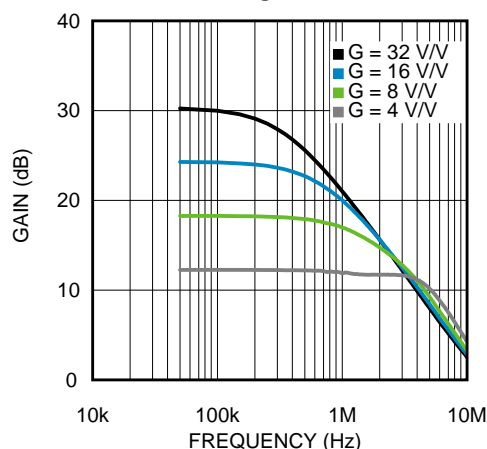


Figure 24.

**Power Supply Rejection Ratio vs. Frequency**

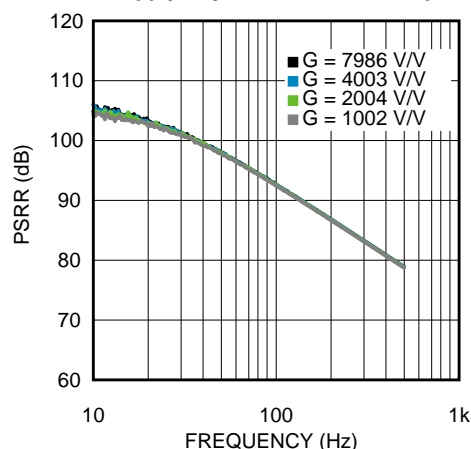


Figure 25.

**Input-Referred Noise Density vs. Frequency**

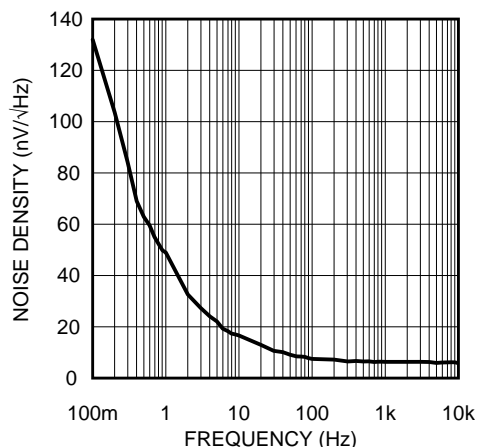


Figure 26.

**DAC DC Sweep**


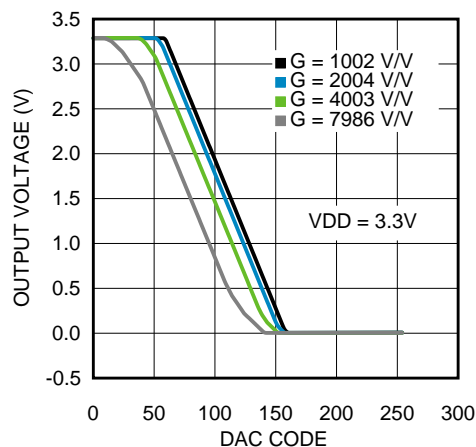


Figure 27.

**Typical Performance Characteristics (continued)**

VDD = +3.3V, VCM = 1.15V, and T<sub>A</sub> = 25°C unless otherwise noted

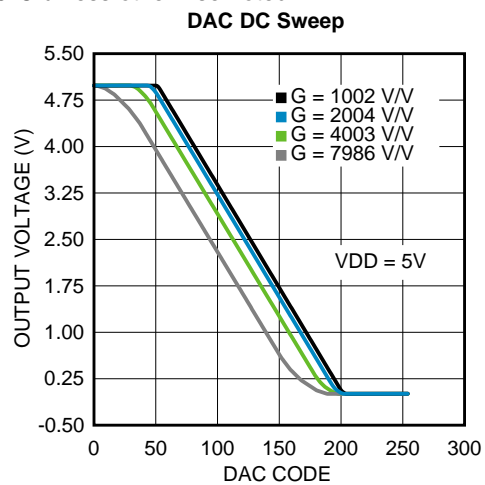

**Figure 28.**

## FUNCTIONAL DESCRIPTION

### PROGRAMMABLE GAIN AMPLIFIER

The LMP91050 offers two programmable gain modes (low/high) with four programmable gain settings each. The purpose of the gain mode is to enable thermopiles with larger dark voltage levels. All gain settings are accessible through bits GAIN1 and GAIN2[1:0]. The low gain mode has a range of 167 V/V to 1335 V/V while the high gain mode has a range of 1002 V/V to 7986 V/V. The PGA is referenced to the internally generated VCM. Input signal, referenced to this VCM voltage, should be within  $\pm 2\text{mV}$  (see VINMAX\_HGM specification) in high gain mode. In the low gain mode the first stage will provide a gain of 42 V/V instead of 250 V/V, thus allowing a larger maximum input signal up to  $\pm 12\text{mV}$  (VINMAX\_LGM).

Table 1. Gain Modes

Bit Symbol	Gain
GAIN1	<b>0: 250 (default)</b>
	1: 42
GAIN2 [1:0]	<b>00: 4 (default)</b>
	01: 8
	10: 16
	11: 32

### EXTERNAL FILTER

The LMP91050 offers two different measurement modes selectable through EXT\_FILT bit. EXT\_FILT bit is present in the Device configuration register and is programmable through SPI.

Table 2. Measurement Modes

Bit Symbol	Measurement Mode
EXT_FILT	<b>0: The signal from the thermopile is being processed by the internal PGAs, without additional external decoupling or filtering (default).</b>
	1: The signal from the thermopile is being processed by the first internal PGA and fed to the A0 pin. An external low pass, high pass or band pass filter can be connected through pins A0, A1.

An external filter can be applied when EXT\_FILT = 1. A typical band pass filter is shown in the picture below. Resistor and capacitor can be connected to the CMOUT pin of the LMP91050 as shown. Discrete component values have been added for reference.


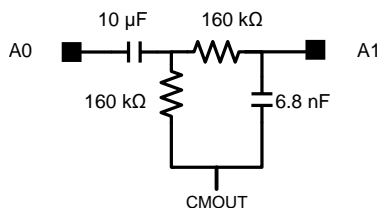


Figure 29. Typical Bandpass Filter

### OFFSET ADJUST

Procedure of the offset adjust is to first measure the “dark signal”, program the DAC to adjust, and then measure in a second cycle the residual of the dark signal for further signal manipulation within the  $\mu\text{C}$ . The signal source is expected to have an offset component (dark signal) larger than the actual signal. During the “dark phase”, the time when no light is detected by the sensor, the  $\mu\text{C}$  can program LMP91050 internal DAC to compensate for a measured offset. A low output offset voltage temperature drift (TCVOS) ensures system accuracy over temperature. See Figure 30 below which plots the maximum TCVOS allowed over a given temperature drift in order to achieve n bit system accuracy.

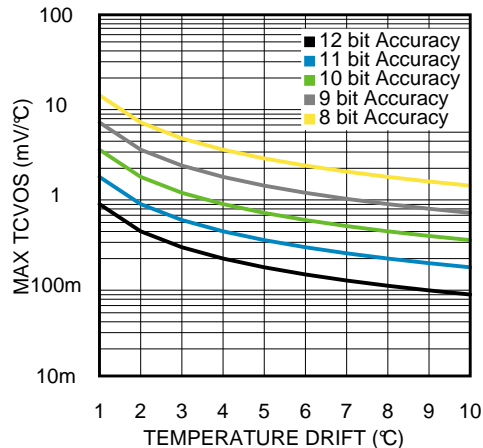

**Figure 30. System Accuracy vs. TCVOS and Temperature Drift**

## COMMON MODE GENERATION

As the sensor's offset is bipolar, there is a need to supply a VCM to the sensor. This can be programmed as 1.15V or 2.59V (approximately mid rail of 3.3V or 5V supply). It is not recommended to use 2.59V VCM with 3.3V supply

## SPI INTERFACE

An SPI interface is available in order to program the device parameters like PGA gain of two stages, enabling external filter, enabling power for PGAs, offset adjust and common mode (VCM) voltage.

### Interface Pins

The Serial Interface consists of SDIO (Serial Data Input / Output), SCLK (Serial Interface Clock) and CSB (Chip Select Bar). The serial interface is write-only by default. Read operations are supported after unlocking the SDIO\_MODE\_PASSWD. This is discussed in detail later in the document.

### CSB

Chip Select is a active-low signal. CSB needs to be asserted throughout a transaction. That is, CSB should not pulse between the Instruction Byte and the Data Byte of a single transaction.

Note that CSB de-assertion always terminates an on-going transaction, if it is not already complete. Likewise, CSB assertion will always bring the device into a state, ready for next transaction, regardless of the termination status of a previous transaction.


CSB may be permanently tied low for a 2-wire SPI communication protocol.

### SCLK

SCLK can idle High or Low for a write transaction. However, for a READ transaction, SCLK should idle high. SCLK features a Schmitt-triggered input and although it has hysteresis, it is recommended to keep SCLK as clean as possible to prevent glitches from inadvertently spoiling the SPI frame.

### Communication Protocol


Communication on the SPI normally involves Write and Read transactions. Write transaction consists of single Write Command Byte, followed by single Data byte. The following figure shows the SPI Interface Protocol for write transaction.

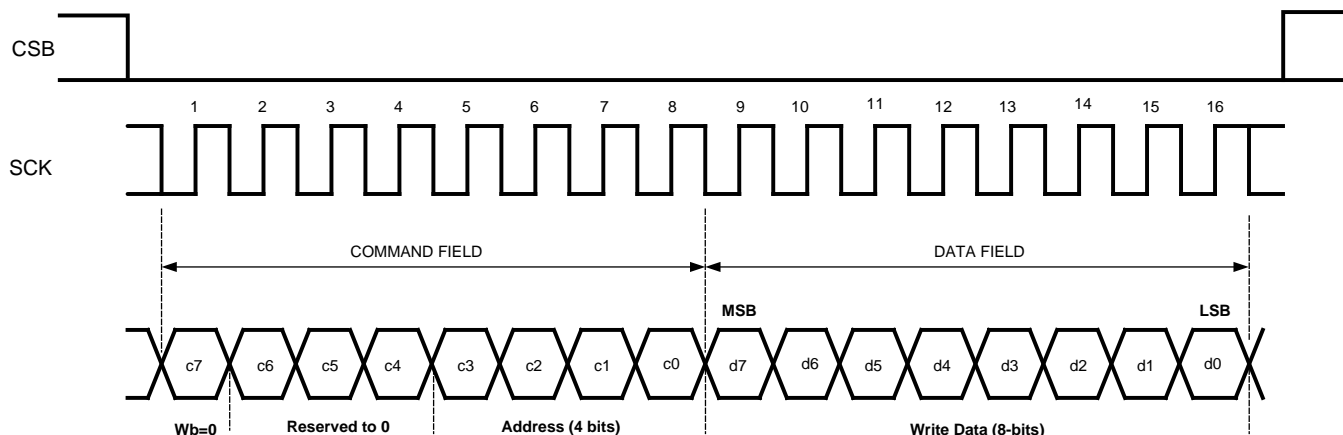

**Figure 31. SPI Interface Protocol**


For Read transactions, user first needs to write into a SDIO mode enable register for enabling the SPI read mode. Once the device is enabled for Reading, the data is driven out on the SDIO pin during the Data field of the Read Transaction. SDIO pin is designed as a bidirectional pin for this purpose. [Figure 32](#) shows the Read transaction. The sequence of commands that need to be issued by the SPI Master to enable SPI read mode is illustrated in [Figure 33](#).

#### READ TRANSACTION

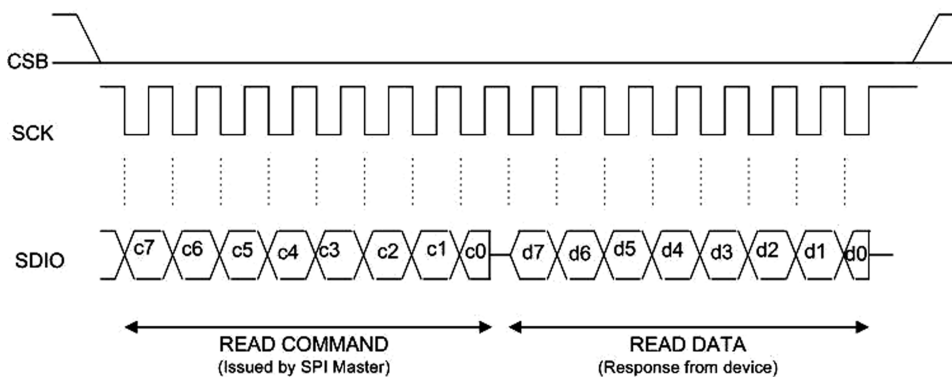

Note: Read command is issued by the SPI Master, who after issuing the c0 (LSBit of the command byte) bit should relinquish the data line (high-Z) after meeting the hold timing(10ns) and stop SCK idling high.

**Figure 32. Read Transaction**

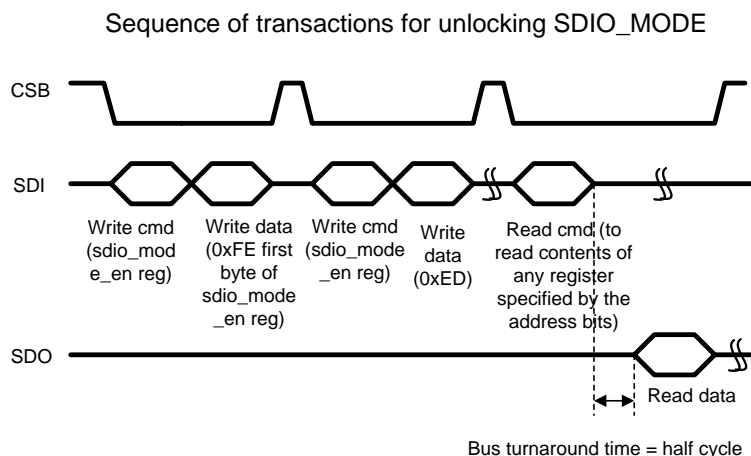**Note:**

1. Once the SDIO\_mode is unlocked. The user can read as many registers as long as nothing else is written to sdio\_mode\_en register to disturb the state of SDIO\_mode
2. The separate signals SDI and SDO are given in the figure for the sake of understanding. However, only one signal SDIO exists in the design

**Figure 33. Enable SDIO Mode for reading SPI registers****Registers Organization**

Configuring the device is achieved using 'Write' of the designated registers in the device. All the registers are organized into individually addressable byte-long registers that have a unique address. The format of the Write/Read instruction is as shown below.

**Table 3. Write / Read Instruction Format**

Bit[7]	Bit[6:4]	Bit[3:0]
0 : Write Instruction	Reserved to 0	Address
1 : Read Instruction		

**REGISTERS**

This section describes the programmable registers and the associated programming sequence, if any, for the device. The following table shows the summary listing of all the registers that are available to the user and their power-up values.

Title	Address (Hex)	Type	Power-up/Reset Value (Hex)
Device Configuration	0x0	Read-Write	0x0
		(Read allowed in SDIO Mode)	
DAC Configuration	0x1	Read-Write	0x80
		(Read allowed in SDIO Mode)	
SDIO Mode Enable	0xF	Write-only	0x0

**Device Configuration – Device Configuration Register (Address 0x0)**

Bit	Bit Symbol	Description
7	RESERVED	Reserved to 0.



Bit	Bit Symbol	Description
[6:5]	EN	<b>00: PGA1 OFF PGA2 OFF (default)</b>
		01: PGA1 OFF, PGA2 ON
		10: PGA1 ON, PGA2 OFF
		11: PGA1 ON, PGA2 ON
4	EXT_FILT	<b>0: PGA1 to PGA2 direct (default)</b>
		1: PGA1 to PGA2 via external filter
3	CMN_MODE	<b>0 : 1.15V (default)</b>
		1 : 2.59V
[2:1]	GAIN2	<b>00: 4 (default)</b>
		01: 8
		10: 16
		11: 32
0	GAIN1	<b>0: 250 (default)</b>
		1: 42

### **DAC Configuration – DAC Configuration Register (Address 0x1)**

The output DC level will shift according to the formula  $V_{out\_shift} = -33.8mV * (NDAC - 128)$ .

Bit	Bit Symbol	Description
[7:0]	NDAC	128 (0x80): $V_{out\_shift} = -33.8mV * (128 - 128) = 0mV$ (default)

### **SDIO Mode – SDIO Mode Enable Register (Address 0xf)**

Write-only

Bit	Bit Symbol	Description
[7:0]	SDIO_MODE_EN	To enter SDIO Mode, write the successive sequence 0xFE and 0xED.
		Write anything other than this sequence to get out of mode.

## REVISION HISTORY

### Changes from Revision C (March 2013) to Revision D

### Page

- Changed layout of National Data Sheet to TI format ..... [17](#)

## PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
LMP91050MM/NOPB	ACTIVE	VSSOP	DGS	10	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 105	AN8A	<a href="#">Samples</a>
LMP91050MME/NOPB	ACTIVE	VSSOP	DGS	10	250	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 105	AN8A	<a href="#">Samples</a>
LMP91050MMX/NOPB	ACTIVE	VSSOP	DGS	10	3500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 105	AN8A	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMP91050MM/NOPB	VSSOP	DGS	10	1000	178.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP91050MME/NOPB	VSSOP	DGS	10	250	178.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMP91050MMX/NOPB	VSSOP	DGS	10	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMP91050MM/NOPB	VSSOP	DGS	10	1000	210.0	185.0	35.0
LMP91050MME/NOPB	VSSOP	DGS	10	250	210.0	185.0	35.0
LMP91050MMX/NOPB	VSSOP	DGS	10	3500	367.0	367.0	35.0

## DGS (S-PDSO-G10)

## PLASTIC SMALL-OUTLINE PACKAGE



- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion.
  - Falls within JEDEC MO-187 variation BA.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct    +86 (21) 6401-6692  
Email     amall@ameya360.com  
QQ        800077892  
Skype     ameyasales1 ameyasales2

➤ Customer Service :

Email     service@ameya360.com

➤ Partnership :

Tel        +86 (21) 64016692-8333  
Email     mkt@ameya360.com