

WaveAce™ Oscilloscopes

40 MHz–200 MHz

Debug With Confidence




THE TOOLS AND FEATURES FOR ALL YOUR DEBUG NEEDS

Key Features

- 40 MHz, 60 MHz, 100 MHz, and 200 MHz bandwidths
- Sample rates up to 2 GS/s
- Long Waveform Memory—up to 10 kpts/Ch (20 kpts interleaved)
- Advanced Triggering—Edge, Pulse Width, Video, Slope (Rise Time)
- 5.7" color display on all models
- 32 automatic measurements
- Multi-language User Interface and Context Sensitive Help
- Large internal waveform and setup storage
- Four math functions plus FFT
- USB host and device connections for printers, memory sticks and PC remote control

A good oscilloscope should simplify how you work and shorten the time it takes to find and debug problems. The WaveAce™ combines long memory, a color display, extensive measurement capabilities, advanced triggering and excellent connectivity to improve troubleshooting and shorten debug time. With bandwidths from 40 MHz to 200 MHz, sample rates up to 2 GS/s and waveform memory up to 10 kpts/Ch (20 kpts interleaved) the WaveAce exceeds all expectations of a small affordable oscilloscope.

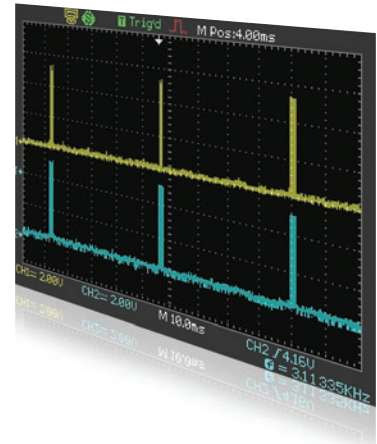

Long Capture and Zoom


Small, portable oscilloscopes often suffer from short capture time due to the small waveform memory. The WaveAce is available in 4 kpts/Ch and 10 kpts/Ch configurations which is up two to three times more than competitive products. More memory results in longer capture times showing more waveform detail with each trigger. Activate the built-in zoom function to take a closer look at the details.

Digital Filter

Digital filtering is available on each channel of the WaveAce. The Low-Pass, High-Pass, Band-Pass and Band-Stop filters allow you to isolate only the frequencies you want to see.


Trigger

Edge triggering is not always the best choice for every signal. Beyond the basic edge trigger is a set of trigger capabilities which include Pulse Width, Video and Slope (Rise Time) triggers.

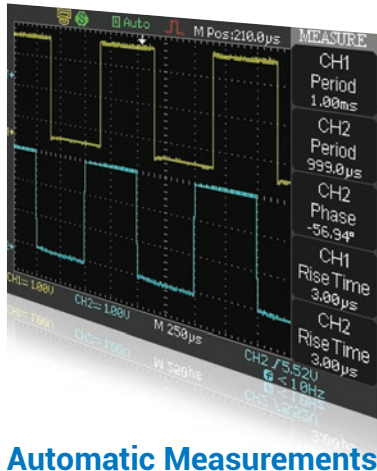


Automatic Measurements

With 32 standard automatic measurements the WaveAce simplifies how you work. Display up to five measurements without crowding the waveform display or show all 32 at once with the measurement dashboard. A wide range of advanced timing parameters provide insight to the relationship between two different signals.

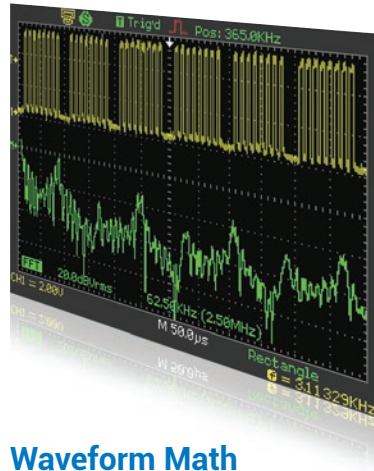


Waveform Math

The WaveAce provides five math functions including Add, Subtract, Multiply, Divide and FFT. The FFT capability includes the choices of four windows and two different vertical scales.

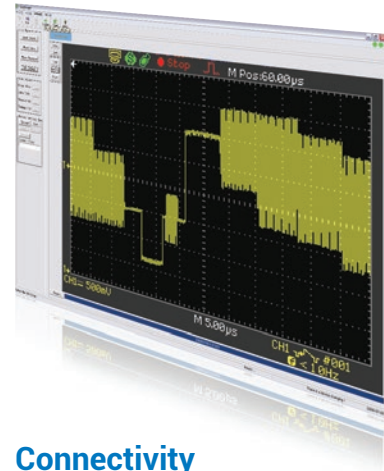


Connectivity

The WaveAce provides a USB host port on the front panel for saving screen images, waveforms and setups to a memory stick. A rear panel USB device port allows for connection to a PC or printer. Connecting and communicating with a PC is simplified with EasyScope software providing full access to the oscilloscope's display, measurements, waveform data and front panel controls.

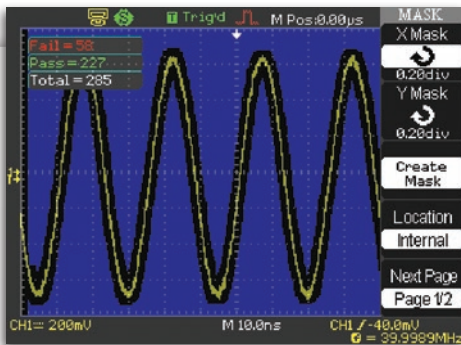

Pass/Fail Test

With built-in Pass/Fail Mask testing the WaveAce can quickly identify problems and let you know when they occur. A history of the P/F results can be displayed on the screen.

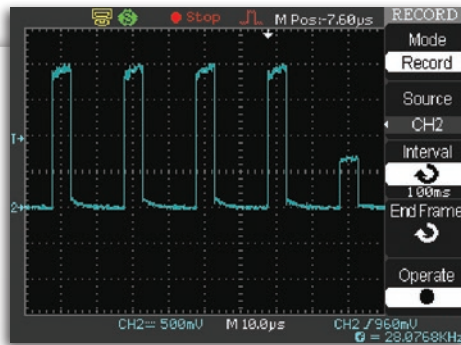

Waveform Sequence Recorder

Capture and replay a sequence of up to 2500 waveforms to isolate that runt or glitch which is causing problems in your system.

Large Internal Storage

Saving and recalling waveforms and setups from internal memory can save a lot of time during test and debug. The WaveAce can save up to 20 waveforms, 20 setups and two reference waveforms to the internal memory.

Acquisition Modes

Different applications call for different acquisitions modes. The WaveAce offers Real Time, Equivalent Time, Peak Detect and Averaging modes to ensure that any waveform can be captured and displayed.

SMART, SIMPLE, EFFICIENT

1. Fast Power Up

The WaveAce turns on and is ready for use in under 10 seconds.

2. Display

All WaveAce models have a 5.7" color display.

3. Connectivity

Saving waveforms, screenshots and setups is easy with the front panel USB port for use with a memory stick.

4. Portability

The small compact form factor is lightweight and only 5" deep.

5. Communication

Rear panel USB and RS-232 ports enable direct remote control from a PC. The USB port also allows for connecting to a printer.




6. Intensity

Waveform intensity can be quickly adjusted by rotating this knob, a meter on the display will appear and show the current setting.

7. Individual Vertical Controls

Quickly change the vertical scale of either channel.

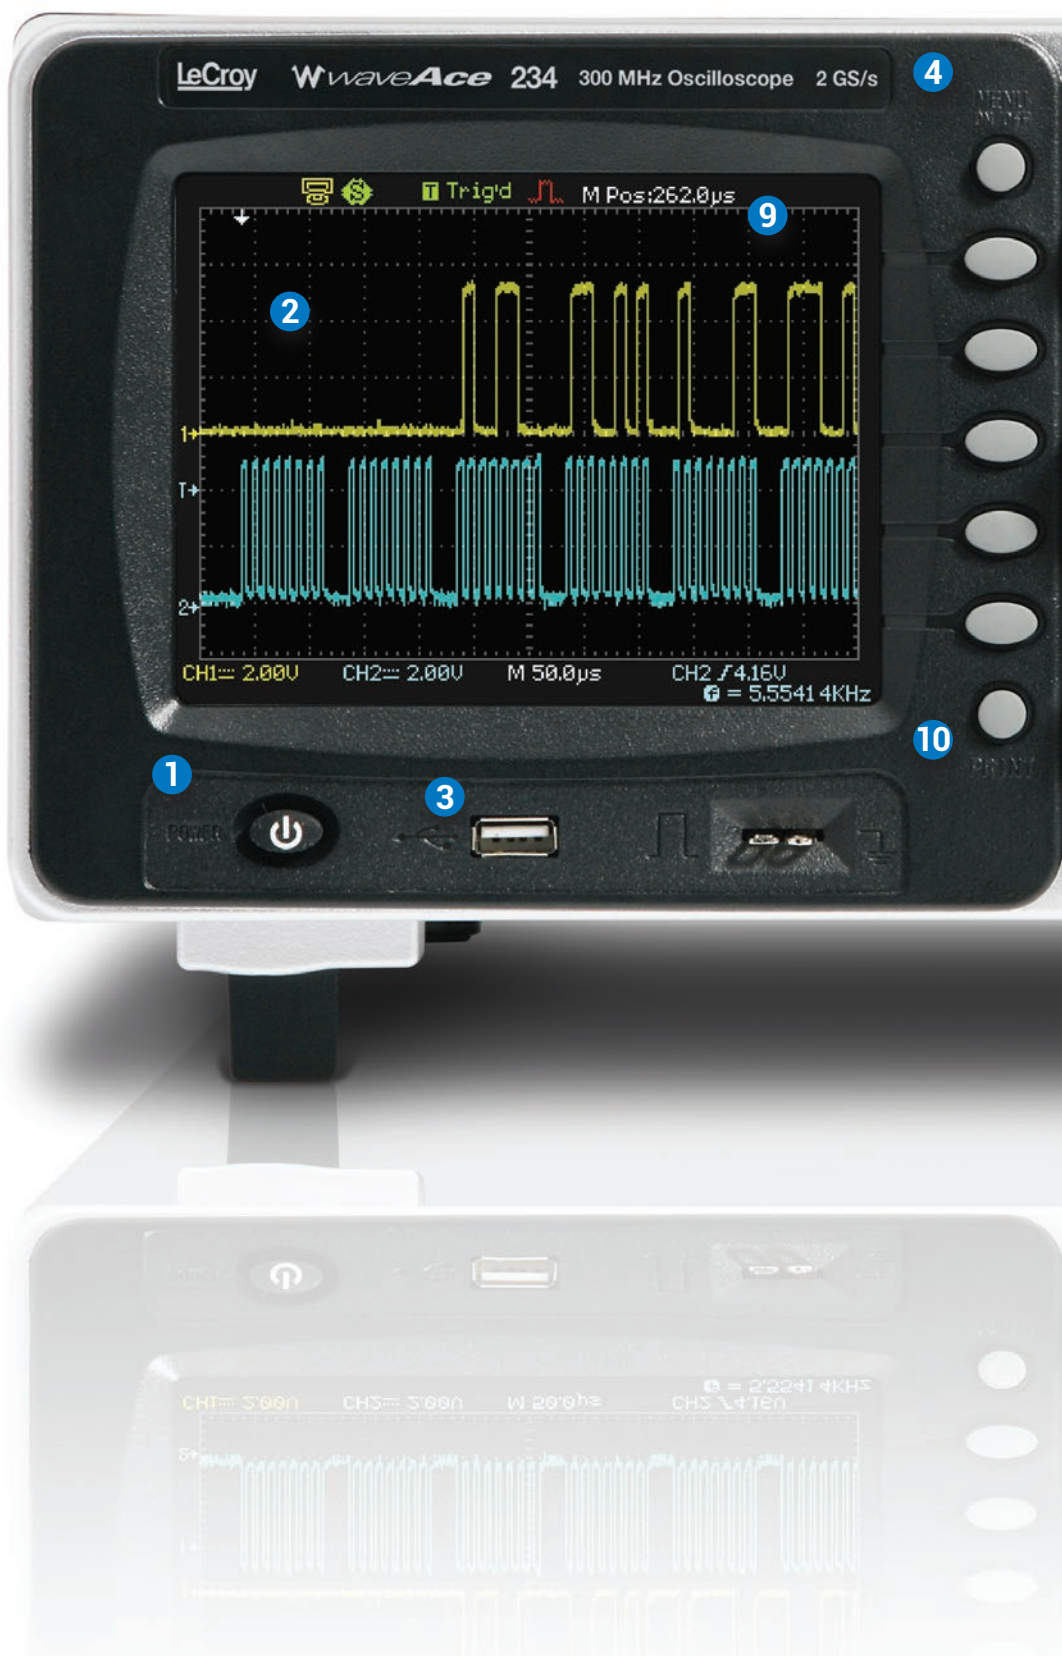



8. Push Knobs

All WaveAce knobs can be pushed for additional capabilities. Push the V/div knobs to toggle between fixed and variable gain. Push the T/div knob to enter zoom mode and push the position knobs to center the waveform on screen.

9. Local Language User Interface

The intuitive user interface is available in several different languages.

10. Front Panel Print Button

Saving or Printing screenshots requires only a single button press.

11. Backlit Menu Buttons

When using certain features like Cursors or Measurements the button remains lit for easy menu navigation.

12. Context Sensitive Help

Press any button or turn any knob while in help mode and a pop-up window displays the functionality of that control.

13. Auto Setup

Quickly configures the vertical, horizontal and trigger settings for the WaveAce. Choose to view the waveform as multi-cycle, single-cycle, rising or falling edge.



WAVEACE 100 SPECIFICATIONS

| | WaveAce 101 | WaveAce 102 |
|---------------------------------|--|-------------------|
| Bandwidth | 40 MHz | 60 MHz |
| Rise Time | 8.8 ns | 5.8 ns |
| Input Channels | 2 | 2 |
| Display | 5.7" Color, 320 x 240 Resolution | |
| Sampling Rate (Single Shot) | 500 MS/s (interleaved), 250 MS/s (all channels) | |
| Sampling Rate (Equivalent Time) | 50 GS/s | |
| Peak Detect Period | 10 ns | |
| Memory Length | 4 kpts/Ch | |
| Maximum Memory | 4 kpts | |
| Vertical Resolution | 8-bits | |
| Vertical Sensitivity | 2 mV/div–5 V/div | |
| Bandwidth Limiting Filter | 20 MHz | |
| Maximum Input Voltage | 400 V _{pk} , 300 V _{rms} | |
| Input Coupling | GND, DC 1 M Ω , AC 1 M Ω | |
| Input Impedance | 1 M Ω 13 pF | |
| Probes | 10:1, 1:1 Switchable Passive Probe (one per channel) | |
| Timebase Range | 10 ns/div–50 s/div | 5 ns/div–50 s/div |

Triggering

| | |
|----------|--|
| Triggers | Edge, Pulse Width, Video, Slope (Rise Time), Alternate |
|----------|--|

Measure, Math and Wave Recorder

| | |
|----------------------------|---|
| Measure | Amplitude, Average, Base, Burst Width, Cyclic RMS, + Duty Cycle, - Duty Cycle, Fall Time, Frequency, Max, Mean, Min, Overshoot, Peak-Peak, Period, Phase, Rise Time, RMS, Top, + Width, - Width. Plus 8 advanced parameters for edge to edge timing measurements |
| Math | Add, Subtract, Multiply, Divide, FFT (up to 1 kpts with Rectangular, Von Hann, Hamming or Blackman windows) |
| Waveform Sequence Recorder | Record and playback a sequence of up to 2500 waveforms |

Input/Output Interfaces

| | |
|--------|---|
| USB | USB host port for flash drives, USB device port for connecting to PC and printers |
| RS-232 | RS-232 port for connection to PC and EasyScope software |

Physical

| | |
|------------------|---|
| Dimensions (HWD) | 154 mm x 305 mm x 133 mm; 6" x 12" x 5.25" (height excludes feet) |
| Weight | 2.3 kg; 5 lbs. |

WAVEACE 200 SPECIFICATIONS

| | WaveAce 202 | WaveAce 204 | WaveAce 212 | WaveAce 214 | WaveAce 222 | WaveAce 224 |
|---------------------------------|--|----------------|---------------------|----------------|--|----------------|
| Bandwidth | 60 MHz | 60 MHz | 100 MHz | 100 MHz | 200 MHz | 200 MHz |
| Rise Time | 5.8 ns | 5.8 ns | 3.5 ns | 3.5 ns | 1.75 ns | 1.75 ns |
| Input Channels | 2 | 4 | 2 | 4 | 2 | 4 |
| Display | 5.7" Color, 320 x 240 Resolution | | | | | |
| Sampling Rate (Single Shot) | 1 GS/s (all channels) | | | | 2 GS/s (interleaved), 1 GS/s (all channels) | |
| Sampling Rate (Equivalent Time) | 50 GS/s | | | | | |
| Peak Detect Period | 2.5 ns | | | | | |
| Memory Length | 9 kpts/Ch | 10 kpts/Ch | 9 kpts/Ch | 10 kpts/Ch | 9 kpts/Ch | 10 kpts/Ch |
| Maximum Memory (Interleaved) | 18 kpts | 20 kpts | 18 kpts | 20 kpts | 18 kpts | 20 kpts |
| Vertical Resolution | 8-bits | | | | | |
| Vertical Sensitivity | 2 mV/div–5 V/div | | | | | |
| Bandwidth Limiting Filter | 20 MHz | | | | | |
| Maximum Input Voltage | 400 V _{pk} , 300 V _{rms} | | | | 400 V _{pk} , 300 V _{rms} (1 MΩ), 5 V _{rms} (50 Ω) | |
| Input Coupling | GND, DC 1 MΩ, AC 1 MΩ | | | | GND, DC 1 MΩ, AC 1 MΩ, 50 Ω | |
| Input Impedance | 1 MΩ 13 pF | | | | 1 MΩ 13 pF, 50 Ω | |
| Probes | 10:1, 1:1 Switchable Passive Probe (one per channel) | | | | | |
| Timebase Range | 5 ns/div–50 s/div | | 2.5 ns/div–50 s/div | | | |

Triggering

| | |
|----------|--|
| Triggers | Edge, Pulse Width, Video, Slope (Rise Time), Alternate |
|----------|--|

Measure, Math and Wave Recorder

| | |
|----------------------------|---|
| Measure | Amplitude, Average, Base, Burst Width, Cyclic RMS, + Duty Cycle, - Duty Cycle, Fall Time, Frequency, Max, Mean, Min, Overshoot, Peak-Peak, Period, Phase, Rise Time, RMS, Top, + Width, - Width. Plus 8 advanced parameters for edge to edge timing measurements |
| Math | Add, Subtract, Multiply, Divide, FFT (up to 1 kpts with Rectangular, Von Hann, Hamming or Blackman windows) |
| Waveform Sequence Recorder | Record and playback a sequence of up to 2500 waveforms |

Input/Output Interfaces

| | |
|--------|---|
| USB | USB host port for flash drives, USB device port for connecting to PC and printers |
| RS-232 | RS-232 port for connection to PC and EasyScope software (2 Channel models only) |
| LAN | LAN port for connection to PC and EasyScope software (4 Channel models only) |

Physical

| | |
|--------------------|---|
| 2 Ch Models | |
| Dimensions (HWD) | 154 mm x 305 mm x 133 mm; 6" x 12" x 5.25" (height excludes feet) |
| Weight | 2.3 kg; 5 lbs. |
| 4 Ch Models | |
| Dimensions (HWD) | 159 mm x 336 mm x 133 mm; 6.3" x 13.2" x 5.25" (height excludes feet) |
| Weight | 3 kg; 6.6 lbs. |

ORDERING INFORMATION

Ordering Information

| Product Description | Product Code |
|---|--------------|
| 40 MHz, 250 MS/s, 2 Ch, 4 kpts/Ch with 5.7" Color Display. 500 MS/s Interleaved, 1 M Ω Input | WaveAce 101 |
| 60 MHz, 250 MS/s, 2 Ch, 4 kpts/Ch with 5.7" Color Display. 500 MS/s Interleaved, 1 M Ω Input | WaveAce 102 |
| 60 MHz, 1 GS/s, 2 Ch, 9 kpts/Ch with 5.7" Color Display. 18 kpts Interleaved. 1 M Ω Input | WaveAce 202 |
| 60 MHz, 1 GS/s, 4 Ch, 10 kpts/Ch with 5.7" Color Display. 20 kpts Interleaved. 1 M Ω Input | WaveAce 204 |
| 100 MHz, 1 GS/s, 2 Ch, 9 kpts/Ch with 5.7" Color Display. 18 kpts Interleaved. 1 M Ω Input | WaveAce 212 |
| 100 MHz, 1 GS/s, 4 Ch, 10 kpts/Ch with 5.7" Color Display. 20 kpts Interleaved. 1 M Ω Input | WaveAce 214 |
| 200 MHz, 1 GS/s, 2 Ch, 9 kpts/Ch with 5.7" Color Display. 18 kpts, 2 GS/s Interleaved. 50/1 M Ω Input | WaveAce 222 |
| 200 MHz, 1 GS/s, 4 Ch, 10 kpts/Ch with 5.7" Color Display. 20 kpts, 2 GS/s Interleaved. 50/1 M Ω Input | WaveAce 224 |

| Product Description | Product Code |
|--|--------------|
| Included with Standard Configuration | |
| One Passive Probe per Channel | |
| Multi-language User-interface and Help (English, French, German, Italian, Japanese, Korean, Russian, Simplified Chinese, Spanish, Traditional Chinese) | |
| EasyScope PC Software with USB Cable | |
| Getting Started Manual | |
| Protective Front Cover (4 channel models only) | |
| Calibration and Performance Certificate | |
| 3-year Warranty | |

Accessories

| | |
|--|-------------|
| Soft Carrying Case for WaveAce Oscilloscopes | WA-SOFTCASE |
|--|-------------|

Customer Service

Teledyne LeCroy oscilloscopes and probes are designed, built, and tested to ensure high reliability. In the unlikely event you experience difficulties, our digital oscilloscopes are fully warranted for three years and our probes are warranted for one year.

This warranty includes:

- No charge for return shipping
- Long-term 7-year support
- Upgrade to latest software at no charge

For more information, please contact:



1-800-5-LeCroy
teledynelecroy.com

Local sales offices are located throughout the world.
Visit our website to find the most convenient location.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com