
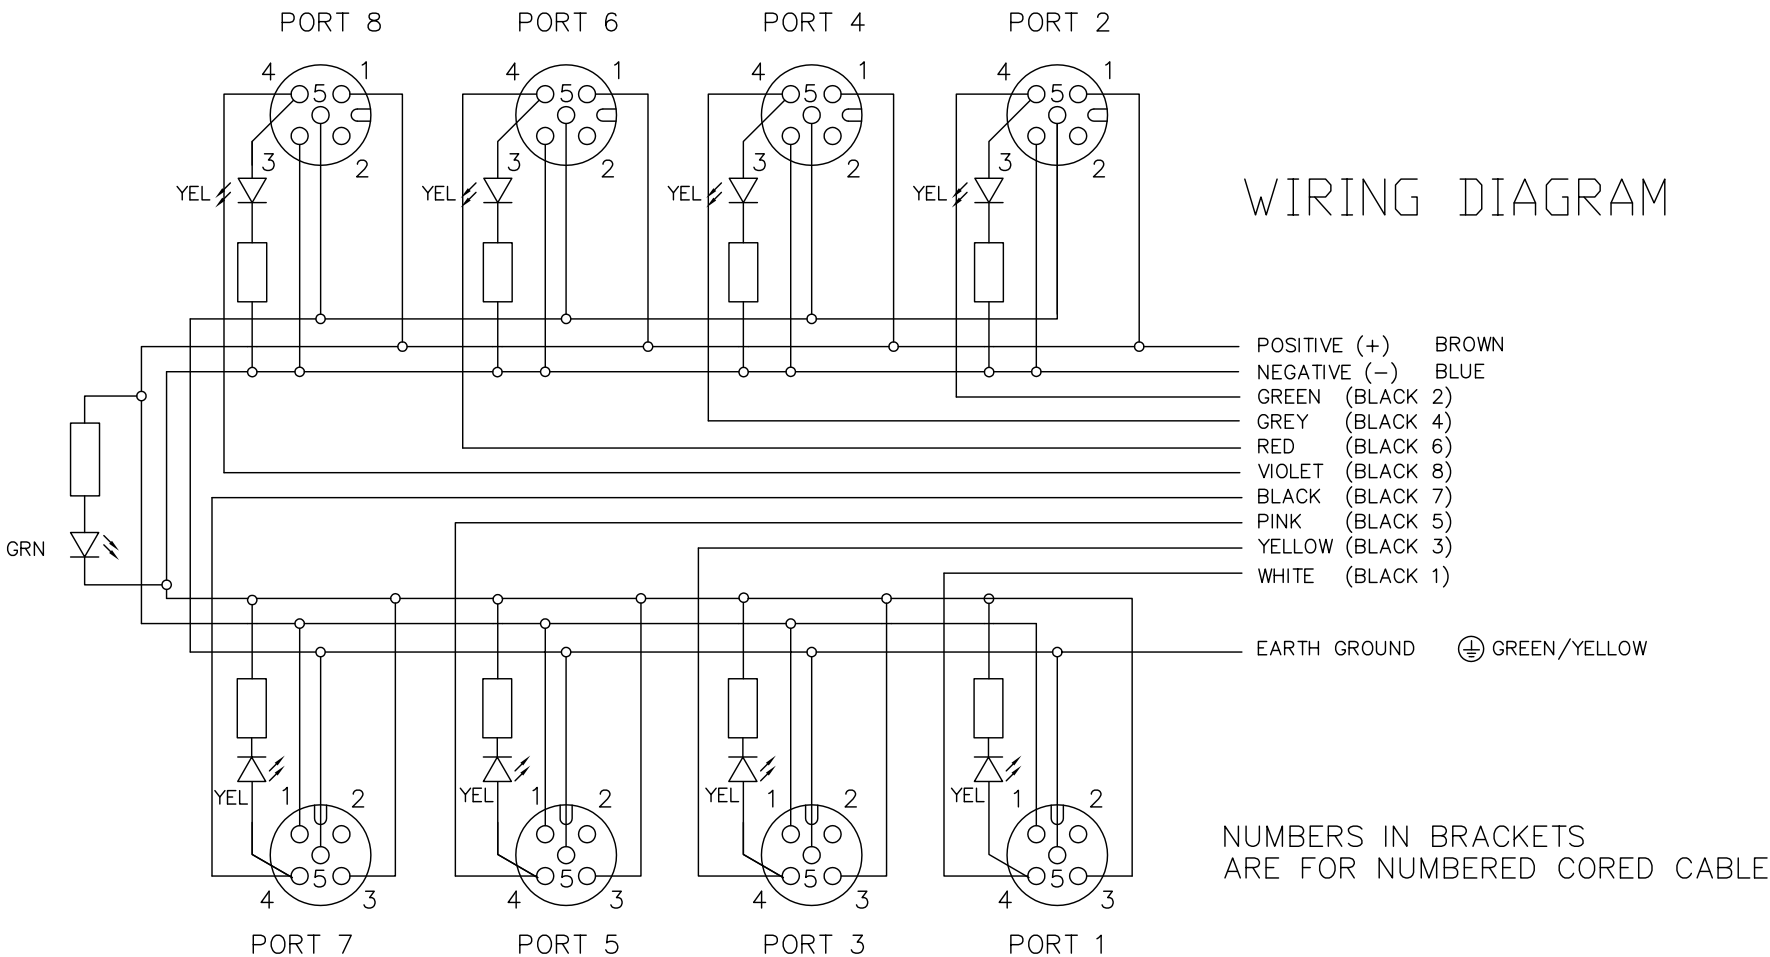
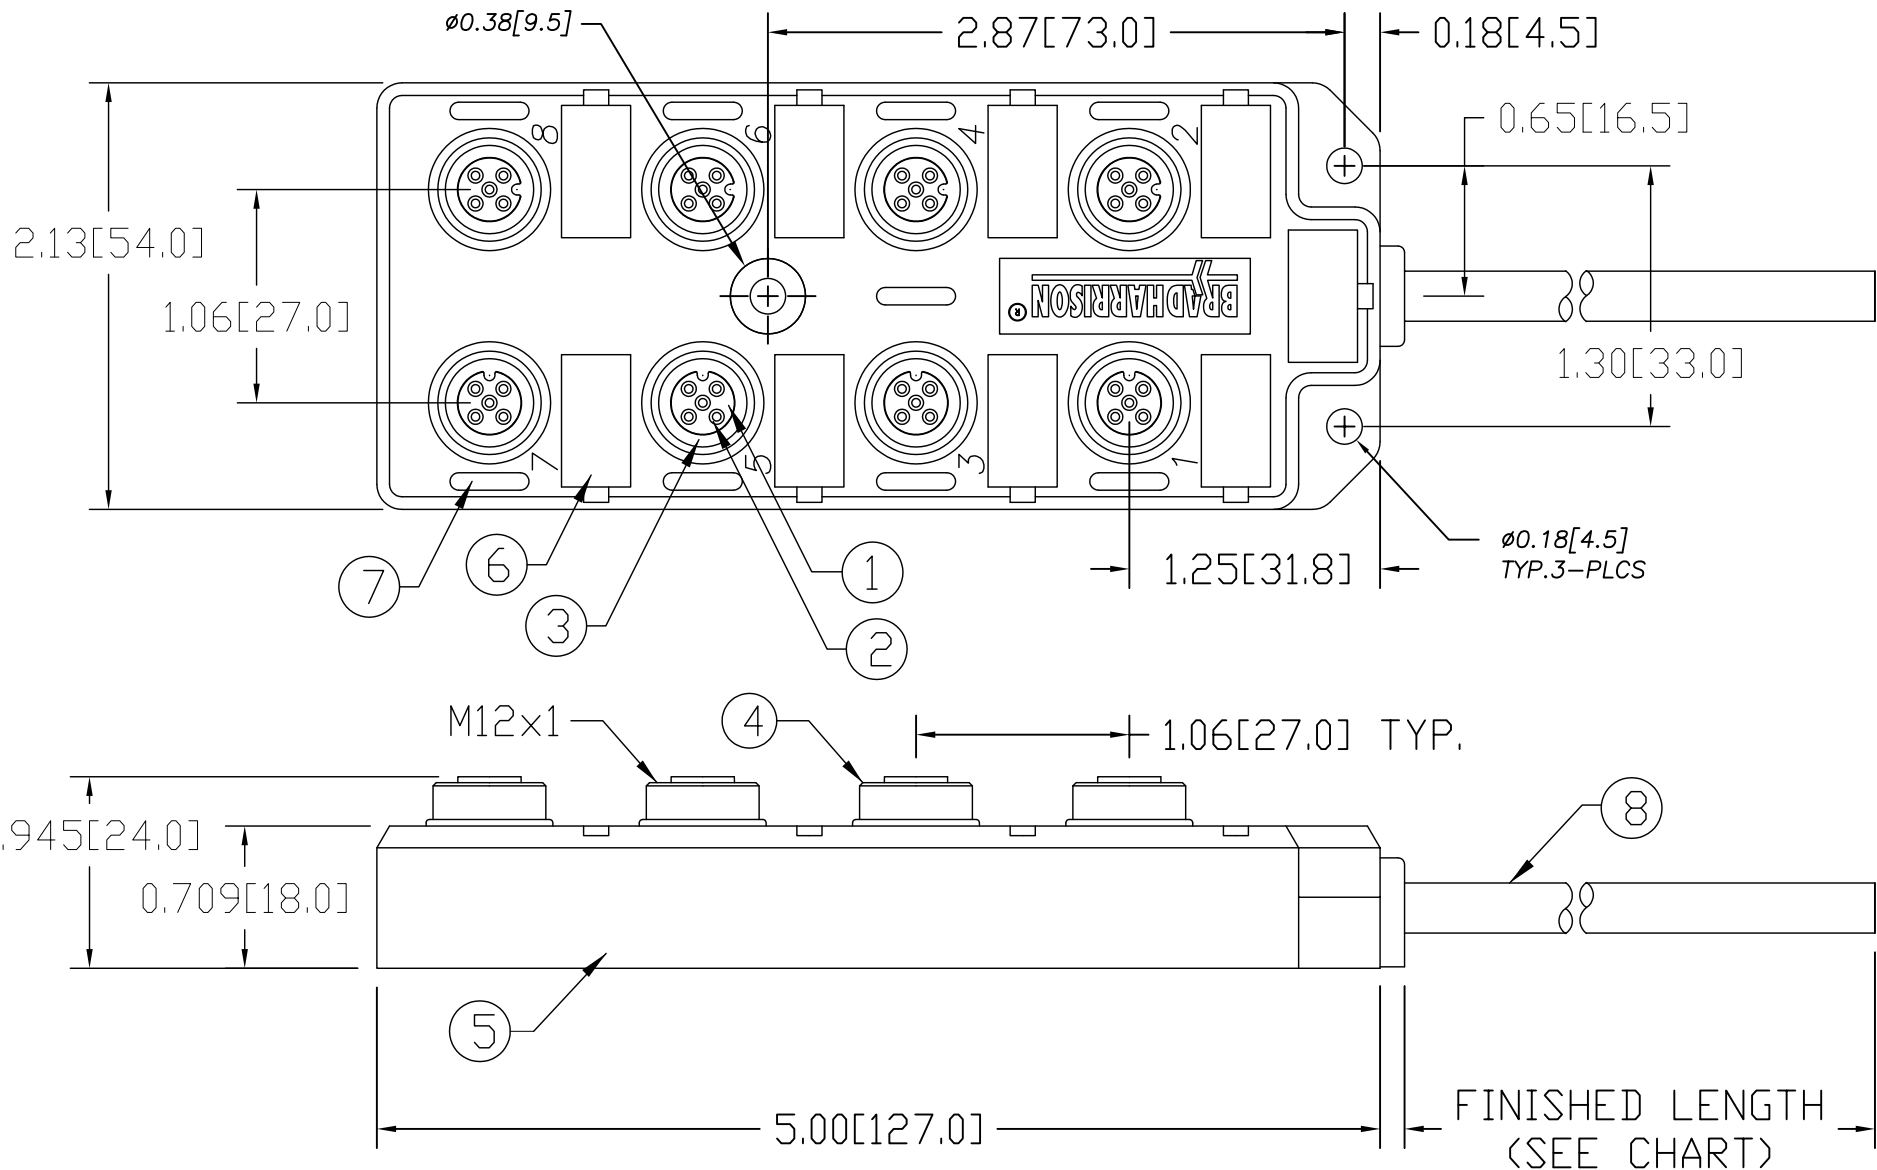


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH	MATERIAL CABLE	CABLE COLOR
1201140067	BTY801P-FBE-02	6.56' +3.50" -0 [2.0M +88.9 -0]	PVC	YELLOW
1201140068	BTY801P-FBE-05	16.40' +6.50" -0 [5.0M +165.1 -0]	PVC	YELLOW
1201140069	BTY801P-FBE-10	32.81' +12.50" -0 [10.0M +317.5 -0]	PVC	YELLOW
1201140070	BTY801P-FBE-15	49.21' +24.50" -0 [15.0M +622.3 -0]	PVC	YELLOW
1201140071	BTY801P-FBE-20	65.62' +24.50" -0 [20.0M +622.3 -0]	PVC	YELLOW
1201140072	BTY801P-FBP-05	16.40' +6.50" -0 [5.0M +165.1 -0]	PUR	BLACK
1201140073	BTY801P-FBP-10	32.81' +12.50" -0 [10.0M +317.5 -0]	PUR	BLACK
1201140074	BTY801P-FBP-15	49.21' +24.50" -0 [15.0M +622.3 -0]	PUR	BLACK
1201140075	BTY801P-FBP-20	65.62' +24.50" -0 [20.0M +622.3 -0]	PUR	BLACK
1201140076	BTY801P-FBP-25	82.02' +24.50" -0 [25.0M +622.3 -0]	PUR	BLACK
1201140077	BTY801P-FBP-30	98.43' +24.50" -0 [30.0M +622.3 -0]	PUR	BLACK
1201140078	BTY801P-FBP-50	164.04' +24.50" -0 [50.0M +622.3 -0]	PUR	BLACK

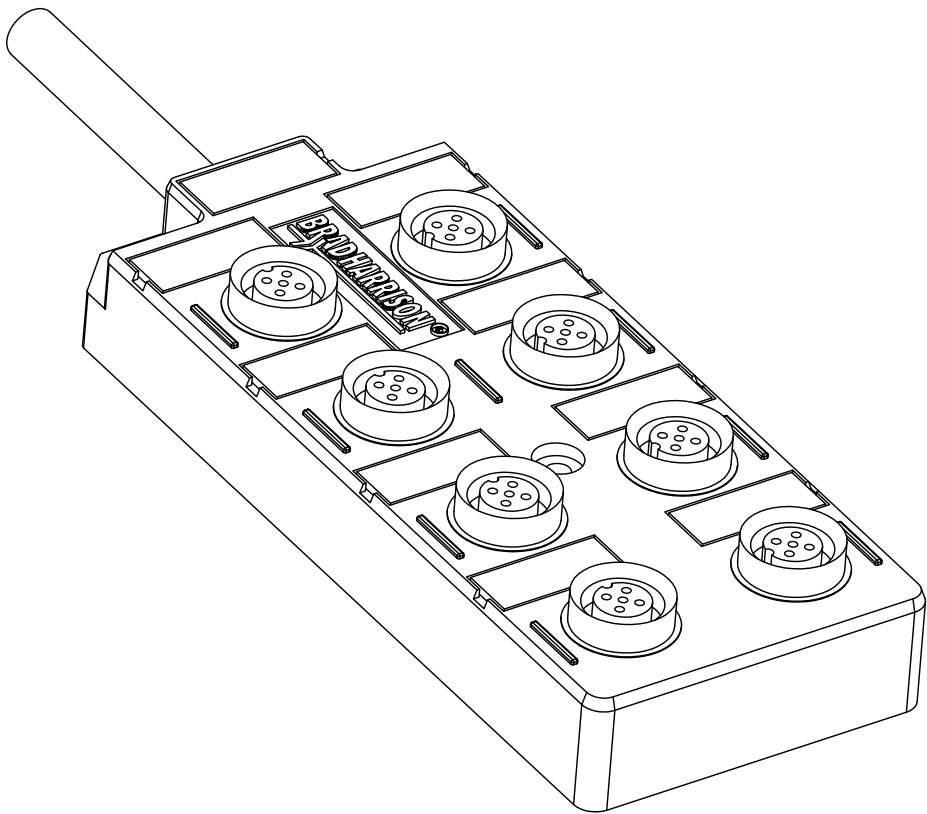

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON	RED
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	NYLON	CLEAR
8	CABLE, 18AWG, 3 CONDUCTOR, 22AWG, 8 CONDUCTOR, 300V	SEE TABLE	SEE TABLE

ADD 2 PINS TO TABLE

EC NO: WEU2010-0441

DRWN: BBRAUCH

CH'KD: BWOODMAN

APPR: FPACHER

2010/03/19

REV

DESCRIPTION

16.03.10

QUALITY SYMBOL

$\nabla=0$

$\nabla C=0$

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	$\pm---$	$\pm---$
3 PLACES	$\pm---$	$\pm---$
2 PLACES	$\pm---$	$\pm.01$
1 PLACE	± 0.3	$\pm---$
ANGULAR $\pm---$ °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE

IN/MM

DRAWN BY	DATE
LHARTMAN	2009/08/24
CHECKED BY	DATE
BWOODMAN	2009/08/26
APPROVED BY	DATE
FPACHER	2010/03/18
MATERIAL NO.	
SIZE	

SCALE

NTS

TITLE

MOLEX

MICRO-CHANGE MPIS

8 PORT TOP MOUNT PNP

#18/3 + #22/8 CABLE

MOLEX INCORPORATED

SD-120114-006

1 OF 1

DESIGN UNITS

METRIC

THIRD ANGLE PROJECTION

VOLTAGE RATING

10-30 VDC

AMPERAGE RATING PER PORT

4 AMPS

PROTECTION

IP67

OPERATING TEMPERATURE

-20°C TO 90°C

UL CERTIFICATIONS

UL RECOGNIZED, FILE NO. E46237

CSA CERTIFICATIONS

CSA CERTIFIED, FILE NO. LR6837

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com