

## 200-MHz CMOS OPERATIONAL AMPLIFIER

### FEATURES

- Qualified For Automotive Applications
- Unity-Gain Bandwidth: 450 MHz
- Wide Bandwidth: 200 MHz GBW
- High Slew Rate: 360 V/s
- Low Noise: 5.8 nV/ $\sqrt{\text{Hz}}$
- Excellent Video Performance
  - Differential Gain: 0.02%
  - Differential Phase: 0.05°
  - 0.1-dB Gain Flatness: 75 MHz
- Input Range Includes Ground
- Rail-To-Rail Output (Within 100 mV)
- Low Input Bias Current: 3 pA
- Thermal Shutdown
- Single-Supply Operating Range: 2.5 V To 5.5 V

### APPLICATIONS



- Video Processing
- Ultrasound
- Optical Networking, Tunable Lasers
- Photodiode Transimpedance Amplifiers
- Active Filters
- High-Speed Integrators
- Analog-To-Digital (A/D) Converter Input Buffers
- Digital-To-Analog (D/A) Converter Output Amplifiers
- Barcode Scanners
- Communications

### DESCRIPTION

The OPA356 is a high-speed voltage-feedback CMOS operational amplifier designed for video and other applications requiring wide bandwidth. The OPA356 is unity gain stable and can drive large output currents. Differential gain is 0.02% and differential phase is 0.05°. Quiescent current is only 8.3 mA.

OPA356 is optimized for operation on single or dual supplies as low as 2.5 V ( $\pm 1.25$  V) and up to 5.5 V ( $\pm 2.75$  V). Common-mode input range for the OPA356 extends 100 mV below ground and up to 1.5 V from V+. The output swing is within 100 mV of the rails, supporting wide dynamic range.

The OPA356 is available in the SOT23-5 package and is specified over the  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  range.

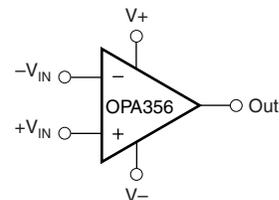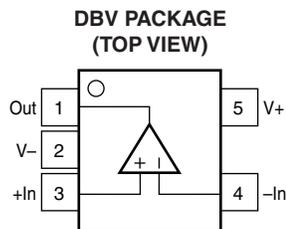

### ORDERING INFORMATION<sup>(1)</sup>

T <sub>A</sub>	PACKAGE <sup>(2)</sup>		ORDERABLE PART NUMBER	TOP-SIDE MARKING
$-40^{\circ}\text{C}$ to $125^{\circ}\text{C}$	SOT-23 – DBV	Reel of 3000	OPA356AQDBVRQ1	OOVQ

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

(2) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

$V_S$	Supply voltage, $V+$ to $V-$	7.5 V
$V_{IN}$	Signal input terminals voltage range <sup>(2)</sup>	-0.5 V to ( $V+ + 0.5$ V)
	$V-$ current <sup>(2)</sup>	10 mA
	Output short-circuit duration <sup>(3)</sup>	Continuous
$\theta_{JA}$	Thermal impedance, junction to free air <sup>(4)</sup>	150°C/W
$T_A$	Operating free-air temperature range	-40°C to 125°C
$T_{STG}$	Storage temperature range	-65°C to 150°C
$T_J$	Junction temperature	160°C
$T_{LEAD}$	Lead temperature (soldering, 10 s)	300°C

- (1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.
- (2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5 V beyond the supply rails should be current limited to 10 mA or less.
- (3) Short-circuit to ground one amplifier per package.
- (4) The package thermal impedance is calculated in accordance with JESD 51-5.

## RECOMMENDED OPERATING CONDITIONS

		MIN	MAX	UNIT
$V_S$	Supply voltage, $V-$ to $V+$	2.7	5.5	V
$T_A$	Operating free-air temperature	-40	125	°C

**ELECTRICAL CHARACTERISTICS**
 $V_S = 2.7\text{ V to }5.5\text{ V}$ ,  $R_F = 604\ \Omega$ ,  $R_L = 150\ \Omega$  connected to  $V_S/2$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A$ <sup>(1)</sup>	MIN	TYP	MAX	UNIT	
$V_{OS}$	Input offset voltage	$V_S = 5\text{ V}$ , $V_{CM} = V^- + 0.8\text{ V}$	25°C		±2	±9	mV	
			Full range			±15		
$\Delta V_{OS}/\Delta T$	Offset voltage drift over temperature		Full range		±7		µV/°C	
PSRR	Offset voltage drift vs power supply	$V_S = 2.7\text{ V to }5.5\text{ V}$ , $V_{CM} = V_S/2 - 0.15\text{ V}$	25°C		±80	±350	µV/V	
$I_B$	Input bias current		25°C		3	±50	pA	
$I_{OS}$	Input offset current		25°C		±1	±50	pA	
$V_n$	Input voltage noise density	$f = 1\text{ MHz}$	25°C		5.8		nV/√Hz	
$I_n$	Input current noise density	$f = 1\text{ MHz}$	25°C		50		fA/√Hz	
$V_{CM}$	Input common-mode voltage range		25°C	$V^- - 0.1$		$V^+ - 1.5$	V	
CMRR	Input common-mode rejection ratio	$V_S = 5.5\text{ V}$ , $-0.1\text{ V} < V_{CM} < 4\text{ V}$	25°C	66	80		dB	
			Full range	66				
$Z_{ID}$	Differential input impedance		25°C	$10^{13} \parallel 1.5$			Ω    pF	
$Z_{ICM}$	Common-mode input impedance		25°C	$10^{13} \parallel 1.5$			Ω    pF	
$A_{OL}$	Open-loop gain	$V_S = 5\text{ V}$ , $0.3\text{ V} < V_O < 4.7\text{ V}$	25°C	84	92		dB	
			Full range	80				
$f_{-3dB}$	Small-signal bandwidth	$G = +1$ , $V_O = 100\text{ mVp-p}$ , $R_F = 0\ \Omega$	25°C	450		MHz		
				$G = +2$ , $V_O = 100\text{ mVp-p}$ , $R_L = 50\ \Omega$	100			
					$G = +2$ , $V_O = 100\text{ mVp-p}$ , $R_L = 150\ \Omega$		170	
							$G = +2$ , $V_O = 100\text{ mVp-p}$ , $R_L = 1\text{ k}\Omega$	200
GBW	Gain-bandwidth product	$G = +10$ , $R_L = 1\text{ k}\Omega$	25°C	200		MHz		
$f_{0.1dB}$	Bandwidth for 0.1-dB gain flatness	$G = +2$ , $V_O = 100\text{ mVp-p}$ , $R_F = 560\ \Omega$	25°C	75		MHz		
SR	Slew rate	$V_S = 5\text{ V}$ , $G = +2$ , 4-V output step	25°C	+300 -360		V/µs		
$t_{rf}$	Rise-and-fall time	$G = +2$ , $V_O = 200\text{ mVp-p}$ , 10% to 90%	25°C	2.4		ns		
				$G = +2$ , $V_O = 2\text{ Vp-p}$ , 10% to 90%	8			
$t_{settle}$	Settling time	$V_S = 5\text{ V}$ , $G = +2$ , 2-V output step	25°C	30		ns		
			25°C	120				
Overload recovery time		$V_{IN} \times \text{Gain} = V_S$	25°C	8		ns		
Harmonic distortion	Second harmonic	$G = +2$ , $f = 1\text{ MHz}$ , $V_O = 2\text{ Vp-p}$ , $R_L = 200\ \Omega$	25°C	-81		dBc		
	Third harmonic		25°C	-93				
Differential gain error		NTSC, $R_L = 150\ \Omega$	25°C	0.02		%		
Differential phase error		NTSC, $R_L = 150\ \Omega$	25°C	0.05		°		
Voltage output swing from rail		$V_S = 5\text{ V}$ , $R_L = 150\ \Omega$ , $A_{OL} > 84\text{ dB}$	25°C	0.2	0.3	V		
		$V_S = 5\text{ V}$ , $R_L = 1\text{ k}\Omega$		0.1				
		$V_S = 5\text{ V}$ , $R_L = 50\ \Omega$		0.4	0.6			
$I_O$	Output current <sup>(2)</sup>	Continuous	25°C	±60		mA		
		Peak		$V_S = 5\text{ V}$	±100			
				$V_S = 3\text{ V}$	±80			

 (1) Full range  $T_A = -40^\circ\text{C}$  to  $125^\circ\text{C}$ 

 (2) See typical characteristic graph *Output Voltage Swing vs Output Current*.







**ELECTRICAL CHARACTERISTICS (continued)**

$V_S = 2.7\text{ V}$  to  $5.5\text{ V}$ ,  $R_F = 604\ \Omega$ ,  $R_L = 150\ \Omega$  connected to  $V_S/2$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS	$T_A^{(1)}$	MIN	TYP	MAX	UNIT
Short-circuit current		25°C		+250 -200		mA
Closed-loop output impedance		25°C		0.02		$\Omega$
$I_Q$ Quiescent current	$V_S = 5\text{ V}$ , $I_O = 0$	25°C		8.3	11	mA
		Full range			14	
Thermal shutdown junction temperature	Shutdown	25°C		160		°C
	Reset from shutdown			140		







**TYPICAL CHARACTERISTICS**

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +2$ ,  $R_F = 604\ \Omega$ ,  $R_L = 150\ \Omega$  connected to  $V_S/2$  (unless otherwise noted)

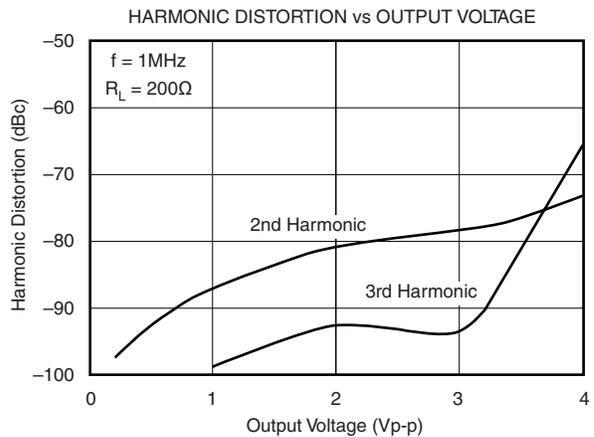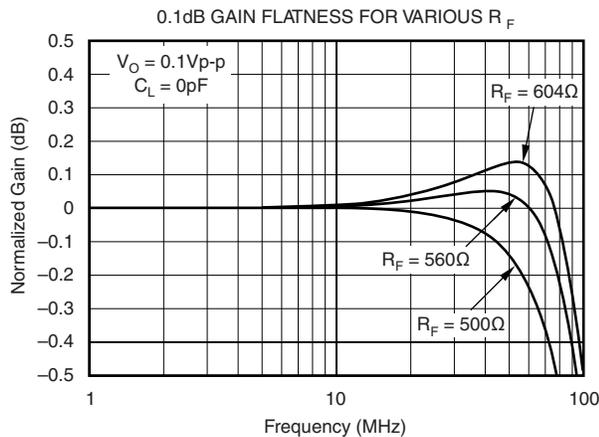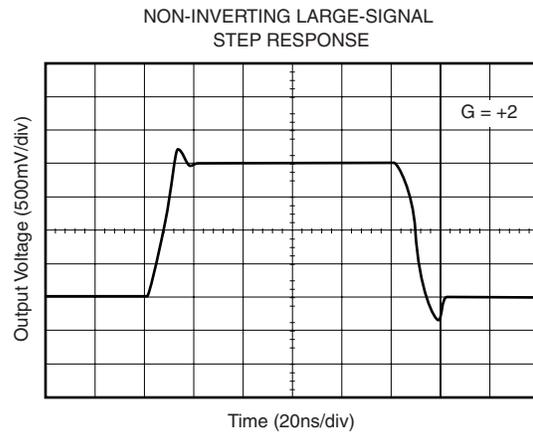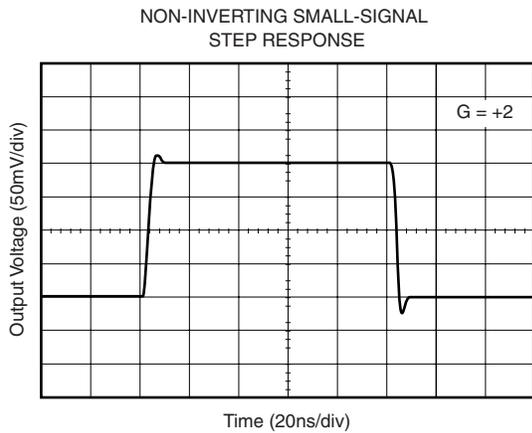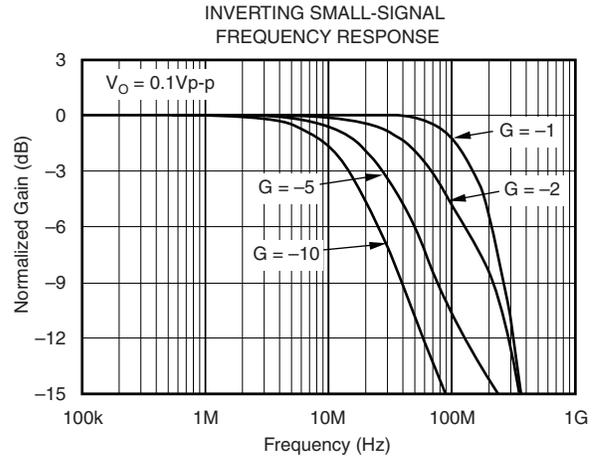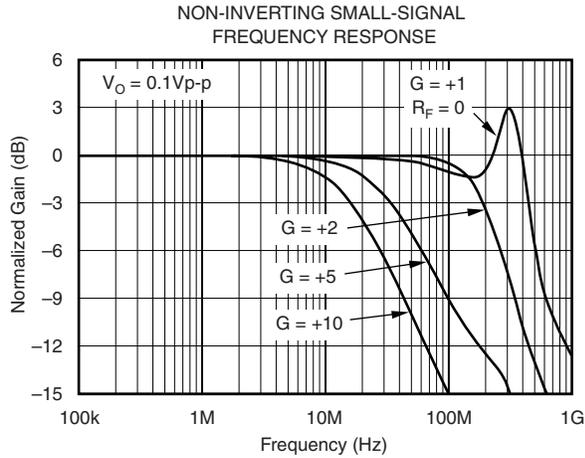







**TYPICAL CHARACTERISTICS (continued)**

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +2$ ,  $R_F = 604\ \Omega$ ,  $R_L = 150\ \Omega$  connected to  $V_S/2$  (unless otherwise noted)

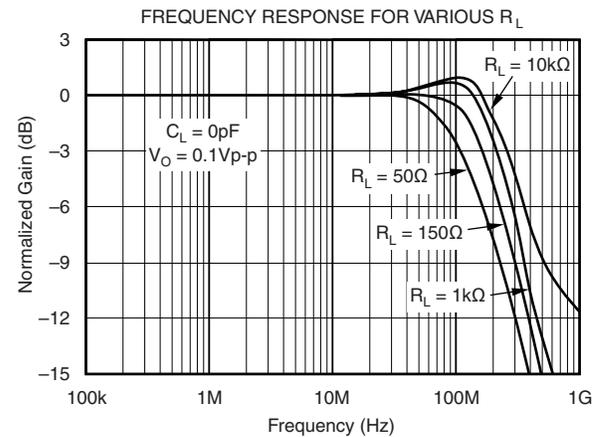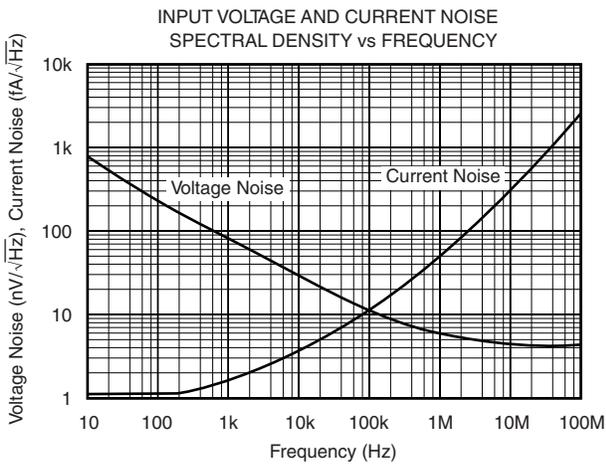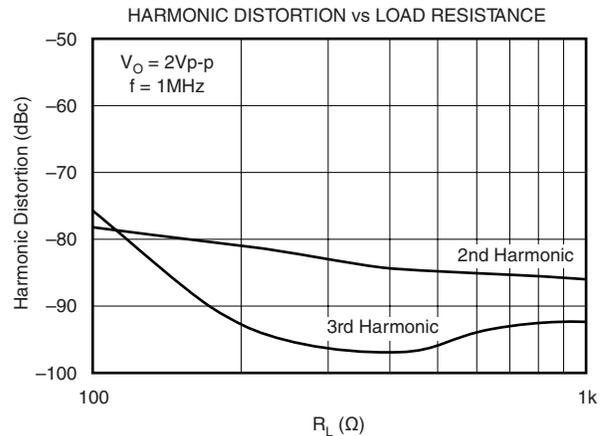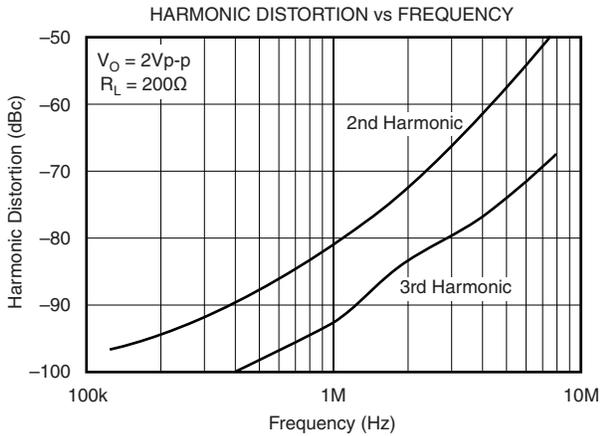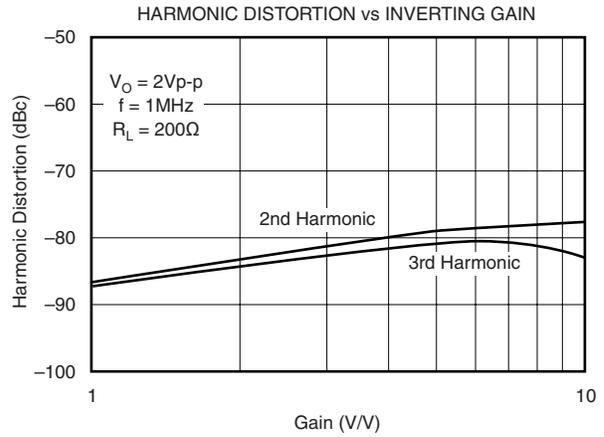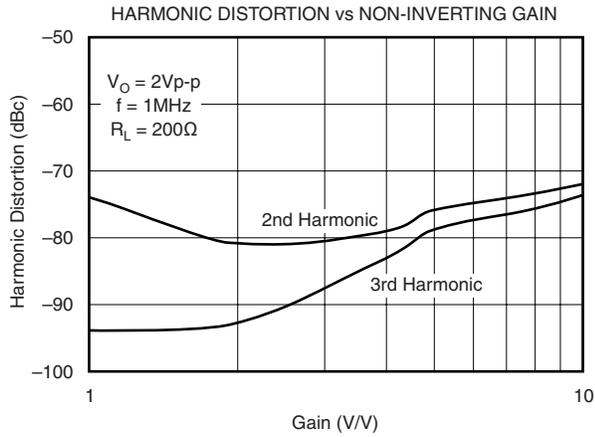







TYPICAL CHARACTERISTICS (continued)

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +2$ ,  $R_F = 604\ \Omega$ ,  $R_L = 150\ \Omega$  connected to  $V_S/2$  (unless otherwise noted)

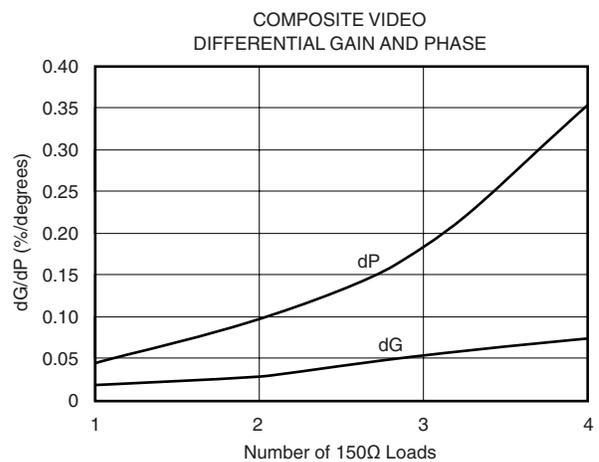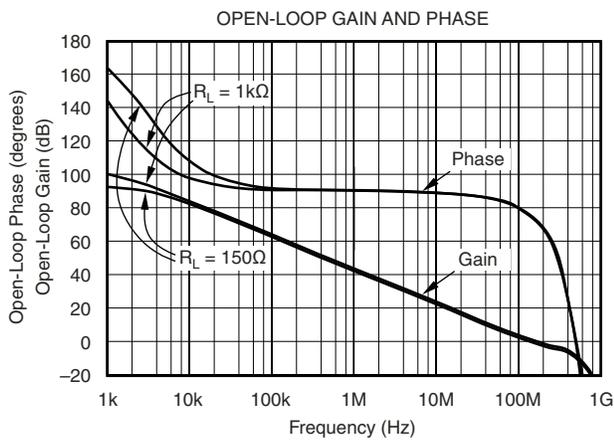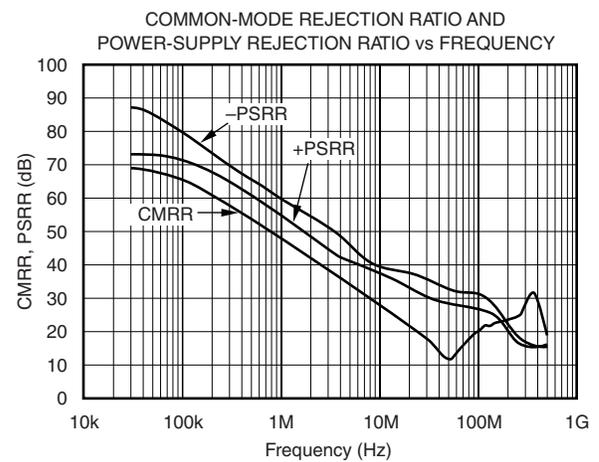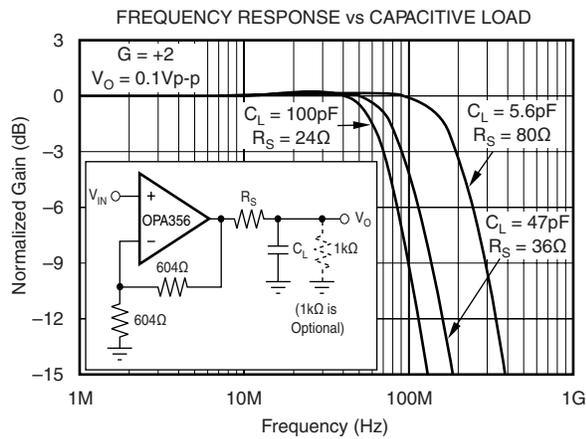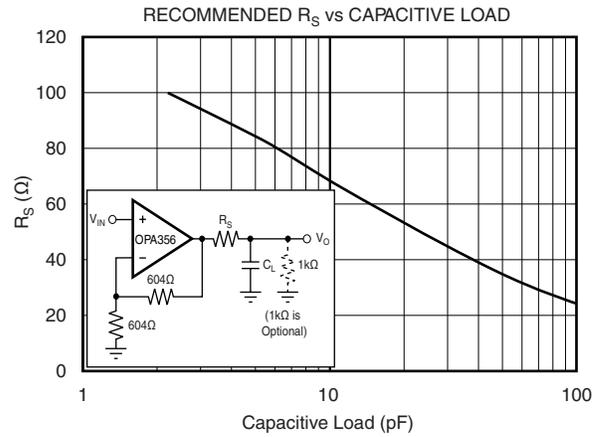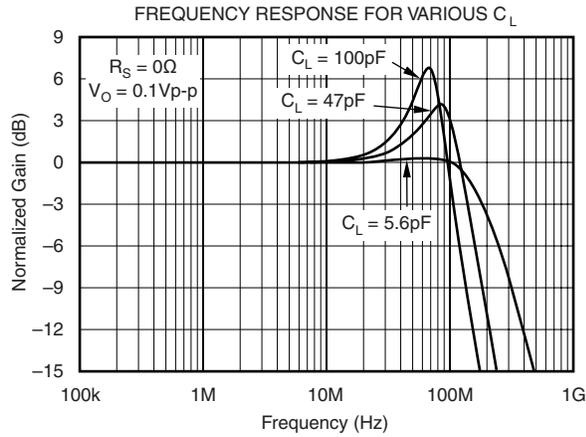





**TYPICAL CHARACTERISTICS (continued)**

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +2$ ,  $R_F = 604\ \Omega$ ,  $R_L = 150\ \Omega$  connected to  $V_S/2$  (unless otherwise noted)

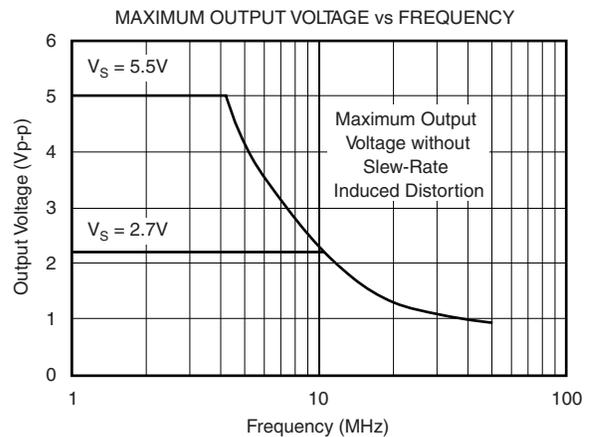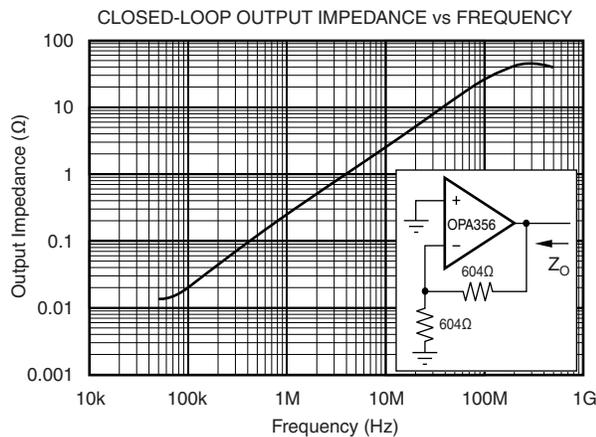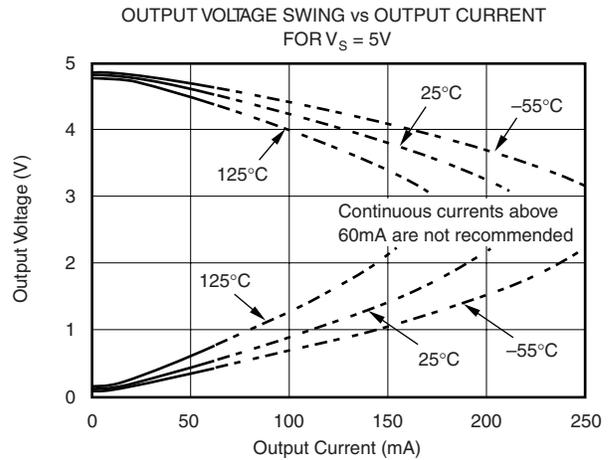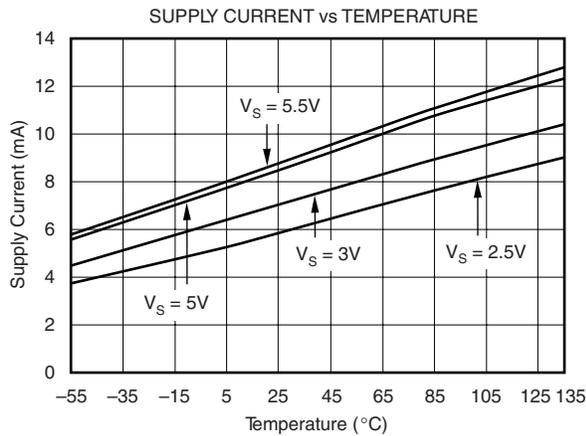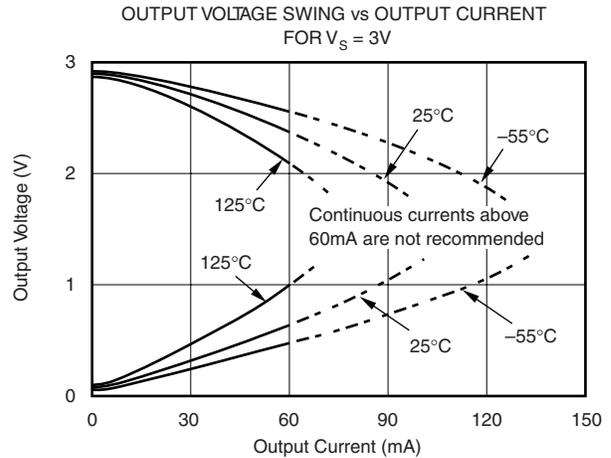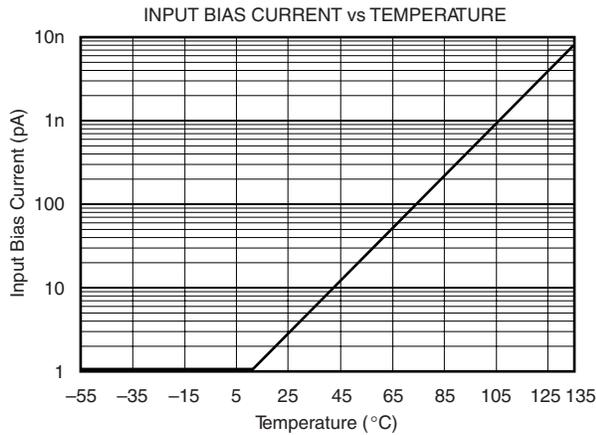

**TYPICAL CHARACTERISTICS (continued)**

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +2$ ,  $R_F = 604\ \Omega$ ,  $R_L = 150\ \Omega$  connected to  $V_S/2$  (unless otherwise noted)

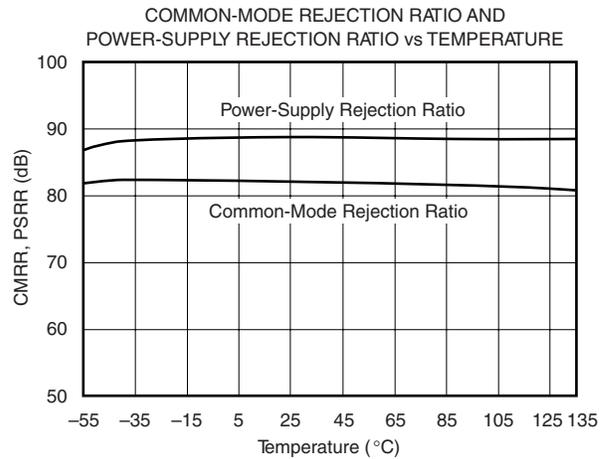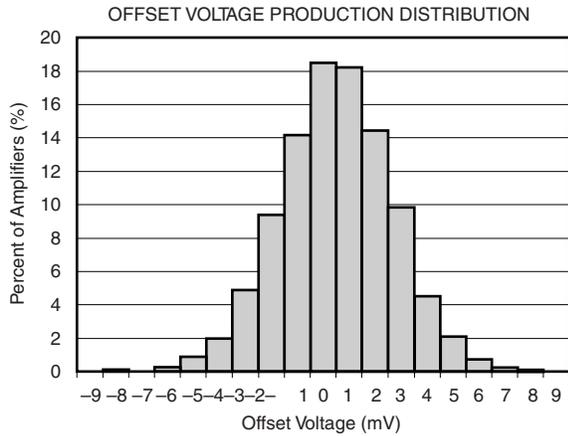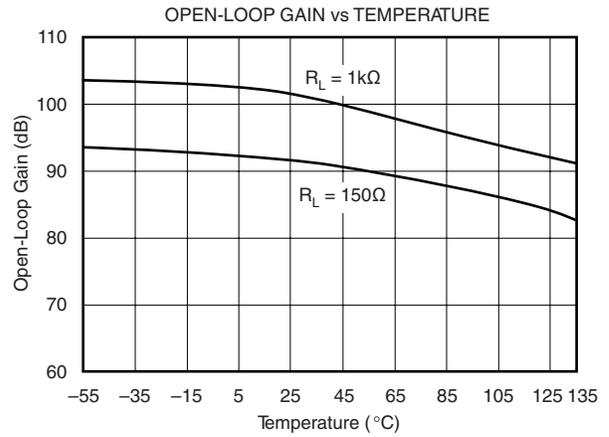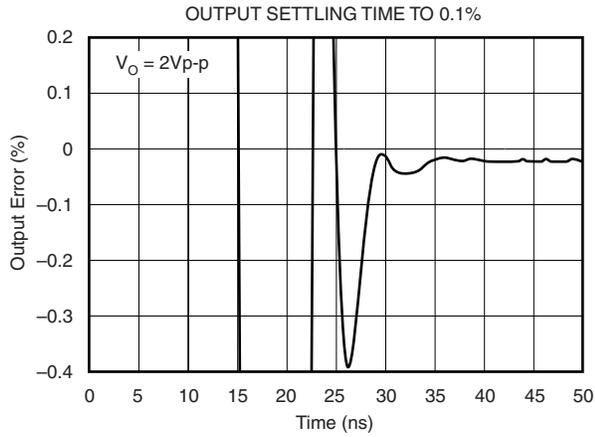

## APPLICATION INFORMATION

The OPA356 is a CMOS high-speed voltage-feedback operational amplifier designed for video and other general-purpose applications.

The amplifier features a 200-MHz gain bandwidth and 360-V/ $\mu$ s slew rate, but it is unity-gain stable and can be operated as a 1-V/V voltage follower.

Its input common-mode voltage range includes ground, allowing the OPA356 to be used in virtually any single-supply application up to a supply voltage of 5.5 V.

### PCB Layout

Good high-frequency PC board layout techniques should be employed for the OPA356. Generous use of ground planes, short direct signal traces, and a suitable bypass capacitor located at the V+ pin assure clean, stable operation. Large areas of copper also provide a means of dissipating heat that is generated within the amplifier in normal operation.

Sockets are definitely not recommended for use with any high-speed amplifier.

A 10- $\mu$ F ceramic bypass capacitor is the minimum recommended value; adding a 1- $\mu$ F or larger tantalum capacitor in parallel can be beneficial when driving a low-resistance load. Providing adequate bypass capacitance is essential to achieving very low harmonic and intermodulation distortion.

### Operating Voltage

The OPA356 is specified over a power-supply range of 2.7 V to 5.5 V ( $\pm 1.35$  V to  $\pm 2.75$  V). However, the supply voltage may range from 2.5 V to 5.5 V ( $\pm 1.25$  V to  $\pm 2.75$  V). Supply voltages higher than 7.5 V (absolute maximum) can permanently damage the amplifier.

Parameters that vary significantly over supply voltage or temperature are shown in the *Typical Characteristics* section of this data sheet.

### Output Drive

The OPA356 output stage is capable of driving a standard back-terminated 75- $\Omega$  video cable. By back-terminating a transmission line, it does not exhibit a capacitive load to its driver. A properly back-terminated 75- $\Omega$  cable does not appear as capacitance; it presents only a 150- $\Omega$  resistive load to the OPA356 output.


The output stage can supply high short-circuit current (typically over 200 mA). Therefore, an on-chip thermal shutdown circuit is provided to protect the OPA356 from dangerously high junction temperatures. At 160°C, the protection circuit will shut down the amplifier. Normal operation will resume when the junction temperature cools to below 140°C.

#### NOTE:

It is not recommended to run a continuous dc current in excess of  $\pm 60$  mA. See the "Output Voltage Swing vs Output Current" graph in the *Typical Characteristics* section of this data sheet.

## Input and ESD Protection

All OPA356 pins are static protected with internal ESD protection diodes tied to the supplies, as shown in [Figure 1](#). These diodes provide overdrive protection if the current is externally limited to 10 mA by the source or by a resistor.

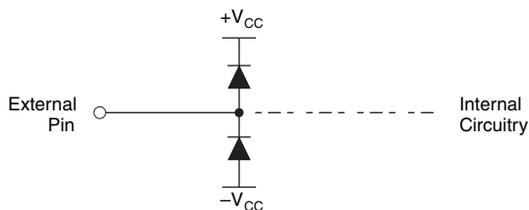

**Figure 1. Internal ESD Protection**

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
OPA356AQDBVRQ1	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OOVQ	Samples

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF OPA356-Q1 :**

- Catalog: [OPA356](#)


## NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

## TAPE AND REEL INFORMATION

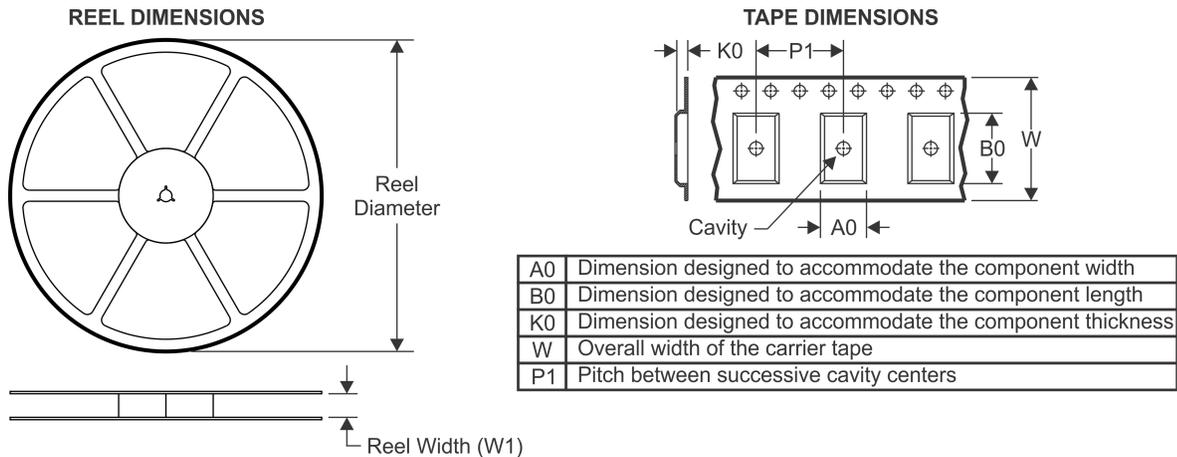


### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

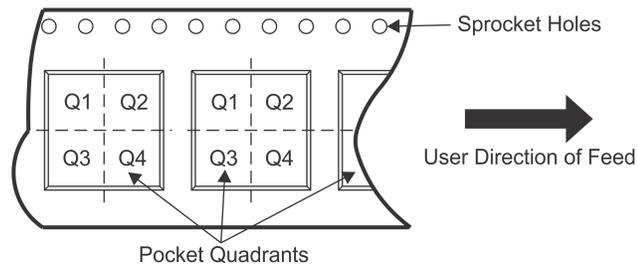

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA356AQDBVRQ1	SOT-23	DBV	5	3000	178.0	9.0	3.3	3.2	1.4	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS

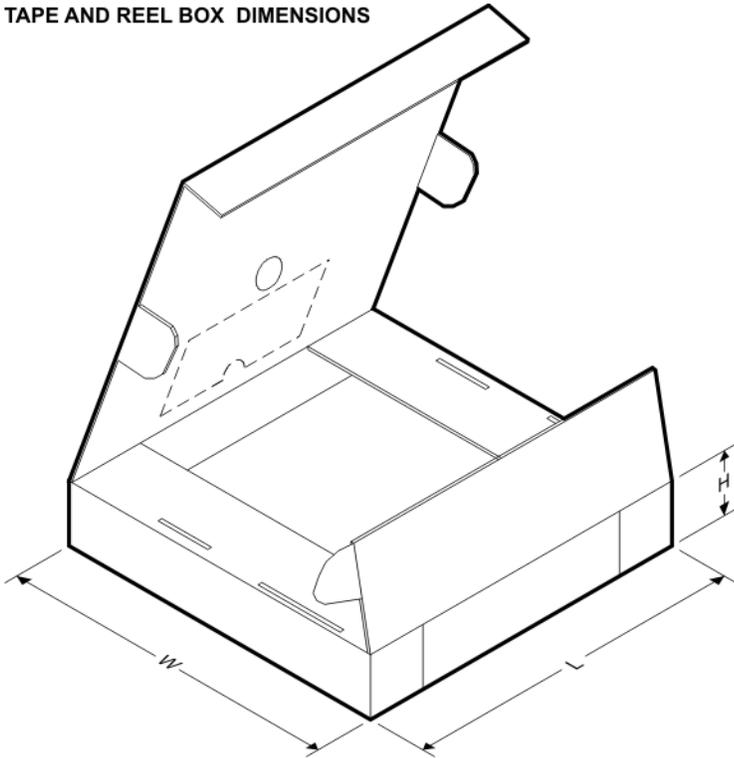


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA356AQDBVRQ1	SOT-23	DBV	5	3000	190.0	190.0	30.0

DBV (R-PDSO-G5)


PLASTIC SMALL-OUTLINE PACKAGE

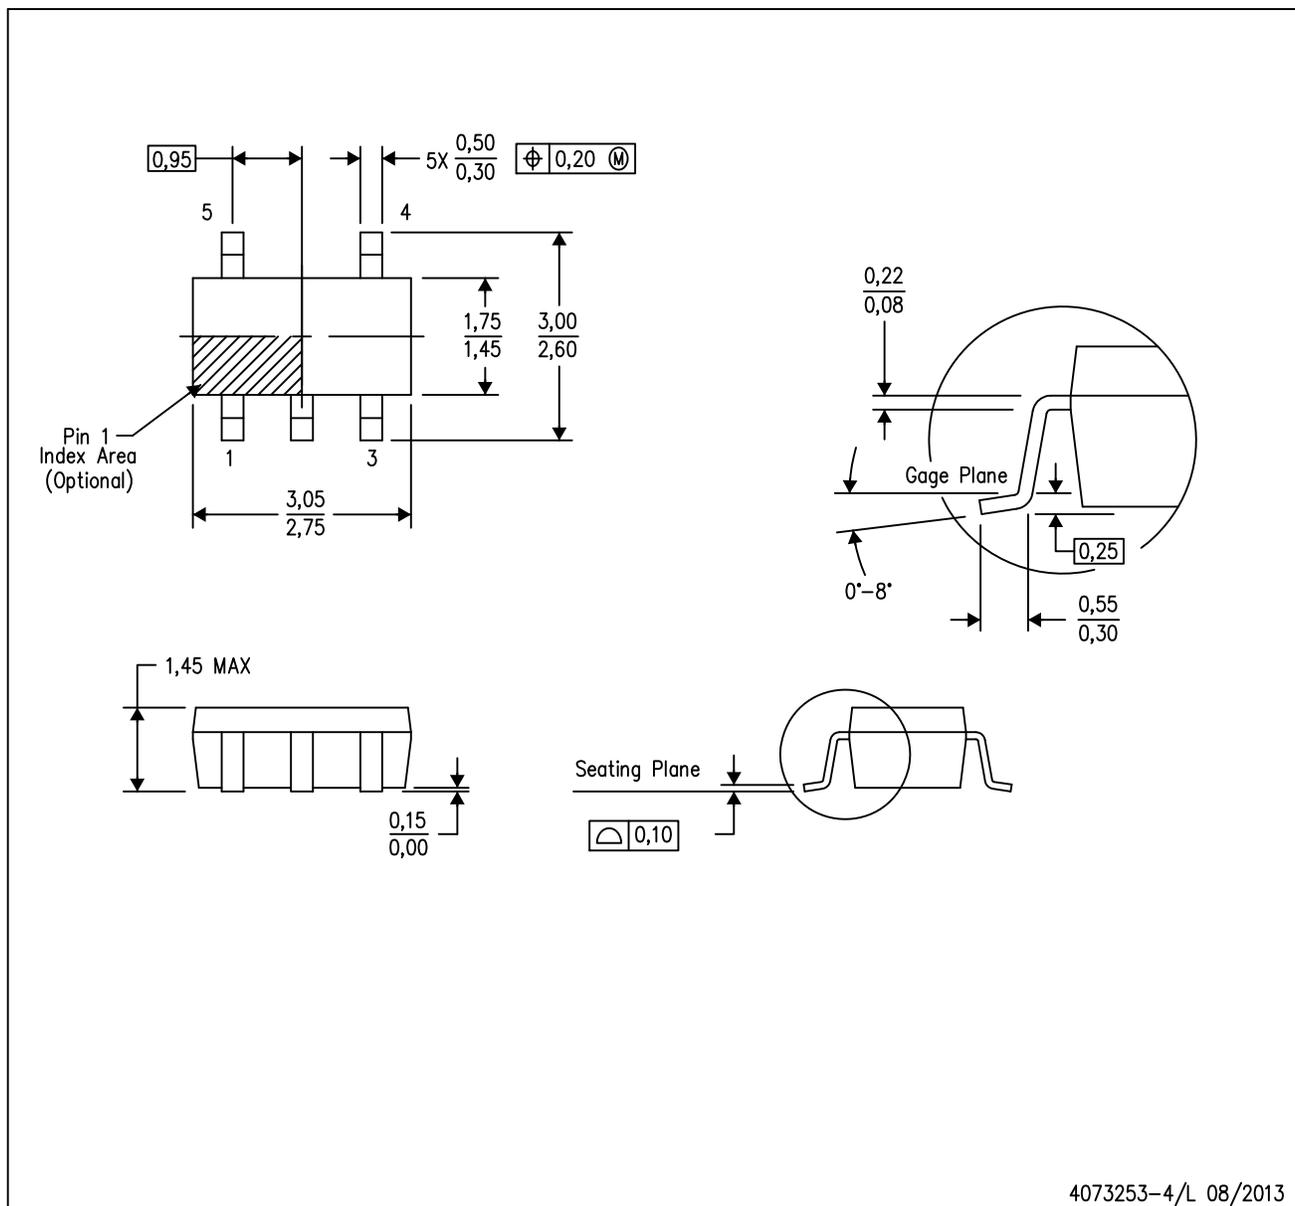

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - D. Falls within JEDEC MO-178 Variation AA.

DBV (R-PDSO-G5)

PLASTIC SMALL OUTLINE

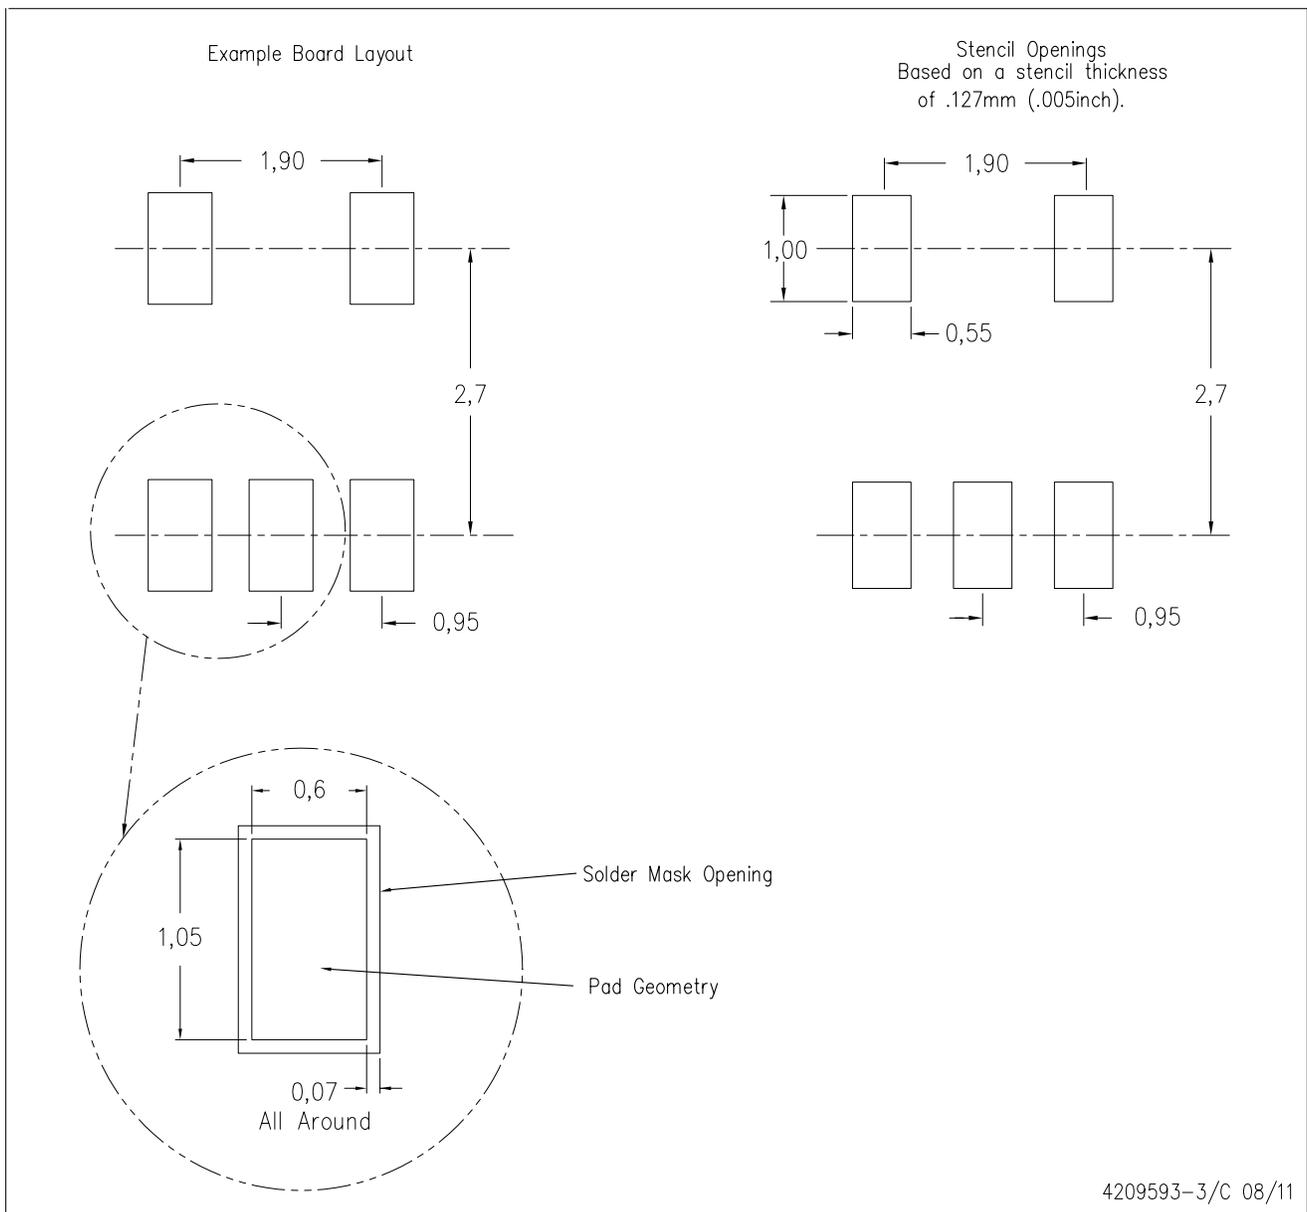

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
  - D. Publication IPC-7351 is recommended for alternate designs.
  - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)