


# BC856- BC860

## PNP Epitaxial Silicon Transistor

### Features

- Switching and Amplifier Applications
- Suitable for automatic insertion in thick and thin-film circuits
- Low Noise: BC859, BC860
- Complement to BC846 ... BC850



1. Base 2. Emitter 3. Collector

### Absolute Maximum Ratings\* $T_a = 25^\circ\text{C}$ unless otherwise noted

| Symbol    | Parameter                   | Value     | Units            |
|-----------|-----------------------------|-----------|------------------|
| $V_{CBO}$ | Collector-Base Voltage      |           |                  |
|           | : BC856                     | -80       | V                |
|           | : BC857/860                 | -50       | V                |
|           | : BC858/859                 | -30       | V                |
| $V_{CEO}$ | Collector-Emitter Voltage   |           |                  |
|           | : BC856                     | -65       | V                |
|           | : BC857/860                 | -45       | V                |
|           | : BC858/859                 | -30       | V                |
| $V_{EBO}$ | Emitter-Base Voltage        | -5        | V                |
| $I_C$     | Collector Current (DC)      | -100      | mA               |
| $P_C$     | Collector Power Dissipation | 310       | mW               |
| $T_J$     | Junction Temperature        | 150       | $^\circ\text{C}$ |
| $T_{STG}$ | Storage Temperature         | -65 ~ 150 | $^\circ\text{C}$ |

\* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

### Electrical Characteristics\* $T_a = 25^\circ\text{C}$ unless otherwise noted

| Symbol               | Parameter                            | Test Condition                                                                                      | Min. | Typ. | Max. | Units |
|----------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------|------|------|------|-------|
| $I_{CBO}$            | Collector Cut-off Current            | $V_{CB} = -30\text{V}, I_E = 0$                                                                     |      |      | -15  | nA    |
| $h_{FE}$             | DC Current Gain                      | $V_{CE} = -5\text{V}, I_C = -2\text{mA}$                                                            | 110  |      | 800  |       |
| $V_{CE}(\text{sat})$ | Collector-Emitter Saturation Voltage | $I_C = -10\text{mA}, I_B = -0.5\text{mA}$                                                           |      | -90  | -300 | mV    |
|                      |                                      | $I_C = -100\text{mA}, I_B = -5\text{mA}$                                                            |      | -250 | -650 | mV    |
| $V_{BE}(\text{sat})$ | Base-Emitter Saturation Voltage      | $I_C = -10\text{mA}, I_B = -0.5\text{mA}$                                                           |      | -700 |      | mV    |
|                      |                                      | $I_C = -100\text{mA}, I_B = -5\text{mA}$                                                            |      | -900 |      | mV    |
| $V_{BE}(\text{on})$  | Base-Emitter On Voltage              | $V_{CE} = -5\text{V}, I_C = -2\text{mA}$                                                            | -600 | -660 | -750 | mV    |
|                      |                                      | $V_{CE} = -5\text{V}, I_C = -10\text{mA}$                                                           |      |      | -800 | mV    |
| $f_T$                | Current Gain Bandwidth Product       | $V_{CE} = -5\text{V}, I_C = -10\text{mA}$<br>$f = 100\text{MHz}$                                    |      | 150  |      | MHz   |
| $C_{ob}$             | Output Capacitance                   | $V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$                                                    |      |      | 6    | pF    |
| NF                   | Noise Figure                         | $V_{CE} = -5\text{V}, I_C = -200\mu\text{A}$<br>$R_G = 2\text{K}\Omega, f = 1\text{KHz}$            |      | 2    | 10   | dB    |
|                      |                                      |                                                                                                     |      | 1    | 4    | dB    |
|                      | : BC859                              | $V_{CE} = -5\text{V}, I_C = -200\mu\text{A}$<br>$R_G = 2\text{K}\Omega, f = 30 \sim 15000\text{Hz}$ |      | 1.2  | 4    | dB    |
|                      |                                      |                                                                                                     |      | 1.2  | 2    | dB    |

\* Pulse Test: Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$

**h<sub>FE</sub> Classification**

| Classification  | A         | B         | C         |
|-----------------|-----------|-----------|-----------|
| h <sub>FE</sub> | 110 ~ 220 | 200 ~ 450 | 420 ~ 800 |

**Ordering Information**

| Device <sup>(note1)</sup> | Device Marking | Package | Packing Method | Qty(pcs) | Pin Difinitions              |
|---------------------------|----------------|---------|----------------|----------|------------------------------|
| BC856AMTF                 | 9AA            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC856BMTF                 | 9AB            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC856CMTF                 | 9AC            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC857AMTF                 | 9BA            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC857BMTF                 | 9BB            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC857CMTF                 | 9BC            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC858AMTF                 | 9CA            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC858BMTF                 | 9CB            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC858CMTF                 | 9CC            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC859AMTF                 | 9DA            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC859BMTF                 | 9DB            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC859CMTF                 | 9DC            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC860AMTF                 | 9EA            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC860BMTF                 | 9EB            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |
| BC860CMTF                 | 9EC            | SOT-23  | Tape & Reel    | 3000     | 1.Base 2.Emitter 3.Collector |

Note1 : Affix "-A,-B,-C" means h<sub>FE</sub> classification.

Affix "-M" means the matte type package.

Affix "-TF" means the tape & reel type packing.

## Typical Performance Characteristics

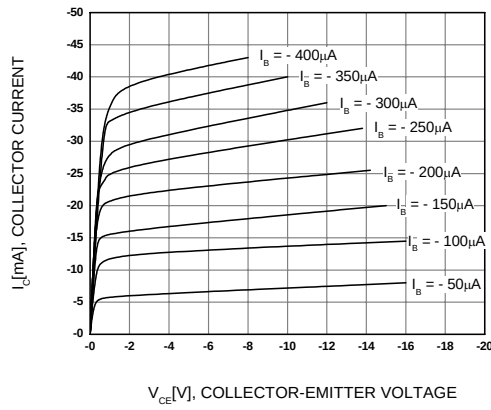


Figure 1. Static Characteristic

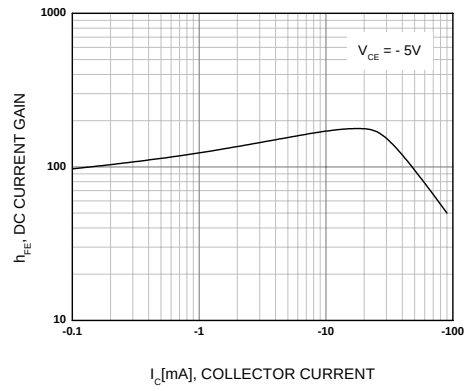


Figure 2. DC current Gain

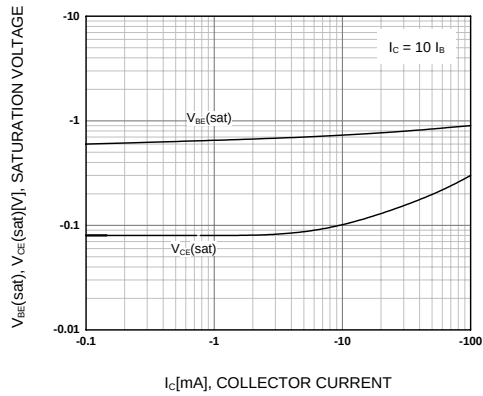


Figure 3. Base-Emitter Saturation Voltage  
Collector-Emitter Saturation Voltage

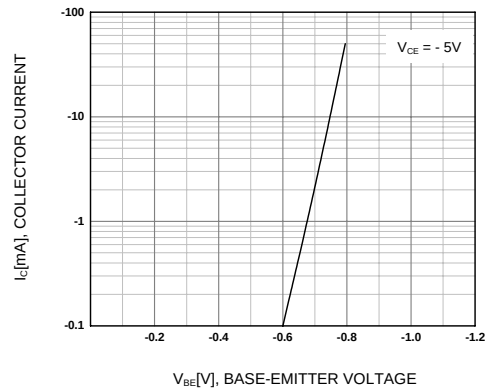


Figure 4. Base-Emitter On Voltage

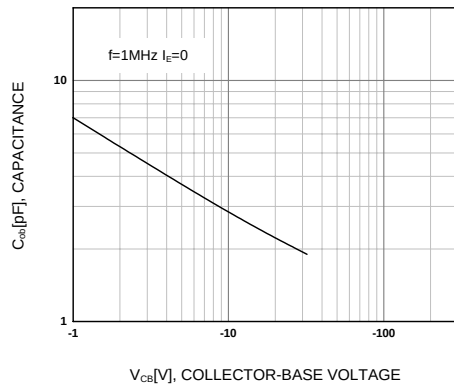


Figure 5. Collector Output Capacitance


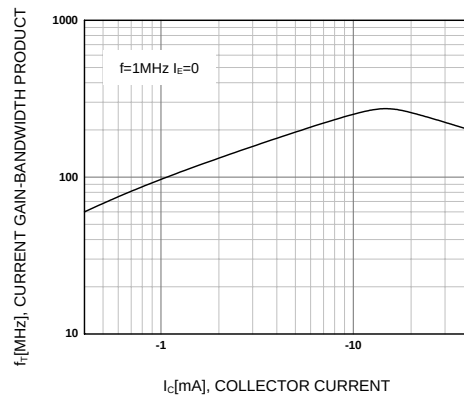


Figure 6. Current Gain Bandwidth Product

# Mechanical Dimensions

## SOT-23

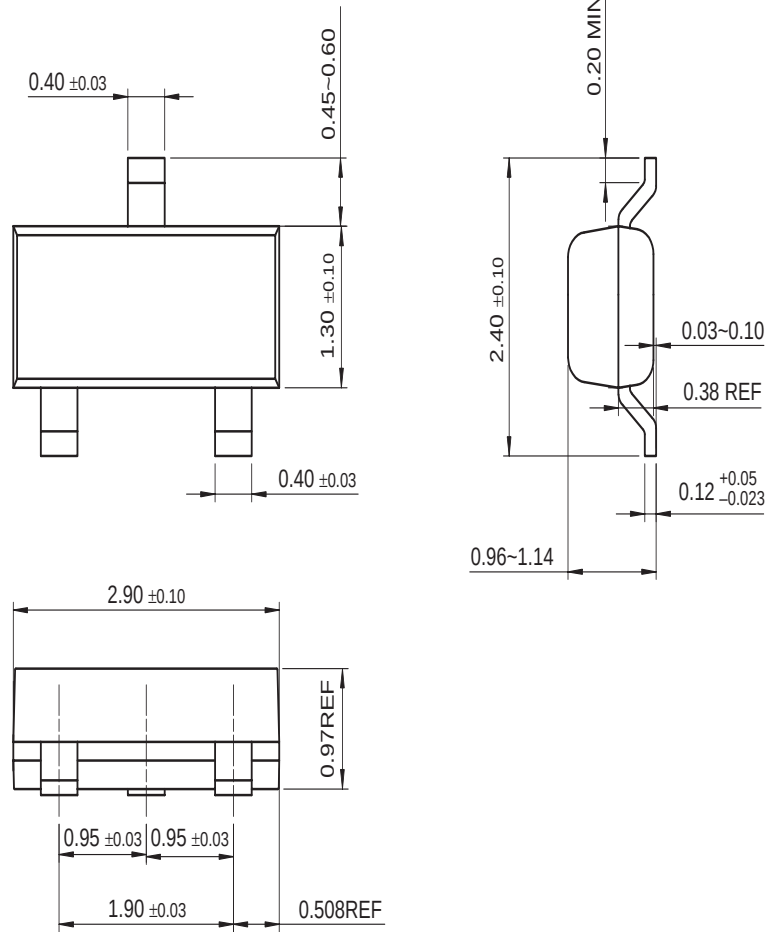

Dimensions in Millimeters

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                                  |                                 |                                 |                              |                       |
|--------------------------------------------------|---------------------------------|---------------------------------|------------------------------|-----------------------|
| ACE <sup>™</sup>                                 | FACT Quiet Series <sup>™</sup>  | OCX <sup>™</sup>                | SILENT SWITCHER <sup>®</sup> | UltraFET <sup>®</sup> |
| ActiveArray <sup>™</sup>                         | GlobalOptoisolator <sup>™</sup> | OCXPro <sup>™</sup>             | SMART START <sup>™</sup>     | UniFET <sup>™</sup>   |
| Bottomless <sup>™</sup>                          | GTO <sup>™</sup>                | OPTOLOGIC <sup>®</sup>          | SPM <sup>™</sup>             | VCX <sup>™</sup>      |
| Build it Now <sup>™</sup>                        | HiSeC <sup>™</sup>              | OPTOPLANAR <sup>™</sup>         | Stealth <sup>™</sup>         | Wire <sup>™</sup>     |
| CoolFET <sup>™</sup>                             | I <sup>2</sup> C <sup>™</sup>   | PACMAN <sup>™</sup>             | SuperFET <sup>™</sup>        |                       |
| CROSSVOLT <sup>™</sup>                           | i-Lo <sup>™</sup>               | POP <sup>™</sup>                | SuperSOT <sup>™</sup> -3     |                       |
| DOME <sup>™</sup>                                | ImpliedDisconnect <sup>™</sup>  | Power247 <sup>™</sup>           | SuperSOT <sup>™</sup> -6     |                       |
| EcoSPARK <sup>™</sup>                            | IntelliMAX <sup>™</sup>         | PowerEdge <sup>™</sup>          | SuperSOT <sup>™</sup> -8     |                       |
| E <sup>2</sup> CMOS <sup>™</sup>                 | ISOPLANAR <sup>™</sup>          | PowerSaver <sup>™</sup>         | SyncFET <sup>™</sup>         |                       |
| EnSigna <sup>™</sup>                             | LittleFET <sup>™</sup>          | PowerTrench <sup>®</sup>        | TCM <sup>™</sup>             |                       |
| FACT <sup>™</sup>                                | MICROCOUPLER <sup>™</sup>       | QFET <sup>®</sup>               | TinyBoost <sup>™</sup>       |                       |
| FAST <sup>®</sup>                                | MicroFET <sup>™</sup>           | QS <sup>™</sup>                 | TinyBuck <sup>™</sup>        |                       |
| FAST <sup>™</sup>                                | MicroPak <sup>™</sup>           | QT Optoelectronics <sup>™</sup> | TinyPWM <sup>™</sup>         |                       |
| FPS <sup>™</sup>                                 | MICROWIRE <sup>™</sup>          | Quiet Series <sup>™</sup>       | TinyPower <sup>™</sup>       |                       |
| FRFET <sup>™</sup>                               | MSX <sup>™</sup>                | RapidConfigure <sup>™</sup>     | TinyLogic <sup>®</sup>       |                       |
|                                                  | MSXPro <sup>™</sup>             | RapidConnect <sup>™</sup>       | TINYOPTO <sup>™</sup>        |                       |
| Across the board. Around the world. <sup>™</sup> |                                 | μSerDes <sup>™</sup>            | TruTranslation <sup>™</sup>  |                       |
| The Power Franchise <sup>®</sup>                 |                                 | ScalarPump <sup>™</sup>         | UHC <sup>™</sup>             |                       |
| Programmable Active Droop <sup>™</sup>           |                                 |                                 |                              |                       |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition                                                                                                                                                                                                            |
|--------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                                    |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.                                                       |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.                                                   |

Rev. I20

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)