
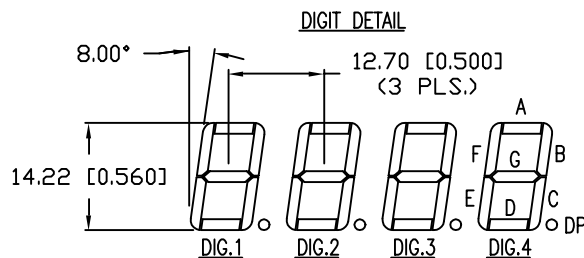
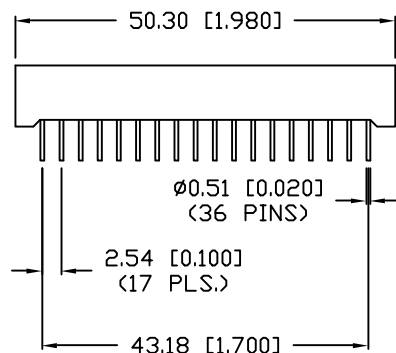


UNCONTROLLED DOCUMENT

|                                     |  |      |
|-------------------------------------|--|------|
| (X) PART NUMBER<br>LDQ-A516RI       |  | REV. |
| E.C.N. NUMBER AND REVISION COMMENTS |  | DATE |

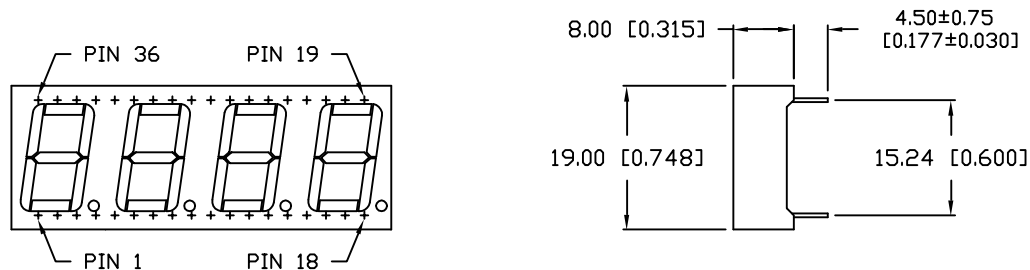


ELECTRO-OPTICAL CHARACTERISTICS  $T_A=25^\circ\text{C}$   $I_f=10\text{mA}$

| PARAMETER       | MIN                  | TYP       | MAX | UNITS          | TEST COND            |
|-----------------|----------------------|-----------|-----|----------------|----------------------|
| PEAK WAVELENGTH |                      | 660 (RED) |     | nm             |                      |
| FORWARD VOLTAGE |                      | 1.8       | 2.3 | $V_f$          |                      |
| REVERSE VOLTAGE | 4.0                  |           |     | $V_r$          | $I_r=100\mu\text{A}$ |
| AXIAL INTENSITY |                      | 13,300    |     | $\mu\text{cd}$ | $I_f=10\text{mA}$    |
| EMITTED COLOR:  | RED                  |           |     |                |                      |
| FACE COLOR:     | GRAY                 |           |     |                |                      |
| SEGMENT COLOR:  | MILKY WHITE DIFFUSED |           |     |                |                      |

LIMITS OF SAFE OPERATION AT  $25^\circ\text{C}$  PER CHIP

| PARAMETER                      | MAX        | UNITS                |
|--------------------------------|------------|----------------------|
| PEAK FORWARD CURRENT*          | 150        | mA                   |
| STEADY CURRENT                 | 30         | mA                   |
| POWER DISSIPATION              | 100        | mW                   |
| DERATE FROM $25^\circ\text{C}$ | -1.2       | mW/ $^\circ\text{C}$ |
| OPERATING, STORAGE TEMP.       | -20 TO +85 | $^\circ\text{C}$     |
| SOLDERING TEMP.                | +260       | $^\circ\text{C}$     |
| 2.0mm FROM BODY                |            | 3 SEC. MAX           |

\*  $t < 10\mu\text{s}$

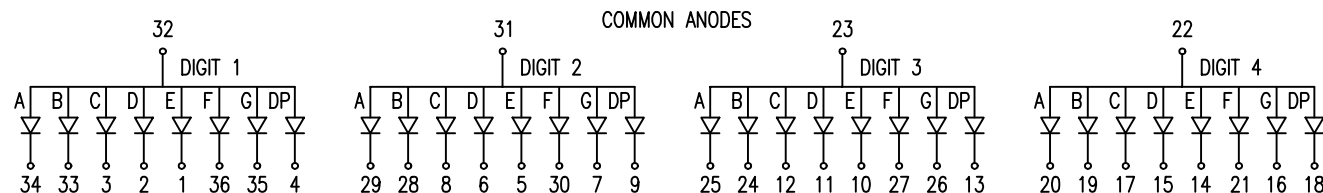

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCE IS  $\pm 0.25\text{mm}$  ( $\pm 0.010''$ )

|                                                                                                                             |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |                                                                                                                                                     |               |
|-----------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| REV.                                                                                                                        | PART NUMBER<br>LDQ-A516RI | <p>CONFIDENTIAL INFORMATION</p> <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.</p> <p>RELIABILITY NOTE</p> <p>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.</p> |             | <p><b>LUMEX</b><br/>INCORPORATED</p> <p>290 E. HELLEN ROAD<br/>PALATINE, ILLINOIS 60067<br/>PHONE: 1-847-359-2790<br/>WEB: HTTP://WWW.LUMEX.COM</p> |               |
| 0.56" QUAD DIGIT DISPLAY, RIGHT HAND DECIMAL, 660nm SUPER RED CHIPS, GRAY FACE, WHITE SEGMENTS, COMMON ANODE, DIRECT DRIVE. |                           | DRAWN BY:<br>DU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | CHECKED BY: | APPROVED BY:                                                                                                                                        | DATE: 5-11-99 |
|                                                                                                                             |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |                                                                                                                                                     | PAGE: 1 OF 1  |
|                                                                                                                             |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |                                                                                                                                                     | SCALE: N/A    |

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)