


### Previous (A6S) Model Upgraded to Surface-mounting Type with Increased Solder Heat Resistance



- Designed to enable replacement of previous (A6S) model, featuring the same dimensions and improved solder heat resistance (reflow peak solder temperature: 260°C).
- Gold-plated twin contacts and a slide-type, self-cleaning mechanism ensure high reliability.
- Washable models with seal tape available.
- Embossed tapping models available for automatic mounting. (Small reel also available)



RoHS Compliant




### ■List of Models

#### ● Models in Tube Packages

Type and actuator color		Flat actuator (White)		Raised actuator (White)
		Standard	With seal tape	
No. of poles	Minimum packing unit			
1	130	A6S-1101-H	A6S-1102-H	A6S-1104-H
2	76	A6S-2101-H	A6S-2102-H	A6S-2104-H
3	55	A6S-3101-H	A6S-3102-H	A6S-3104-H
4	42	A6S-4101-H	A6S-4102-H	A6S-4104-H
5	35	A6S-5101-H	A6S-5102-H	A6S-5104-H
6	28	A6S-6101-H	A6S-6102-H	A6S-6104-H
7	25	A6S-7101-H	A6S-7102-H	A6S-7104-H
8	22	A6S-8101-H	A6S-8102-H	A6S-8104-H
9	20	A6S-9101-H	A6S-9102-H	A6S-9104-H
10	18	A6S-0101-H	A6S-0102-H	A6S-0104-H

**Note:** Order in multiples of the package quantity.




### ● Models in Embossed Taping Packages (Standard reel)

Type and actuator color		Flat actuator (White)		Raised actuator (White)	
		Standard	With seal tape		
No. of poles	Minimum packing unit			Quantity per reel	
1	800	A6S-1101-PH	A6S-1102-PH	800	A6S-1104-PH
2	900	A6S-2101-PH	A6S-2102-PH	700	A6S-2104-PH
3		A6S-3101-PH	A6S-3102-PH	---	--- (See note 2.)
4		A6S-4101-PH	A6S-4102-PH	700	A6S-4104-PH
5		--- (See note 2.)	A6S-5102-PH	800	A6S-5104-PH
6		--- (See note 2.)	A6S-6102-PH	700	A6S-6104-PH
7		A6S-7101-PH	A6S-7102-PH	---	--- (See note 2.)
8		A6S-8101-PH	A6S-8102-PH	700	A6S-8104-PH
9		--- (See note 2.)	A6S-9102-PH	---	--- (See note 2.)
10		--- (See note 2.)	A6S-0102-PH	---	--- (See note 2.)

Note: 1. Order in multiples of the package quantity.

2. Models with a different number of poles than those listed here can also be ordered. For details, consult your OMRON sales representative.

### ● Models in Embossed Taping Packages (Small reel)

Type and actuator color		Flat actuator (White)		Raised actuator (White)
		Standard	With seal tape	
No. of poles	Minimum packing unit			
2	400	--- (See note 2.)	A6S-2102-PMH	--- (See note 2.)
3		A6S-3101-PMH	--- (See note 2.)	--- (See note 2.)
4		A6S-4101-PMH	A6S-4102-PMH	A6S-4104-PMH
6		A6S-6101-PMH	A6S-6102-PMH	A6S-6104-PMH
8		A6S-8101-PMH	A6S-8102-PMH	A6S-8104-PMH
10		A6S-0101-PMH	A6S-0102-PMH	A6S-0104-PMH

Note: 1. Order in multiples of the package quantity.

2. Models with a different number of poles than those listed here can also be ordered. For details, consult your OMRON sales representative.

### ■ Ratings/Characteristics



Rating (resistive load)		25 mA at 24 VDC 10 $\mu$ A (minimum current) at 3.5 VDC
Ambient operating temperature		-20 to +70°C at 60% max. (with no icing or condensation)
Ambient operating humidity		35% to 95% (at +5 to +35°C)
Insulation resistance		100 M $\Omega$ min. (at 250 VDC with insulation tester)
Contact resistance (initial value)		200 m $\Omega$ max.
Dielectric strength	Between terminals	500 VAC for 1 min
Vibration resistance	Malfunction	10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Malfunction	300 m/s <sup>2</sup> min.
Durability	Electrical	1,000 operations min.
Washing		Standard models: Not possible, Models with seal tape: Possible, Models with raised actuators: Not possible
Degree of protection		IEC IP40
Operating force		0.29 to 9.8 N {30 to 1,000 gf}
Weight		0.25 g (2 poles) 0.41 g (4 poles) 0.58 g (6 poles) 0.73 g (8 poles) 0.87 g (10 poles)

## ■Dimensions (Unit: mm)

### ● Flat Actuator


#### Standard/With Seal Tape

A6S-□101-H  
A6S-□101-PH  
A6S-□101-PMH  
A6S-□102-H  
A6S-□102-PH  
A6S-□102-PMH

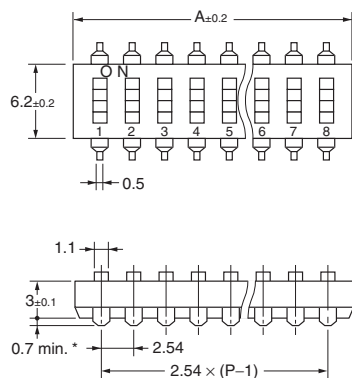


\* 1 pole type is 0 to 0.15 mm


#### Flat Actuator Standard



#### Flat Actuator With Seal Tape




#### Raised Actuator




### ● Raised Actuator

A6S-□104-H  
A6S-□104-PH  
A6S-□104-PMH



#### Dimensions of PCB Pad (Top View)




No. of poles	Model			Dimension A
	Flat Actuator		Raised Actuator	
	Standard	With Seal Tape		
1	A6S-1101-H	A6S-1102-H	A6S-1104-H	3.48
2	A6S-2101-H	A6S-2102-H	A6S-2104-H	6.02
3	A6S-3101-H	A6S-3102-H	A6S-3104-H	8.56
4	A6S-4101-H	A6S-4102-H	A6S-4104-H	11.10
5	A6S-5101-H	A6S-5102-H	A6S-5104-H	13.64
6	A6S-6101-H	A6S-6102-H	A6S-6104-H	16.18
7	A6S-7101-H	A6S-7102-H	A6S-7104-H	18.72
8	A6S-8101-H	A6S-8102-H	A6S-8104-H	21.26
9	A6S-9101-H	A6S-9102-H	A6S-9104-H	23.80
10	A6S-0101-H	A6S-0102-H	A6S-0104-H	26.34

**Note:** Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions.

## ■Internal Connections

### Contact Form (Top View)



## ■Precautions

Be sure to read the Safety precautions common to all DIP Switches for correct use.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**

---

**OMRON Corporation**  
Electronic and Mechanical Components Company

**Contact:** [www.omron.com/ecb](http://www.omron.com/ecb)

**Cat. No. A211-E1-02**  
1014(0207)(O)

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)