

# MC14528B

## Dual Monostable Multivibrator

The MC14528B is a dual, retriggerable, resettable monostable multivibrator. It may be triggered from either edge of an input pulse, and produces an output pulse over a wide range of widths, the duration of which is determined by the external timing components,  $C_X$  and  $R_X$ .

### Features

- Separate Reset Available
- Diode Protection on All Inputs
- Triggerable from Leading or Trailing Edge Pulse
- Supply Voltage Range = 3.0 Vdc to 18 Vdc
- Capable of Driving Two Low-power TTL Loads or One Low-power Schottky TTL Load Over the Rated Temperature Range
- This part should only be used in new designs where the pulse width is  $< 10 \mu s$   
Note: For designs requiring a pulse width  $> 10 \mu s$ , please see MC14538, which is pin-for-pin compatible
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- This Device is Pb-Free and is RoHS Compliant

### MAXIMUM RATINGS (Voltages Referenced to $V_{SS}$ )

| Rating                                            | Symbol            | Value                  | Unit |
|---------------------------------------------------|-------------------|------------------------|------|
| DC Supply Voltage Range                           | $V_{DD}$          | -0.5 to +18.0          | V    |
| Input or Output Voltage Range (DC or Transient)   | $V_{in}, V_{out}$ | -0.5 to $V_{DD} + 0.5$ | V    |
| Input or Output Current (DC or Transient) per Pin | $I_{in}, I_{out}$ | $\pm 10$               | mA   |
| Power Dissipation, per Package (Note 1)           | $P_D$             | 500                    | mW   |
| Ambient Temperature Range                         | $T_A$             | -55 to +125            | °C   |
| Storage Temperature Range                         | $T_{stg}$         | -65 to +150            | °C   |
| Lead Temperature (8-Second Soldering)             | $T_L$             | 260                    | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Temperature Derating: "D/DW" Package: -7.0 mW/°C From 65°C To 125°C


This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range  $V_{SS} \leq (V_{in} \text{ or } V_{out}) \leq V_{DD}$ .

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either  $V_{SS}$  or  $V_{DD}$ ). Unused outputs must be left open.




ON Semiconductor®

<http://onsemi.com>




1  
SOIC-16  
D SUFFIX  
CASE 751B

### PIN ASSIGNMENT

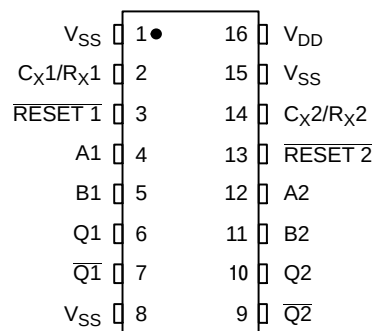

### MARKING DIAGRAM




A = Assembly Location  
WL = Wafer Lot  
YY, Y = Year  
WW, W = Work Week  
G = Pb-Free Package

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

# MC14528B


## ONE-SHOT SELECTION GUIDE

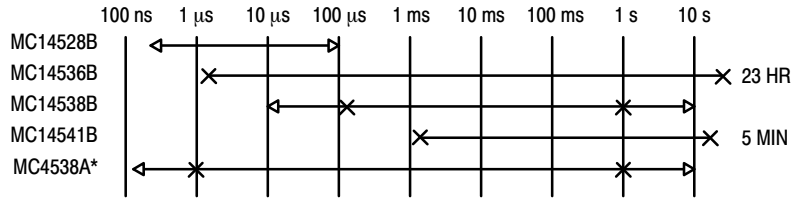

\*LIMITED OPERATING VOLTAGE (2-6 V)

TOTAL OUTPUT PULSE WIDTH RANGE  $\longleftrightarrow$   
RECOMMENDED PULSE WIDTH RANGE  $\times \longleftrightarrow \times$

## BLOCK DIAGRAM

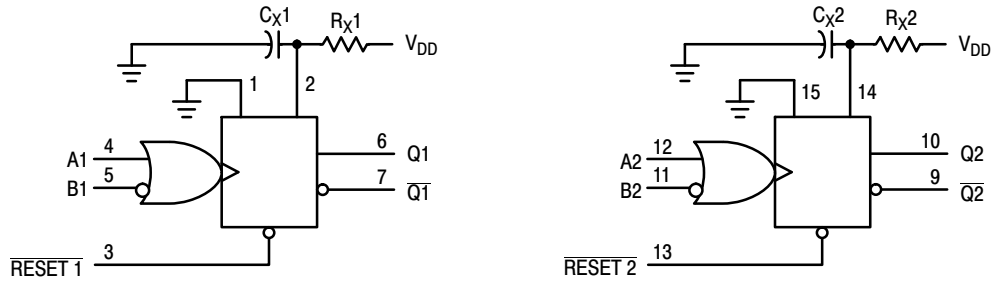

$V_{DD}$  = PIN 16  
 $V_{SS}$  = PIN 1, PIN 8, PIN 15  
 $R_X$  AND  $C_X$  ARE EXTERNAL COMPONENTS

## FUNCTION TABLE

| Inputs              |                     |                     | Outputs       |               |
|---------------------|---------------------|---------------------|---------------|---------------|
| Reset               | A                   | B                   | Q             | $\bar{Q}$     |
| H                   | $\nearrow$          | H                   | $\square$     | $\square$     |
| H                   | L                   | $\searrow$          | $\square$     | $\square$     |
| H                   | $\searrow \nearrow$ | L                   | Not Triggered | Not Triggered |
| H                   | H                   | $\searrow \nearrow$ | Not Triggered | Not Triggered |
| H                   | L, H, $\searrow$    | H                   | Not Triggered | Not Triggered |
| H                   | L                   | L, H, $\nearrow$    | Not Triggered | Not Triggered |
| L                   | X                   | X                   | L             | H             |
| $\searrow \nearrow$ | X                   | X                   | Not Triggered | Not Triggered |

# MC14528B

## ELECTRICAL CHARACTERISTICS (Voltages Referenced to V<sub>SS</sub>)

| Characteristic                                                                                                                                         | Symbol          | V <sub>DD</sub><br>Vdc | - 55°C                                                                                                                                                                                                                                                                     |                      | 25°C                          |                                |                      | 125°C                         |                      | Unit |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------------|--------------------------------|----------------------|-------------------------------|----------------------|------|
|                                                                                                                                                        |                 |                        | Min                                                                                                                                                                                                                                                                        | Max                  | Min                           | Typ<br>(Note 2)                | Max                  | Min                           | Max                  |      |
| Output Voltage<br>V <sub>in</sub> = V <sub>DD</sub> or 0                                                                                               | V <sub>OL</sub> | 5.0<br>10<br>15        | –<br>–<br>–                                                                                                                                                                                                                                                                | 0.05<br>0.05<br>0.05 | –<br>–<br>–                   | 0<br>0<br>0                    | 0.05<br>0.05<br>0.05 | –<br>–<br>–                   | 0.05<br>0.05<br>0.05 | Vdc  |
|                                                                                                                                                        | V <sub>OH</sub> | 5.0<br>10<br>15        | 4.95<br>9.95<br>14.95                                                                                                                                                                                                                                                      | –<br>–<br>–          | 4.95<br>9.95<br>14.95         | 5.0<br>10<br>15                | –<br>–<br>–          | 4.95<br>9.95<br>14.95         | –<br>–<br>–          | Vdc  |
| Input Voltage<br>(V <sub>O</sub> = 4.5 or 0.5 Vdc)<br>(V <sub>O</sub> = 9.0 or 1.0 Vdc)<br>(V <sub>O</sub> = 13.5 or 1.5 Vdc)                          | V <sub>IL</sub> | 5.0<br>10<br>15        | –<br>–<br>–                                                                                                                                                                                                                                                                | 1.5<br>3.0<br>4.0    | –<br>–<br>–                   | 2.25<br>4.50<br>6.75           | 1.5<br>3.0<br>4.0    | –<br>–<br>–                   | 1.5<br>3.0<br>4.0    | Vdc  |
|                                                                                                                                                        | V <sub>IH</sub> | 5.0<br>10<br>15        | 3.5<br>7.0<br>11                                                                                                                                                                                                                                                           | –<br>–<br>–          | 3.5<br>7.0<br>11              | 2.75<br>5.50<br>8.25           | –<br>–<br>–          | 3.5<br>7.0<br>11              | –<br>–<br>–          | Vdc  |
| Output Drive Current<br>(V <sub>OH</sub> = 2.5 Vdc)<br>(V <sub>OH</sub> = 4.6 Vdc)<br>(V <sub>OH</sub> = 9.5 Vdc)<br>(V <sub>OH</sub> = 13.5 Vdc)      | I <sub>OH</sub> | 5.0<br>5.0<br>10<br>15 | –1.2<br>–0.64<br>–1.6<br>–4.2                                                                                                                                                                                                                                              | –<br>–<br>–<br>–     | –1.0<br>–0.51<br>–1.3<br>–3.4 | –1.7<br>–0.88<br>–2.25<br>–8.8 | –<br>–<br>–<br>–     | –0.7<br>–0.36<br>–0.9<br>–2.4 | –<br>–<br>–<br>–     | mAdc |
|                                                                                                                                                        | I <sub>OL</sub> | 5.0<br>10<br>15        | 0.64<br>1.6<br>4.2                                                                                                                                                                                                                                                         | –<br>–<br>–          | 0.51<br>1.3<br>3.4            | 0.88<br>2.25<br>8.8            | –<br>–<br>–          | 0.36<br>0.9<br>2.4            | –<br>–<br>–          | mAdc |
| Input Current                                                                                                                                          | I <sub>in</sub> | 15                     | –                                                                                                                                                                                                                                                                          | ±0.1                 | –                             | ±0.00001                       | ±0.1                 | –                             | ±1.0                 | μAdc |
| Input Capacitance<br>(V <sub>in</sub> = 0)                                                                                                             | C <sub>in</sub> | –                      | –                                                                                                                                                                                                                                                                          | –                    | –                             | 5.0                            | 7.5                  | –                             | –                    | pF   |
| Quiescent Current<br>(Per Package)                                                                                                                     | I <sub>DD</sub> | 5.0<br>10<br>15        | –<br>–<br>–                                                                                                                                                                                                                                                                | 5.0<br>10<br>20      | –<br>–<br>–                   | 0.005<br>0.010<br>0.015        | 5.0<br>10<br>20      | –<br>–<br>–                   | 150<br>300<br>600    | μAdc |
| Total Supply Current at an external load Capacitance (C <sub>L</sub> ) and at external timing capacitance (C <sub>X</sub> ), use the formula. (Note 3) | I <sub>T</sub>  | –                      | $I_T(C_L, C_X) = [(C_L + 0.36C_X)V_{DD}f + 2 \times 10^{-8} R_X C_X (V_{DD}^{-2})^2 f] \times 10^{-3}$ where: I <sub>T</sub> in μA (per circuit), C <sub>L</sub> and C <sub>X</sub> in pF, R <sub>X</sub> in megohms, V <sub>DD</sub> in Vdc, f in kHz is input frequency. |                      |                               |                                |                      |                               |                      | μAdc |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

3. The formulas given are for the typical characteristics only at 25°C.

# MC14528B

## SWITCHING CHARACTERISTICS ( $C_L = 50 \text{ pF}$ , $T_A = 25^\circ\text{C}$ ) (Note 4)

| Characteristic                                                                                                                                                                                                                                                       | Symbol                   | $C_X$<br>pF | $R_X$<br>k $\Omega$ | $V_{DD}$<br>Vdc | Min                | Typ<br>(Note 5)    | Max               | Unit          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------|---------------------|-----------------|--------------------|--------------------|-------------------|---------------|
| Output Rise and Fall Time<br>$t_{TLH}$ , $t_{THL} = (1.5 \text{ ns/pF}) C_L + 25 \text{ ns}$<br>$t_{TLH}$ , $t_{THL} = (0.75 \text{ ns/pF}) C_L + 12.5 \text{ ns}$<br>$t_{TLH}$ , $t_{THL} = (0.55 \text{ ns/pF}) C_L + 9.5 \text{ ns}$                              | $t_{TLH}$ ,<br>$t_{THL}$ | —           | —                   | 5.0<br>10<br>15 | —<br>—<br>—        | 100<br>50<br>40    | 200<br>100<br>80  | ns            |
| Turn-Off, Turn-On Delay Time — A or B to Q or $\bar{Q}$<br>$t_{PLH}$ , $t_{PHL} = (1.7 \text{ ns/pF}) C_L + 240 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.66 \text{ ns/pF}) C_L + 87 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.5 \text{ ns/pF}) C_L + 65 \text{ ns}$   | $t_{PLH}$ ,<br>$t_{PHL}$ | 15          | 5.0                 | 5.0<br>10<br>15 | —<br>—<br>—        | 325<br>120<br>90   | 650<br>240<br>180 | ns            |
| Turn-Off, Turn-On Delay Time — A or B to Q or $\bar{Q}$<br>$t_{PLH}$ , $t_{PHL} = (1.7 \text{ ns/pF}) C_L + 620 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.66 \text{ ns/pF}) C_L + 257 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.5 \text{ ns/pF}) C_L + 185 \text{ ns}$ | $t_{PLH}$ ,<br>$t_{PHL}$ | 1000        | 10                  | 5.0<br>10<br>15 | —<br>—<br>—        | 705<br>290<br>210  | —<br>—<br>—       | ns            |
| Input Pulse Width — A or B                                                                                                                                                                                                                                           | $t_{WH}$                 | 15          | 5.0                 | 5.0<br>10<br>15 | 150<br>75<br>55    | 70<br>30<br>30     | —<br>—<br>—       | ns            |
|                                                                                                                                                                                                                                                                      | $t_{WL}$                 | 1000        | 10                  | 5.0<br>10<br>15 | —<br>—<br>—        | 70<br>30<br>30     | —<br>—<br>—       | ns            |
| Output Pulse Width — Q or $\bar{Q}$<br>(For $C_X < 0.01 \mu\text{F}$ use graph for appropriate $V_{DD}$ level.)                                                                                                                                                      | $t_W$                    | 15          | 5.0                 | 5.0<br>10<br>15 | —<br>—<br>—        | 550<br>350<br>300  | —<br>—<br>—       | ns            |
| Output Pulse Width — Q or $\bar{Q}$<br>(For $C_X > 0.01 \mu\text{F}$ use formula:<br>$t_W = 0.2 R_X C_X \ln [V_{DD} - V_{SS}]$ ) (Note 6)                                                                                                                            | $t_W$                    | 10,000      | 10                  | 5.0<br>10<br>15 | 15<br>10<br>15     | 30<br>50<br>55     | 45<br>90<br>95    | $\mu\text{s}$ |
| Pulse Width Match between Circuits in the same package                                                                                                                                                                                                               | $t_1 - t_2$              | 10,000      | 10                  | 5.0<br>10<br>15 | —<br>—<br>—        | 6.0<br>8.0<br>8.0  | 25<br>35<br>35    | %             |
| Reset Propagation Delay — $\overline{\text{Reset}}$ to Q or $\bar{Q}$                                                                                                                                                                                                | $t_{PLH}$ ,<br>$t_{PHL}$ | 15          | 5.0                 | 5.0<br>10<br>15 | —<br>—<br>—        | 325<br>90<br>60    | 600<br>225<br>170 | ns            |
|                                                                                                                                                                                                                                                                      |                          | 1000        | 10                  | 5.0<br>10<br>15 | —<br>—<br>—        | 1000<br>300<br>250 | —<br>—<br>—       | ns            |
| Retrigger Time                                                                                                                                                                                                                                                       | $t_{rr}$                 | 15          | 5.0                 | 5.0<br>10<br>15 | 0<br>0<br>0        | —<br>—<br>—        | —<br>—<br>—       | ns            |
|                                                                                                                                                                                                                                                                      |                          | 1000        | 10                  | 5.0<br>10<br>15 | 0<br>0<br>0        | —<br>—<br>—        | —<br>—<br>—       | ns            |
| External Timing Resistance                                                                                                                                                                                                                                           | $R_X$                    | —           | —                   | —               | 5.0                | —                  | 1000              | k $\Omega$    |
| External Timing Capacitance                                                                                                                                                                                                                                          | $C_X$                    | —           | —                   | —               | No Limits (Note 7) |                    |                   | $\mu\text{F}$ |

4. The formulas given are for the typical characteristics only at  $25^\circ\text{C}$ .

5. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

6. If  $C_X > 15 \mu\text{F}$ , Use Discharge Protection Diode  $D_X$ , per Figure 9.

7.  $R_X$  is in  $\Omega$ ,  $C_X$  is in farads,  $V_{DD}$  and  $V_{SS}$  in volts,  $PW_{out}$  in seconds.

# MC14528B

## ORDERING INFORMATION

| Device         | Package              | Shipping <sup>†</sup> |
|----------------|----------------------|-----------------------|
| MC14528BDG     | SOIC-16<br>(Pb-Free) | 48 Units / Rail       |
| MC14528BDR2G   | SOIC-16<br>(Pb-Free) | 2500 / Tape & Reel    |
| NLV14528BDR2G* | SOIC-16<br>(Pb-Free) | 2500 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

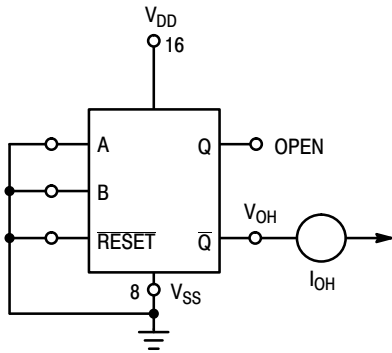


Figure 1. Output Source Current Test Circuit

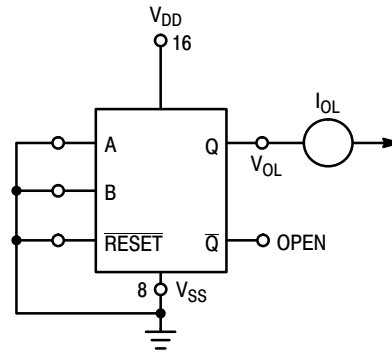


Figure 2. Output Sink Current Test Circuit




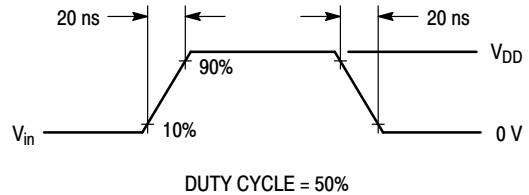


Figure 3. Power Dissipation Test Circuit and Waveforms


## MC14528B

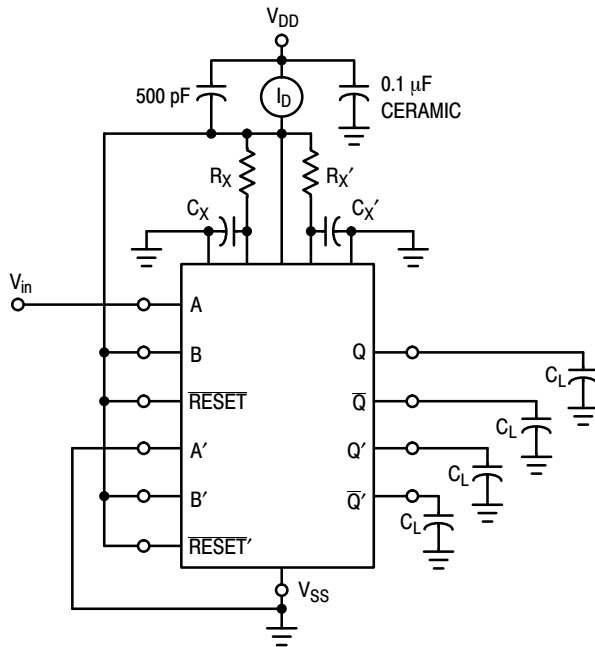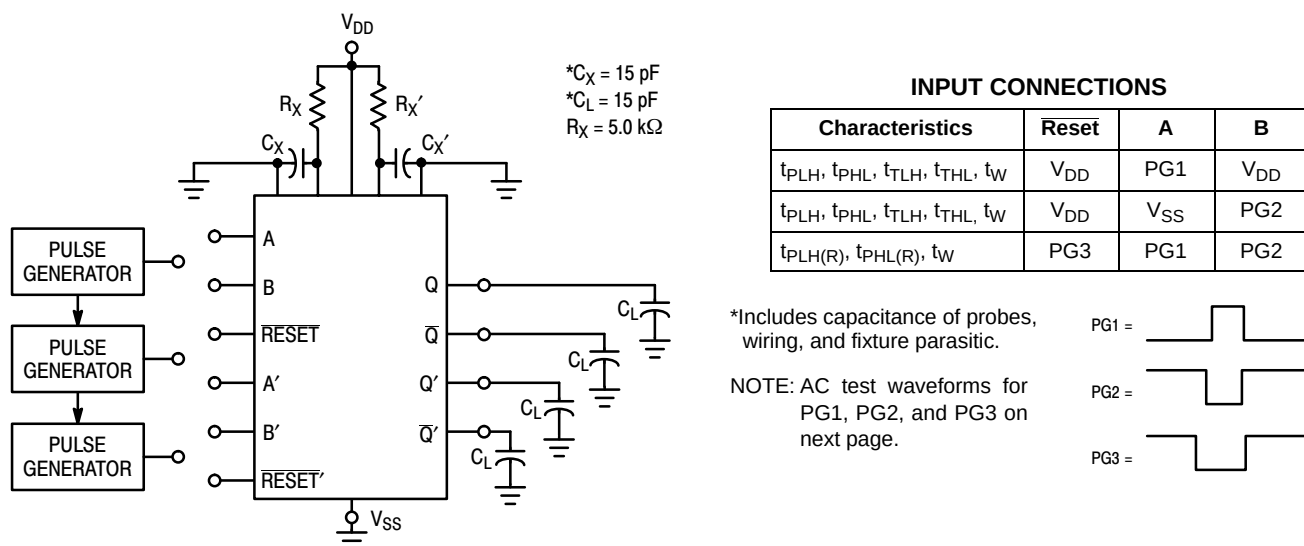

**Figure 4. AC Test Circuit**

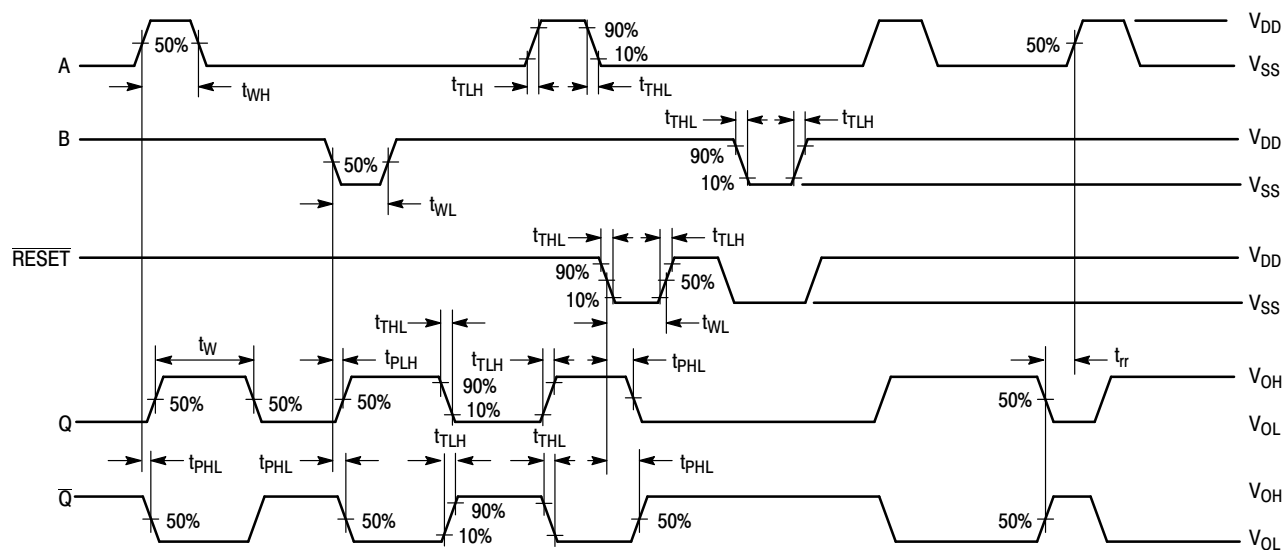

### Figure 5. AC Test Waveforms

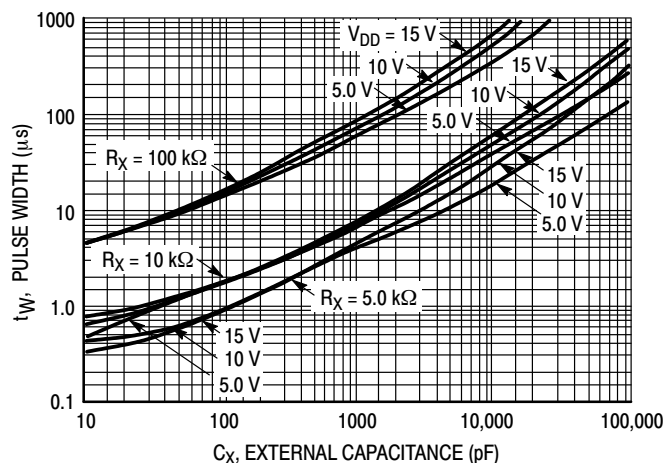

**Figure 6. Pulse Width versus  $C_x$**

TYPICAL APPLICATIONS

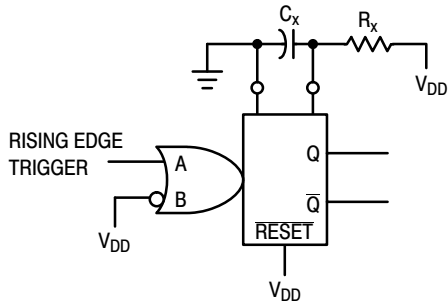


Figure 7. Retriggerable Monostables Circuitry

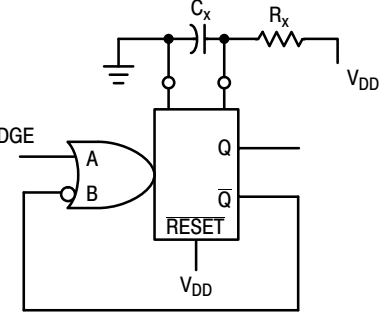
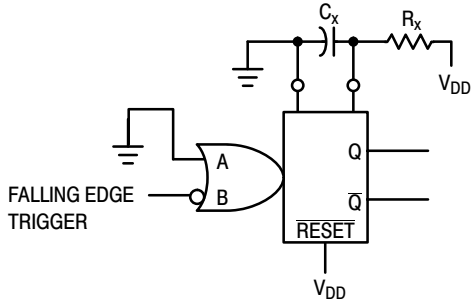


Figure 8. Non-Retriggerable Monostables Circuitry

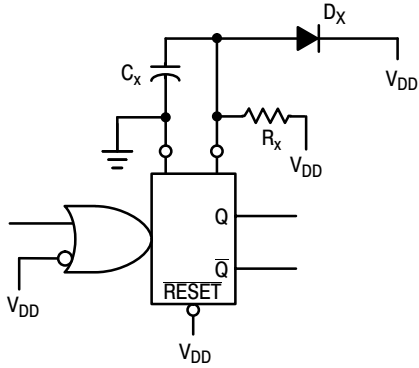


Figure 9. Use of a Diode to Limit Power Down Current Surge


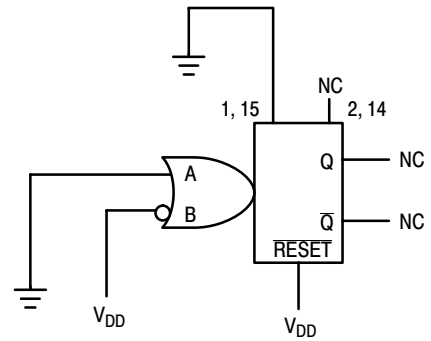


Figure 10. Connection of Unused Sections

# MC14528B

## PACKAGE DIMENSIONS

SOIC-16  
CASE 751B-05  
ISSUE K

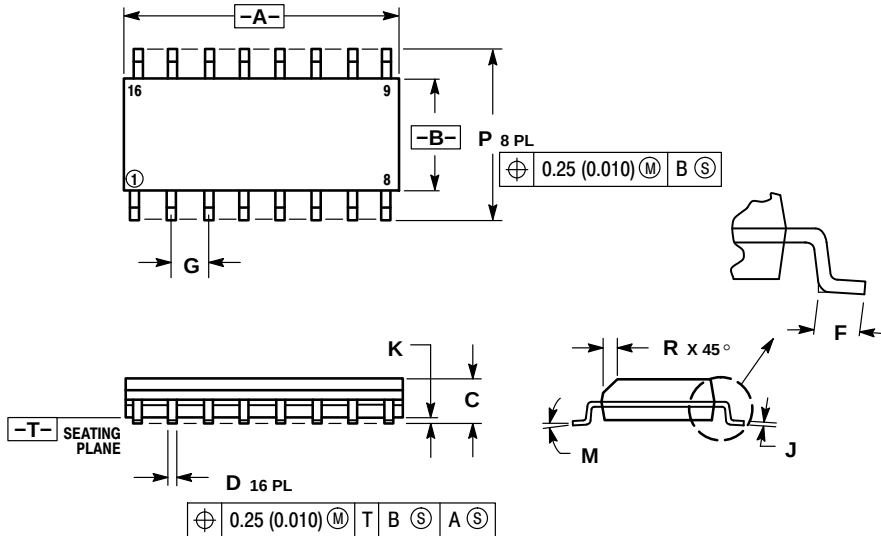


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.386     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| E   | 0.40        | 1.25  | 0.016     | 0.049 |
| F   | 1.27 BSC    |       | 0.050 BSC |       |
| G   | 0.19        | 0.25  | 0.008     | 0.009 |
| H   | 0.10        | 0.25  | 0.004     | 0.009 |
| I   | 0°          | 7°    | 0°        | 7°    |
| J   | 5.80        | 6.20  | 0.229     | 0.244 |
| K   | 0.25        | 0.50  | 0.010     | 0.019 |

## SOLDERING FOOTPRINT

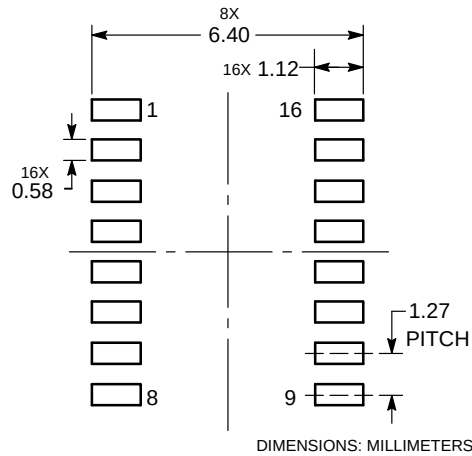

ECLinPS is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com