



**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**



MICROWAVE CORPORATION v00.1108



# HMC758LP3 / 758LP3E


## GaAs SMT pHEMT LOW NOISE AMPLIFIER, 700 - 2200 MHz

### Typical Applications

The HMC758LP3(E) is ideal for:

- Cellular Infrastructure, WiMAX & LTE/4G
- Software Defined Radios
- Repeaters and Femtocells
- Access Points
- Test & Measurement Equipment

### Functional Diagram

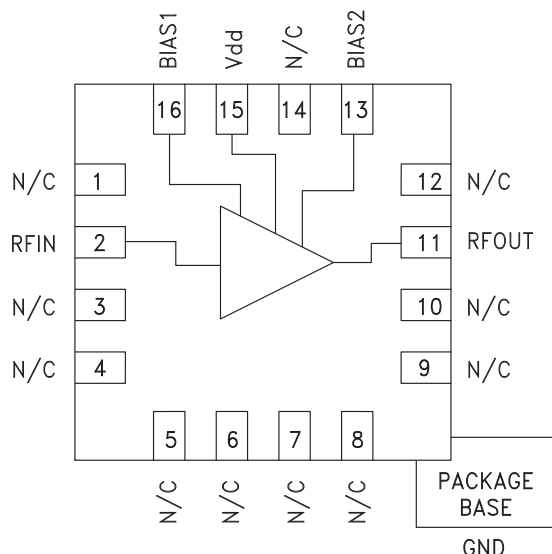

### Features

Noise Figure: 1.7 dB

Gain: 22 dB

Output IP3: +37 dBm

Single Supply: +3V to +5V

50 Ohm Matched Input/Output

16 Lead 3x3 mm SMT Package: 9 mm<sup>2</sup>

### General Description

The HMC758LP3(E) is a GaAs pHEMT MMIC Low Noise Amplifier that is ideal for Cellular Infrastructure, WiMAX & LTE/4G basestation front-end receivers operating between 700 and 2200 MHz. The amplifier has been optimized to provide 1.7 dB noise figure, 21 dB gain and +37 dBm output IP3 from a single supply of +5V. Input and output return losses are excellent with minimal external matching and bias decoupling components. The HMC758LP3(E) can be biased with +3V to +5V and features an externally adjustable supply current, which allows the designer to tailor the linearity performance of the LNA for each application.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $R1 = 390\Omega$ , $R2 = 560\Omega^*$

| Parameter                                | Vdd = +3V  |       |      |             |      |      | Vdd = +5V  |       |      |             |      |      | Units |
|------------------------------------------|------------|-------|------|-------------|------|------|------------|-------|------|-------------|------|------|-------|
|                                          | Min.       | Typ.  | Max. | Min.        | Typ. | Max. | Min.       | Typ.  | Max. | Min.        | Typ. | Max. |       |
| Frequency Range                          | 700 - 1700 |       |      | 1700 - 2200 |      |      | 700 - 1700 |       |      | 1700 - 2200 |      |      | MHz   |
| Gain                                     | 19         | 21.8  |      | 16          | 19.4 |      | 20         | 22.7  |      | 18          | 21.3 |      | dB    |
| Gain Variation Over Temperature          |            | 0.005 |      |             | 0.01 |      |            | 0.004 |      |             | 0.01 |      | dB/°C |
| Noise Figure                             |            | 1.6   | 2.5  |             | 1.4  | 1.8  |            | 1.7   | 2.6  |             | 1.6  | 2.0  | dB    |
| Input Return Loss                        |            | 15    |      |             | 13   |      |            | 14    |      |             | 14   |      | dB    |
| Output Return Loss                       |            | 11    |      |             | 15   |      |            | 10    |      |             | 12   |      | dB    |
| Output Power for 1 dB Compression (P1dB) | 16         | 18    |      | 18          | 20   |      | 20.5       | 22.5  |      | 22          | 24   |      | dBm   |
| Saturated Output Power (Psat)            |            | 20    |      |             | 21.5 |      |            | 23.5  |      |             | 25   |      | dBm   |
| Output Third Order Intercept (IP3)       |            | 31    |      |             | 31.5 |      |            | 36    |      |             | 35   |      | dBm   |
| Supply Current (Idd)                     | 80         | 102   | 130  | 80          | 102  | 130  | 190        | 227   | 260  | 190         | 227  | 260  | mA    |


\* R1 & R2 resistors set current, see application circuit herein

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)


**Broadband Gain & Return Loss**

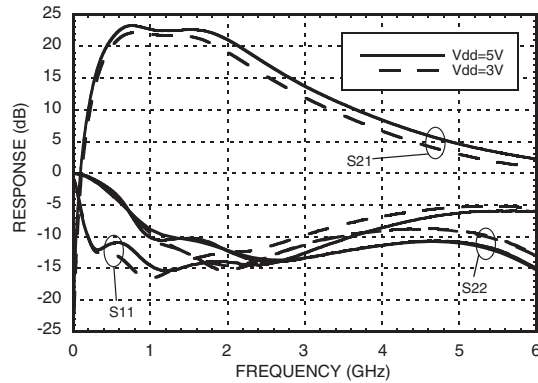


**Gain vs. Temperature, Vdd = +5V**

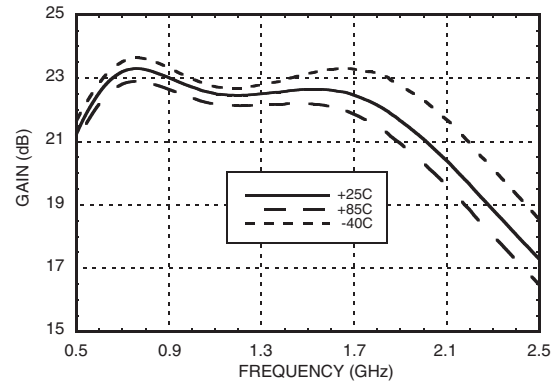


**Gain vs. Temperature, Vdd = +3V**

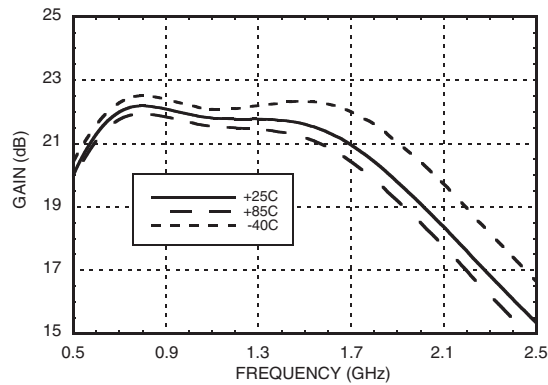


**Input Return Loss vs. Temperature, Vdd = +5V**

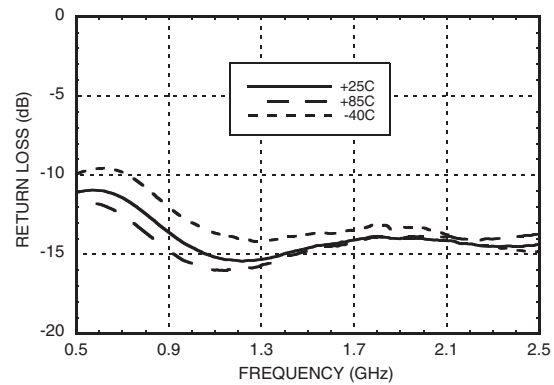

**Output Return Loss vs. Temperature, Vdd = +5V**

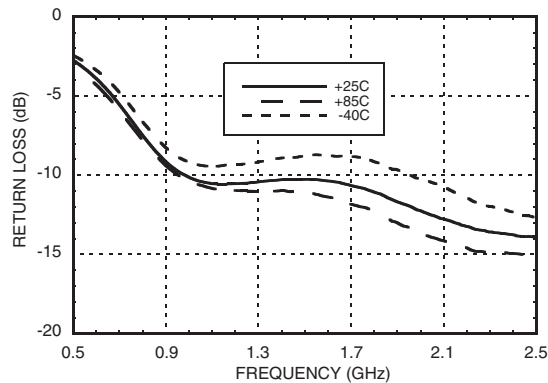


**Reverse Isolation vs. Temperature, Vdd = +5V**

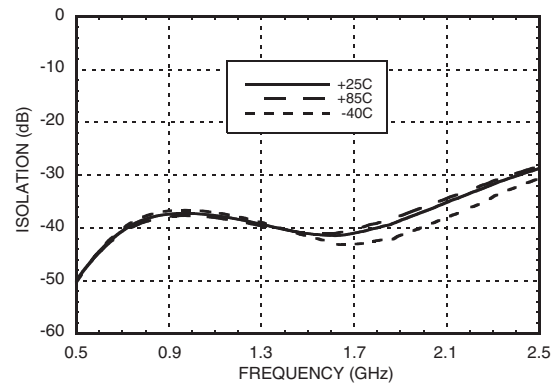


# HMC758LP3 / 758LP3E

## GaAs SMT pHEMT LOW NOISE AMPLIFIER, 700 - 2200 MHz


**Noise Figure vs. Temperature [1]**

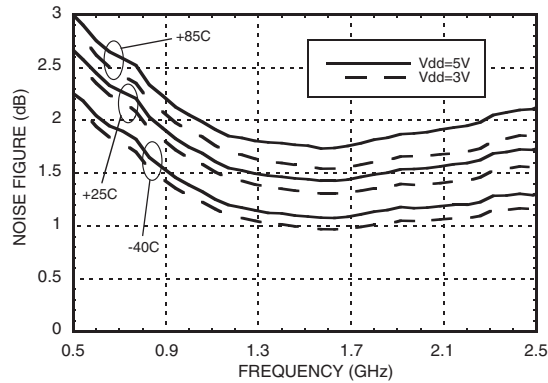


**Output IP3 vs. Temperature**

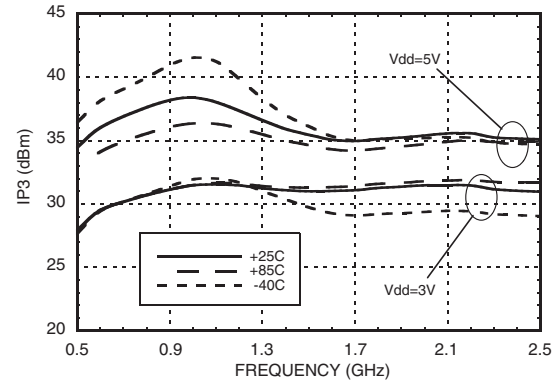


**Output IP3 and Supply Current vs. Supply Voltage @ 900 MHz**

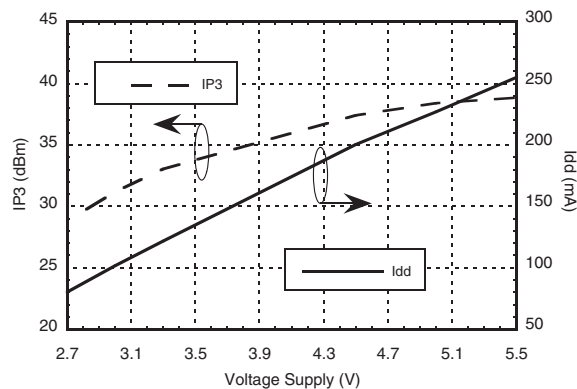


**Output IP3 and Supply Current vs. Supply Voltage @ 1900 MHz**

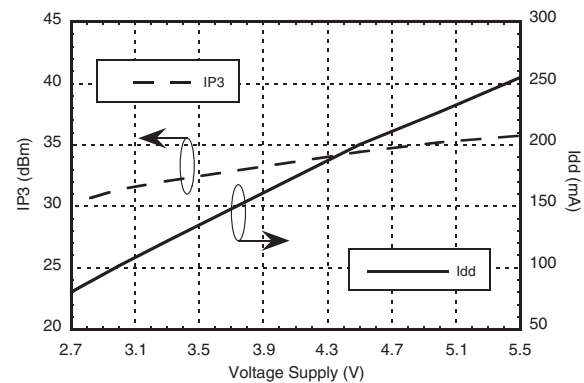

**Output IP3 vs. Output Power @ 900 MHz**

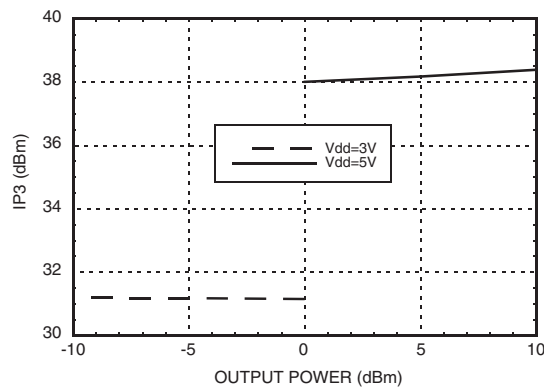

**Output IP3 vs. Output Power @ 1900 MHz**

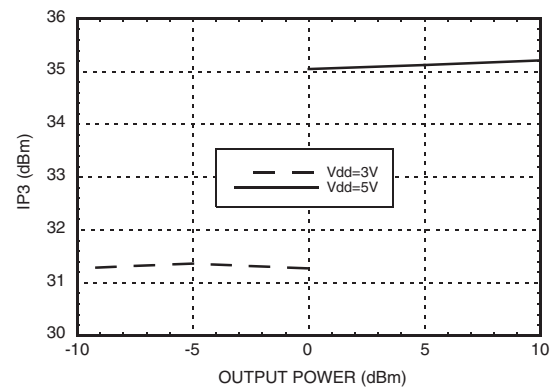

[1] Measurement reference plane shown on evaluation PCB drawing.


# HMC758LP3 / 758LP3E

## GaAs SMT pHEMT LOW NOISE AMPLIFIER, 700 - 2200 MHz


7

AMPLIFIERS - LOW NOISE - SMT


**Power Compression @ 900 MHz [1]**

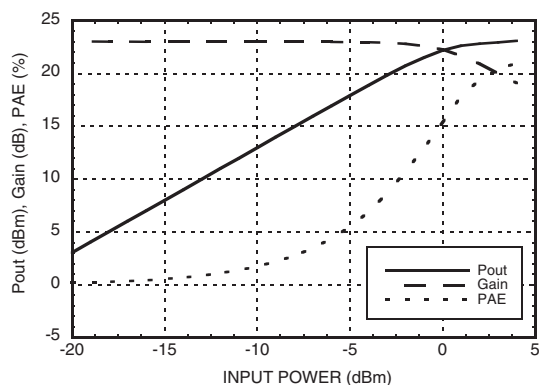


**Power Compression @ 900 MHz [2]**

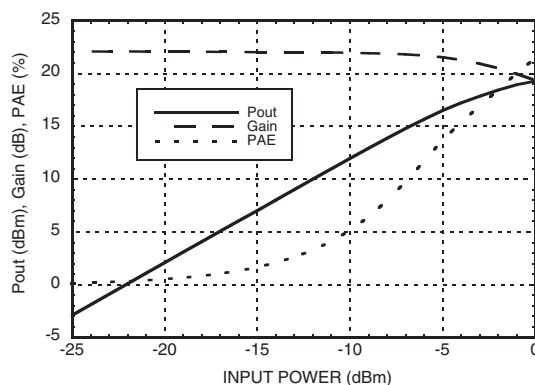

**Power Compression @ 1900 MHz [1]**

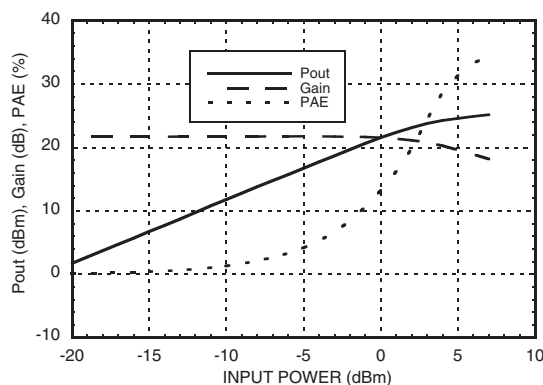

**Power Compression @ 1900 MHz [2]**

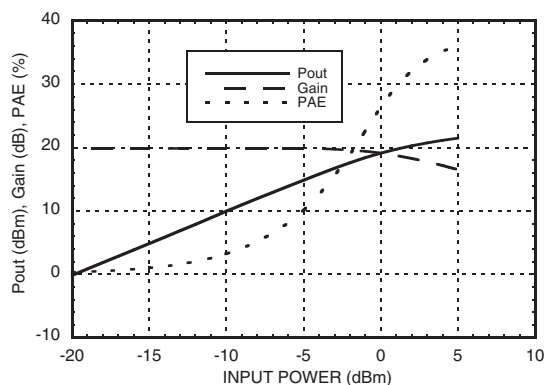

### Recommended Bias Resistor Values for Idd

| Vdd (V) | R1 (Ohms) | R2 (Ohms) | Idd (mA) |
|---------|-----------|-----------|----------|
| 3V      | 390       | 560       | 102      |
| 3V      | 1k        | 1.5k      | 85       |
| 3V      | 3.3k      | 4.7k      | 54       |
| 5V      | 390       | 560       | 227      |
| 5V      | 1k        | 1.5k      | 190      |
| 5V      | 3.3k      | 4.7k      | 124      |

### Absolute Min/Max Bias Resistor Range

| Max       |           | Min       |           |
|-----------|-----------|-----------|-----------|
| R1 (Ohms) | R2 (Ohms) | R1 (Ohms) | R2 (Ohms) |
| 3.9k      | 5.6k      | 270       | 470       |

### Typical Supply Current vs. Vdd (R1 = 390Ω, R2 = 560Ω)

| Vdd (V) | Idd (mA) |
|---------|----------|
| 2.7     | 80       |
| 3       | 102      |
| 3.3     | 122      |
| 4.5     | 200      |
| 5       | 227      |
| 5.5     | 255      |

Note: Amplifier will operate over full voltage range shown above.


[1] Vdd = 5V [2] Vdd = 3V



MICROWAVE CORPORATION v00.1108

**HMC758LP3 / 758LP3E****GaAs SMT pHEMT LOW NOISE  
AMPLIFIER, 700 - 2200 MHz****Absolute Maximum Ratings**

|                                                                          |                |
|--------------------------------------------------------------------------|----------------|
| Drain Bias Voltage (Vdd)                                                 | +6 V           |
| RF Input Power (RFIN)<br>(Vdd = +5V)                                     | +5 dBm         |
| Channel Temperature                                                      | 150 °C         |
| Continuous P <sub>diss</sub> (T= 85 °C)<br>(derate 20 mW/°C above 85 °C) | 1.3 W          |
| Thermal Resistance<br>(channel to ground paddle)                         | 50 °C/W        |
| Storage Temperature                                                      | -65 to +150 °C |
| Operating Temperature                                                    | -40 to +85 °C  |

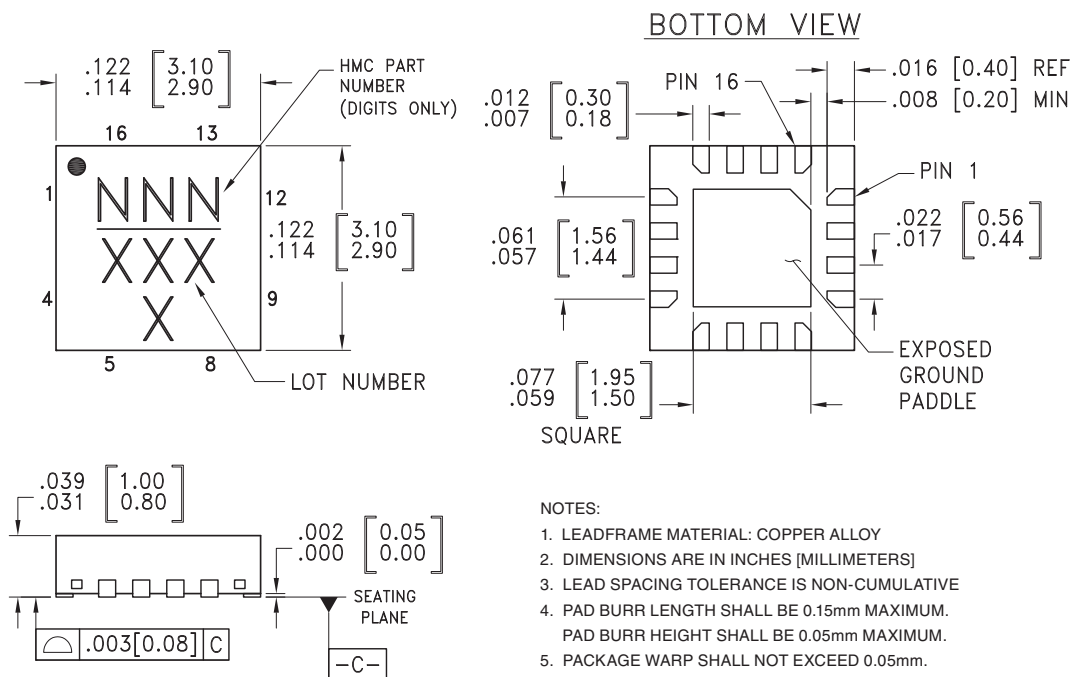**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS****Outline Drawing****Package Information**

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|----------------------------------------------------|---------------|---------------------|--------------------------------|
| HMC758LP3   | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | 758<br>XXXX                    |
| HMC758LP3E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | 758<br>XXXX                    |

[1] Max peak reflow temperature of 235 °C






[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)

### Pin Descriptions


| Pin Number                  | Function | Description                                                                                                                           | Interface Schematic                                                                   |
|-----------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1, 3 - 6,<br>7 - 10, 12, 14 | N/C      | No connection required. These pins may be connected to RF/DC ground without affecting performance.                                    |                                                                                       |
| 2                           | RFIN     | This pin is DC coupled. An off-chip DC blocking capacitor is required.                                                                |    |
| 11                          | RFOUT    | This pin is DC coupled. An off-chip DC blocking capacitor is required.                                                                |    |
| 13                          | BIAS2    | This pin is used to set the DC current of the second stage amplifier by selection of external bias resistor. See application circuit. |    |
| 15                          | Vdd      | Power Supply Voltage for the amplifier. Bypass capacitors are required. See application circuit.                                      |   |
| 16                          | BIAS1    | This pin is used to set the DC current of the first stage amplifier by selection of external bias resistor. See application circuit.  |  |



MICROWAVE CORPORATION v00.1108

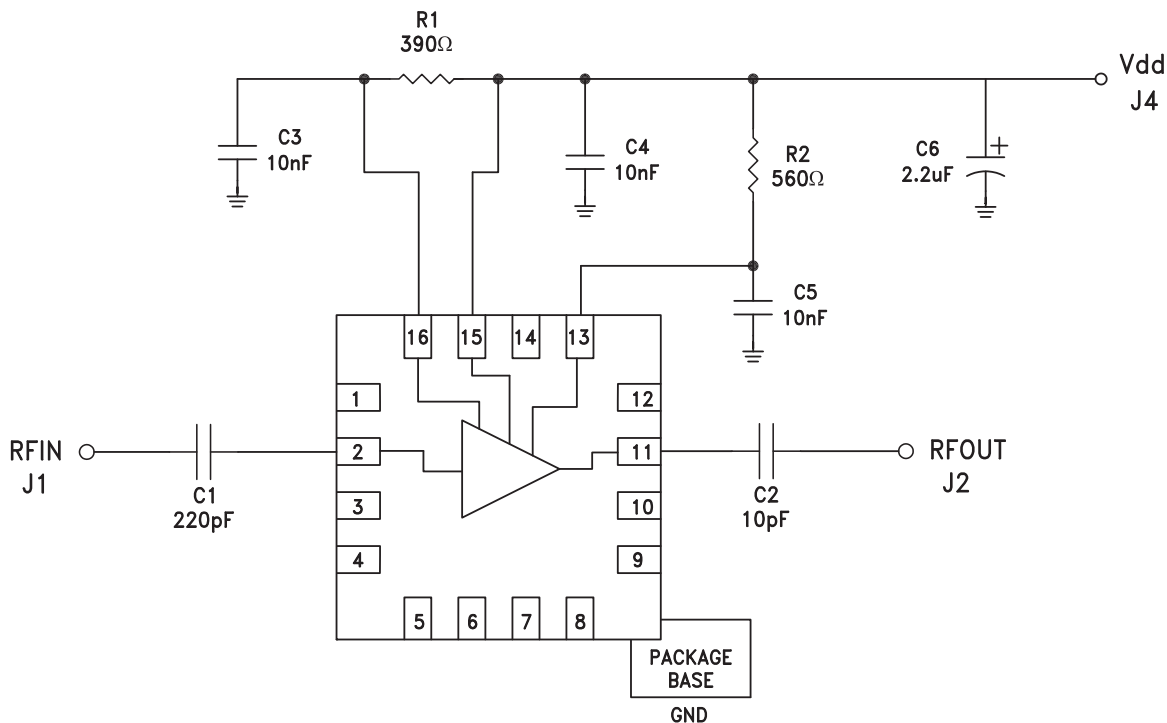**HMC758LP3 / 758LP3E****GaAs SMT pHEMT LOW NOISE  
AMPLIFIER, 700 - 2200 MHz****Application Circuit**

### Evaluation PCB

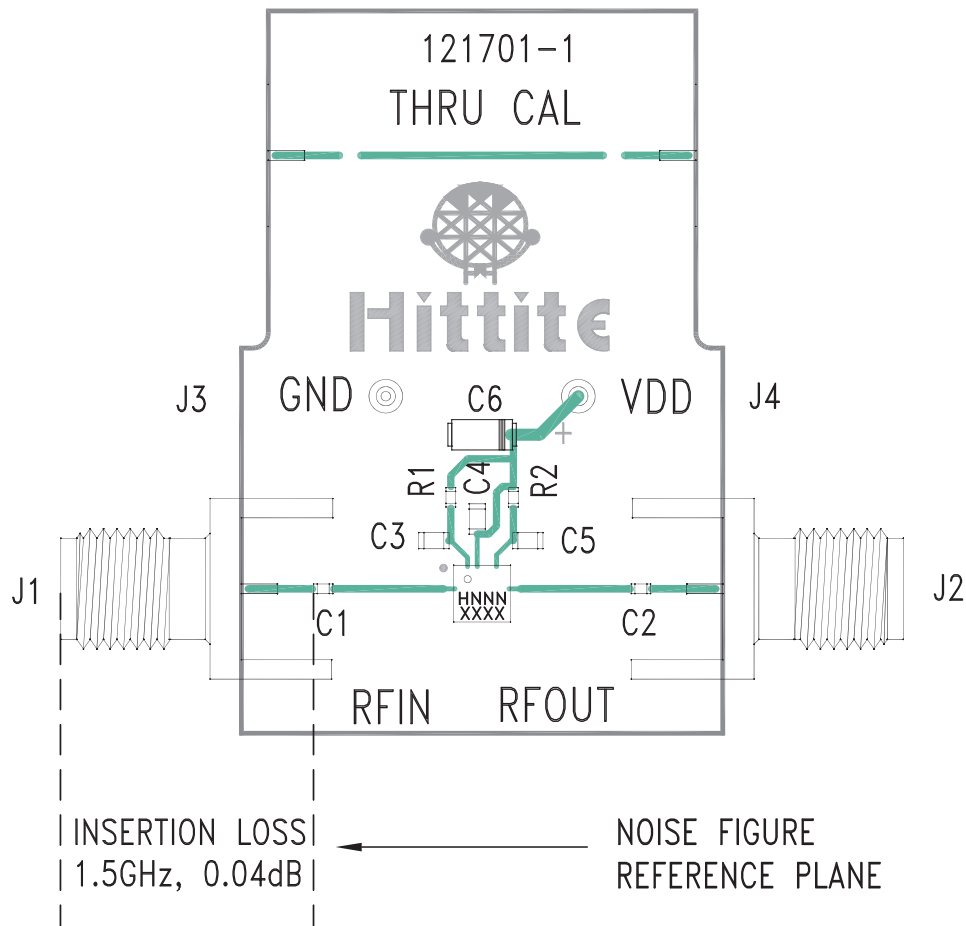

### List of Materials for Evaluation PCB 121703 <sup>[1]</sup>

| Item               | Description                    |
|--------------------|--------------------------------|
| J1, J2             | PCB Mount SMA RF Connector     |
| J3, J4             | DC Pin                         |
| C1                 | 220 pF Capacitor, 0402 Pkg.    |
| C2                 | 10 pF Capacitor, 0402 Pkg.     |
| C3 - C5            | 10 nF Capacitor, 0603 Pkg.     |
| C6                 | 2.2 $\mu$ F Tantalum Capacitor |
| R1                 | 390 Ohm Resistor, 0402 Pkg.    |
| R2                 | 560 Ohm Resistor, 0402 Pkg.    |
| U1                 | HMC758LP3(E) Amplifier         |
| PCB <sup>[2]</sup> | 121701 Evaluation PCB          |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350 or Arlon 25FR.

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct      +86 (21) 6401-6692  
  
Email        amall@ameya360.com  
  
QQ          800077892  
  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel          +86 (21) 64016692-8333  
  
Email        mkt@ameya360.com