




Dimensions mm[inch]

tolerances acc. to DIN ISO 2768-m
Toleranzen gem. DIN ISO 2768-m

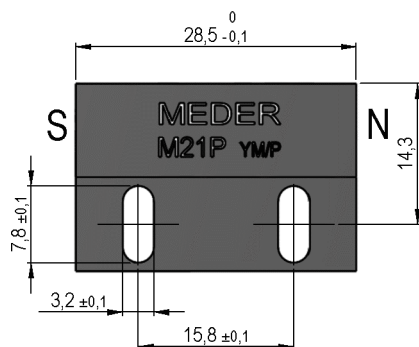

Isometric

Scale 1:1
Maßstab 1:1



Marking

according to EN60062/factory code
gem. EN60062/Fertigungsstätte



Special Product Data	Conditions	Min	Typ	Max	Unit
Sealing compound				Polyurethan	
Housing material				SK655FR1	
Case color				black	

Mag. values DIN IEC 60404-8-	Conditions	Min	Typ	Max	Unit
Magnet Material				Aluminium Nickel Cobalt	
Remanence Br		1.120	1.240		mT
Coercivity HcB		47	51,3		kA/m
Coercivity HcJ		48	51,7		kA/m
Density			7,4		g/cu cm
Max. operating temperature				450	°C
Magnetic moment	measured with MS150	19,8	22,2		E-6 Vs*cm
Magnet Material				Aluminium Nickel Cobalt	

General data	Conditions	Min	Typ	Max	Unit
Remarks					All details according to manufacturers information
Housing Style/Form					MK21 (4005004091)

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com