

# SPECIFICATION:

Contact resistance: 20m ohm max. (initial)

Insulation resistance: 100M ohm min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute

Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating: 12A 125V AC / 250V AC

1/2 HP 125VAC / 1HP 250VAC / 5A 125VAC "L"






Function: (ON) - OFF - (ON) DPDT

KEYWAY  
POSITION

Waterproof rating: IP68

Actuator: Brass / Dull Nickel Plated

( ) = Momentary Function

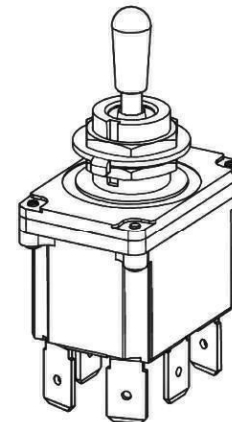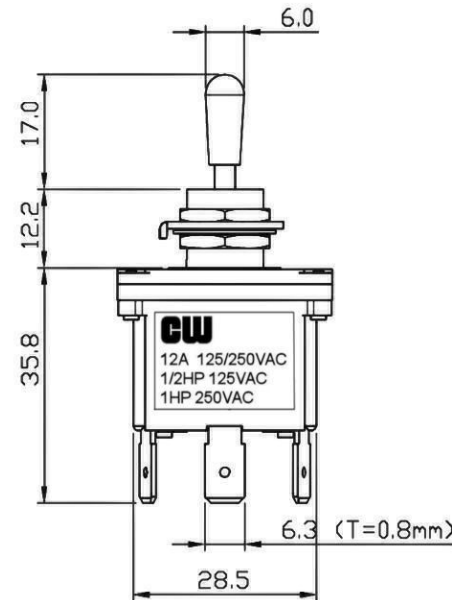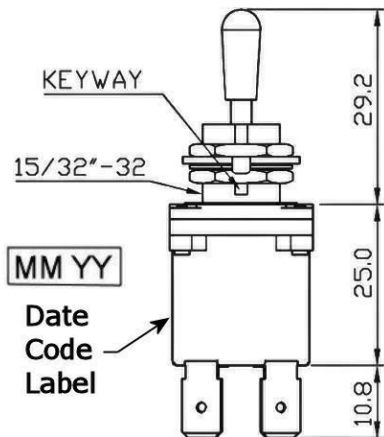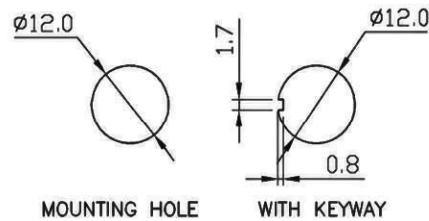

RoHS Compliant

**CW INDUSTRIES**  
Southampton, Pa. 18966  
Tel 215.355.7080/www.cwind.com

Date Drawn: 3-26-12

Rev. 0

Unit: mm

Checked By: *G. Gold*

Title:

**TOGGLE SWITCH**

CW P/N:

**GTB3B17**

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)