



8 button membrane SW to OSD Control Board CN2 Pin Assignment	
pin #	description
10	Common Ground
9	Select Up
8	Select Down
7	Adjust Up/Increase/Right
6	Adjust Down/Decrease/Left
5	Menu
4	Brightness Down
3	Brightness Up
2	ON/OFF
1	Common Ground

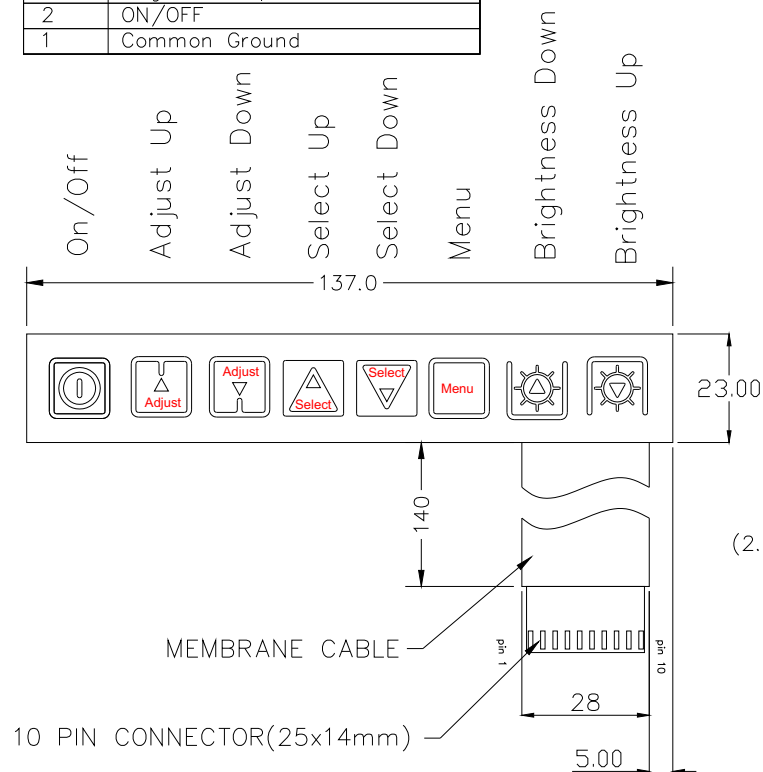

FRONT VIEW


Membrane Switch:
P/N:356301022-3

Membrane interface board
P/N 416100120-3 can operate
under 12VDC/24VDC power input
environment.

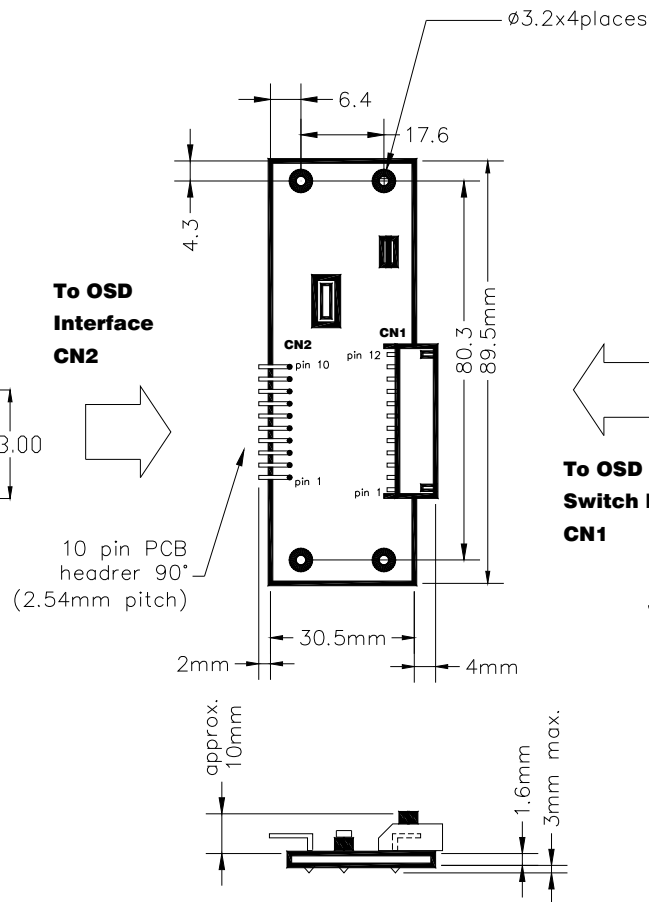

Membrane Interface Board:
P/N:416100120-3

PCB OSD Control Board CN1 Pin Assignment	
pin #	description
12	no connection
11	OSD Select UP
10	OSD Select Down
9	OSD Plus/Right
8	OSD Minus/Left
7	OSD Menu
6	Ground
5	Backlight Brightness
4	Backlight Brightness
3	Backlight Brightness
2	Power Switch B
1	Power Switch A

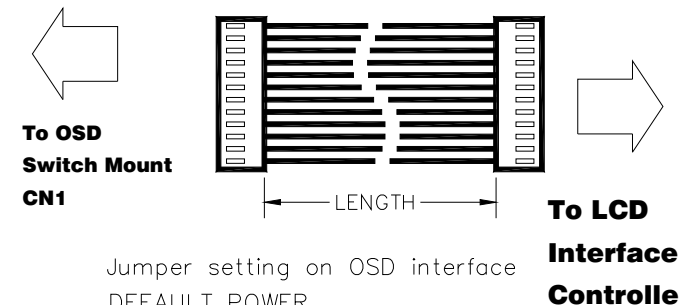

Jumper setting on OSD interface
DEFAULT POWER
JP1 : 1-2 closed – OFF
2-3 closed – ON
BRIGHTNESS INC/DEC SWITCH
JP2 : 1-3 & 2-4 closed – SWAP
1-2 & 3-4 closed – NORMAL

OSD cable:
P/N:426120410-3 (12/12 WAY), 610mm



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com