

## Switchmode/High Frequency Common Mode Inductors

## **CMT908-V3**

## **Description:**

Highly dependable Triad common mode EMI suppression inductors are used in various types of power supplies to eliminate noise common to all lines. These units also provide effective differential mode filtering. Meeting VDE, IEC, UL and CSA requirements, they minimize AC line transmitted interference often created by high frequency switching power supplies.

## **Construction:**

Constructed with UL rated 130°C materials.

# 4 TRICAD 2

## Electrical Specifications (@25C) .1V@10Khz

Min.	Amps	Max. DC (Ω)	Min.
Inductance*	RMS	Resistance	Leakage
8 mH	3.2	.120	90µH


<sup>\*</sup>inductance per winding.

## **Dimensions:**

Α	В	С	D	Е
1.5 Max	.9 Nom	1.45 Max	.6 nom	.8 Max


Note: 1. Pin diameter: 0.036 2. Pin length: 0.092-0.187 3. Units in inches.

**Schematic:** 



RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

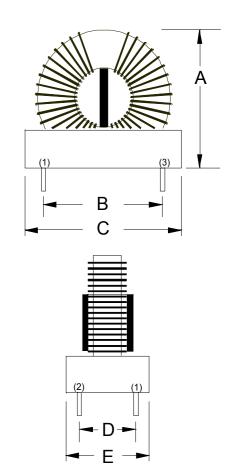

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

22520B Temescal Canyon Road Corona, California 92883

Release Date: September 16, 2005

Revision: A

## AMEYA360 Components Supply Platform

## **Authorized Distribution Brand:**

























## Website:

Welcome to visit www.ameya360.com

## Contact Us:

## > Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

## > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

## Customer Service :

Email service@ameya360.com

## Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com