



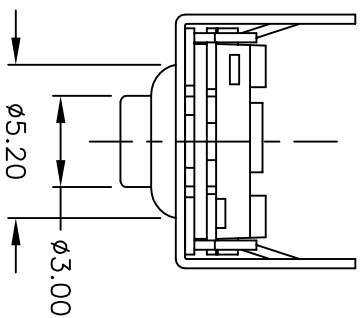



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. ACTUATION FORCE: $130 \pm 40\text{gf}$
5. TRAVEL TO MAKE: $0.3\text{mm} + 0.4/0.0$
6. RATING: 30mA , @12V DC
7. CONTACT RESISTANCE: $50\text{ m}\Omega$ —OHMS (Initial)
8. DIELECTRIC STRENGTH: 300 V RMS min at sea level.
9. ELECTRICAL LIFE CYCLE: $400,000$ make & break cycles at full load.
10. ▲ DESIGNATE MAJOR DIMENSIONS.
11. OPERATING TEMP: -40°C to $+80^\circ\text{C}$
12. 2002/95/EC (ROHS) COMPLIANT

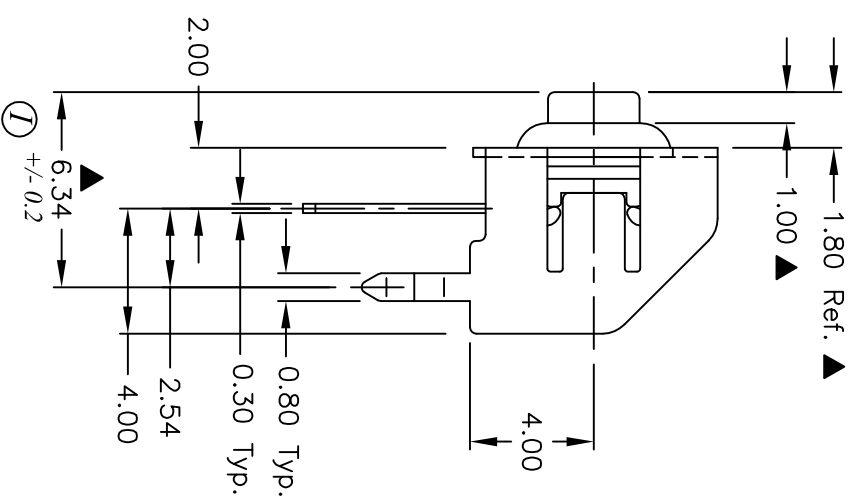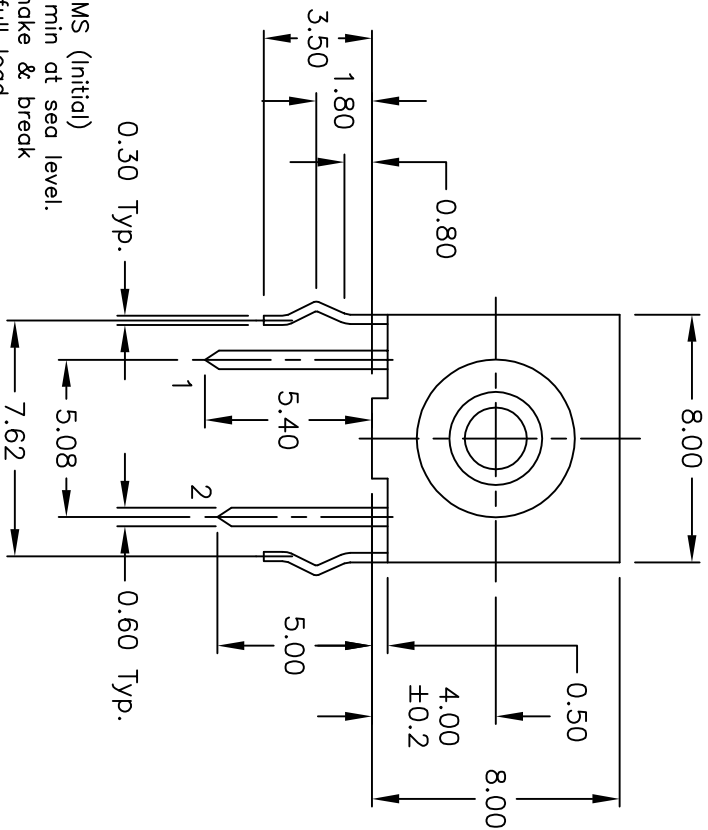

				 E-SWITCH®			
TITLE				GSR 6.34 F130 QP			
SCALE		DATE		DR		REV	
4:1		7/31/08		BLR		I	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com