

5

4

3

2

1

D

D

C


C

B

B

A

A

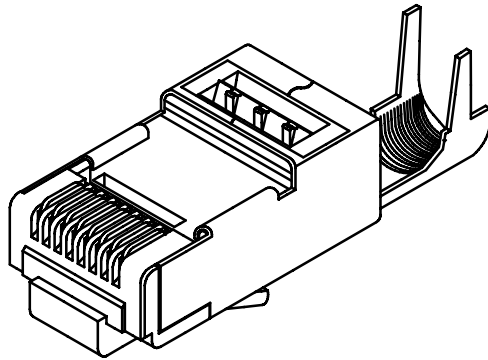

Description: Eight Conductor MOD Plug, Shield

Part No: 32-2298UL

Plug Tolerance and DIM: Complies with F.C.C requirements

Flame and Extinguish: 94-V0

Operation Temperature: -40°C to +85°C

Contact Resistance: 10 Milliohms Max.

Current/Voltage: 30 VAC/42 VDC at 1.5 AMPS





Material: Shield .012THK CDA-260 1/4 HARD BRASS
100-150 MICRO-INCH TIN PLATED

Housing Polycarbonate

Contact Phosphor bronze-.012THK
Gold plated

RoHS Compliance: Yes

Technical Detail: Meets or exceeds Category 5e TIA/EIA 568-B.2

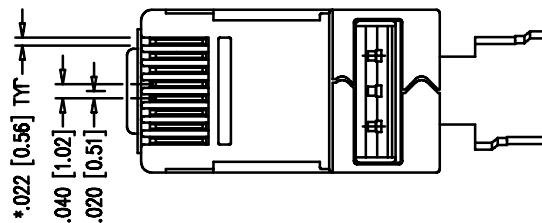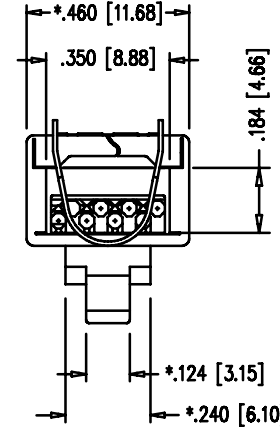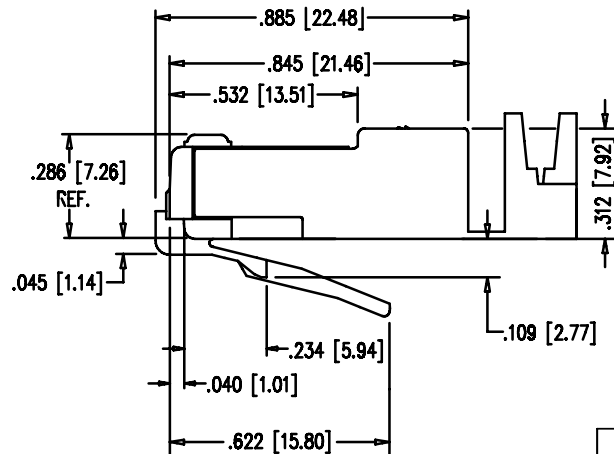

DRAWING NO.

32-2298UL-CUST

REVISIONS

01

OFFICIAL RELEASE

10-13-09

T

W

B

Y

T

02

TYPO MISTAKE: BRESS SHOULD
BE BRASS
UPDATE SPECIFICATIONS

08-14-12

Y

G

Y

G

M

L

ECO-12-0208

CUSTOMER COPY

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS		TERRY.W	03-13-09
X	± 0.5	CHECKED BY	DATE
X.X	± 0.2	BETTY.YU	03-13-09
X.XX	± 0.1	APPROVED BY	DATE
ANGLES	± 0.5°	THOMAS	03-16-09
		U/M	mm

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

 EMERSON Network Power		Connectivity Solutions	
TITLE			
Eight Conductor MOD Plug, Shield			
SHEET	DRAWING NO.	SIZE	
1 OF 1	32-2298UL-CUST	A	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com