#### **Hardware Guide**

Date Modified: April 24, 2012

#### **Mounting Hardware Applications - Table 1**

| Part Number          | Туре              | Mini D<br>Ribbon (MDR)<br>Conn.'s | D Sub<br>Conn.'s | D Ribbon<br>Conn.'s | Shrunk D<br>Ribbon<br>(SDR) Conn.'s | Sheet # | RIA Code          |
|----------------------|-------------------|-----------------------------------|------------------|---------------------|-------------------------------------|---------|-------------------|
| 3341-1L <sup>2</sup> | Jack Socket Screw | ĺ                                 | Х                | Х                   |                                     |         |                   |
| 3341-1S <sup>2</sup> | Jack Socket Screw |                                   | Х                | Х                   |                                     | 2 of 9  | RIA E5 & C3 apply |
| 3341-2               | Jack Socket Screw |                                   |                  | Х                   |                                     |         |                   |
| 3341-3               | Jack Socket Screw |                                   |                  | Х                   |                                     |         |                   |
| 3341-42              | Jack Socket Screw |                                   | Х                | Х                   |                                     |         |                   |
| 3341-10              | Jack Socket Screw | Х                                 |                  |                     |                                     |         |                   |
| 3341-13              | Jack Socket Screw | Х                                 |                  |                     |                                     |         |                   |
| 3341-16              | Jack Socket Screw | Х                                 |                  |                     |                                     | 3 of 9  |                   |
| 3341-17              | Jack Socket Screw | X                                 |                  |                     |                                     |         |                   |
| 3341-25              | Jack Socket Screw | Х                                 |                  |                     |                                     |         |                   |
| 3341-30              | Jack Socket Screw | Х                                 |                  |                     |                                     |         |                   |
| 3341-31              | Jack Socket Screw | X                                 |                  |                     |                                     | 4 of 9  |                   |
| 3341-32              | Jack Socket Screw | Х                                 |                  |                     |                                     |         |                   |
| 3341-35              | Jack Socket Screw | Х                                 |                  |                     |                                     |         |                   |
| 3341-36              | Jack Socket Screw | Х                                 |                  |                     |                                     |         |                   |
| 3342-1 <sup>2</sup>  | Jack Screw Kits   |                                   | Х                |                     |                                     | 5 of 9  |                   |
| 3342-2 <sup>2</sup>  | Jack Screw Kits   |                                   | Х                |                     |                                     |         |                   |
| 3342-3 <sup>2</sup>  | Jack Screw Kits   |                                   | Х                | Х                   |                                     |         |                   |
| 3342-4 <sup>2</sup>  | Jack Screw Kits   |                                   | Х                | Х                   |                                     |         |                   |
| 3344-3               | Board Lock Screw  | Х                                 |                  |                     |                                     |         | ]                 |
| 3344-4               | Board Lock Screw  | Х                                 |                  |                     |                                     |         |                   |
| 3344-26              | Panel Mount Screw | Х                                 |                  |                     |                                     |         |                   |
| 3344-38              | Panel Mount Screw | Х                                 |                  |                     |                                     | 6 of 9  |                   |
| 3344-44              | Panel Mount Screw | Х                                 |                  |                     |                                     |         |                   |
| 3344-45              | Panel Mount Screw | Х                                 |                  |                     |                                     |         |                   |
| 3475-1               | Bail Mount Kits   |                                   |                  | Х                   |                                     |         | 1                 |
| 3475-4               | Bail Mount Kits   |                                   |                  | Х                   |                                     | 7 of 9  |                   |
| 3475-5               | Bail Mount Kits   | ĺ                                 |                  | Х                   |                                     |         |                   |
| 12600-S-08           | Jack Socket Screw |                                   |                  |                     | Х                                   |         | 1                 |
| 12600-S-10           | Jack Socket Screw |                                   |                  |                     | Х                                   | 8 of 9  |                   |
| 12600-S-12           | Jack Socket Screw |                                   |                  |                     | Х                                   |         |                   |
| 3344-46              | Board Lock Screw  |                                   |                  |                     | Х                                   |         |                   |
| Mounting h           | nardware Guide    |                                   | Х                |                     |                                     | 9 of 9  | 1                 |

#### -See sneet 7 of 9 for D Ribbon & Plastic Connector accessories

#### Notes

- $1. \quad \text{Use Table 1 as a guide for selecting the correct mounting hardware}.$
- 2. See sheet 9 of 9 for selection guide 9 to 37 and 50 position D Sub connectors.
- 3. See Regulatory Information Appendix (RIA) for chemical compliance information.

TS-0142-J Sheet 1 of 9

#### **Jack Socket Screws**

3M Part Number 3341-1L

Kit Contents:

2 - Jack Sockets

4 - Spacers .031 [0.79] Thick

2 - Lock Washers


2 - 4-40 Nuts


Material: Steel

Finish: Zinc with Clear Chromate

Screw / Socket Thread Size: #4-40 / #4-40

Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]





3M Part Number

Kit Contents:

3341-1S 2 - Jack Sockets


8 - Spacers .031 [0.79] Thick 2 - Lock Washers


2 - 4-40 Nuts Material: Steel

Finish: Zinc with Clear Chromate

Screw / Socket Thread Size: #4-40 / #4-40

Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]





3M Part Number

Kit Contents:

2 - Jack Sockets 2 - Lock Washers


2 - 4-40 Nuts

Material: Steel

Finish: Zinc with Clear Chromate


Screw / Socket Thread Size: #4-40 / #4-40

Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]



[7.6]

#4-40 Thread



3M Part Number 3341-3

Kit Contents: 2 - Jack Sockets


4 - Spacers .031 [0.79] Thick IEEE-488-Type


2 - Lock Washers

2 - 4-40 Nuts

Material: Steel Finish: Black Oxide

Screw / Socket Thread Size: #4-40 / M3.5 Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]





3M Part Number

Kit Contents:

3341-4 2 - Jack Sockets

4 - Spacers .031 [0.79] Thick 2 - Lock Washers


2 - 4-40 Nuts


Material: Steel

Finish: Zinc with Clear Chromate


Screw / Socket Thread Size: #4-40 /#4-40


Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]





TS-0142-J Sheet 2 of 9

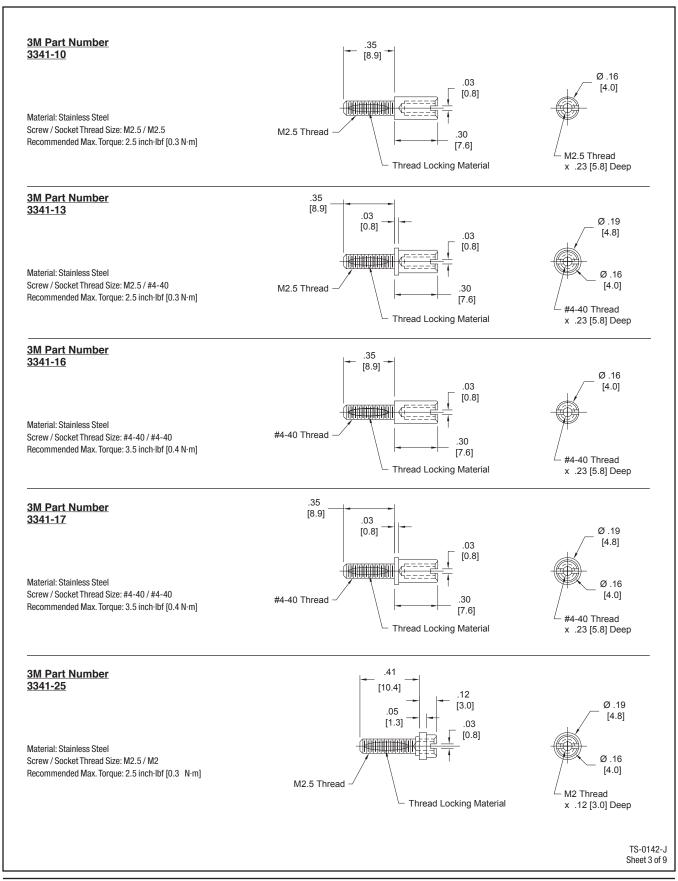

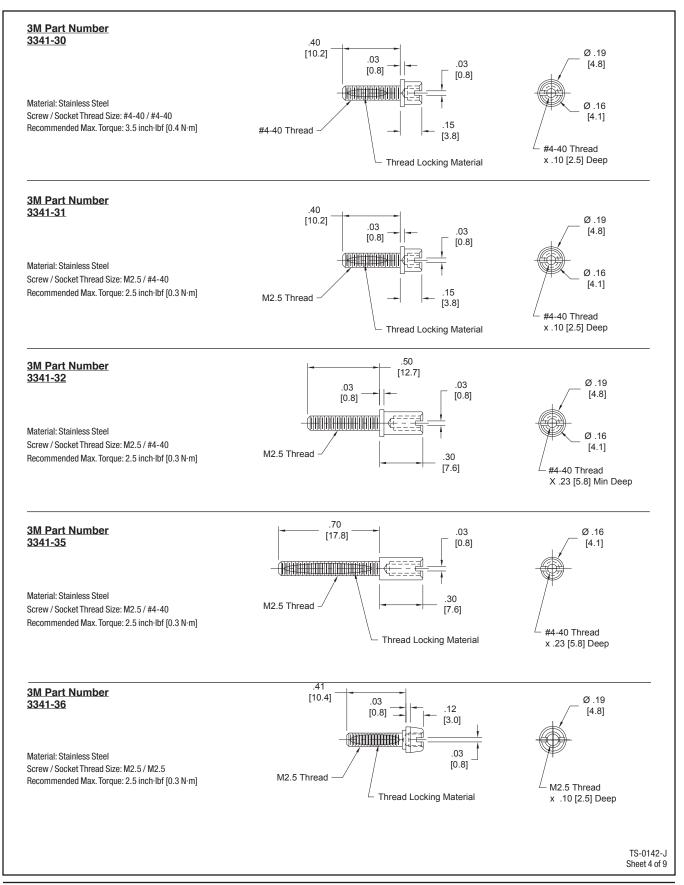

#### **Jack Screw Kits**

#### 3M Part Number

<u>3342-1</u>

Kit Contents:


2 - Clips 2 - Jack Screws


Material: Steel

Finish: Zinc with Clear Chromate

Thread size: #4-40

Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]





#### 3M Part Number

3342-2

Kit Contents:

2 - Spacers

2 - Jack Screws

Material: Steel


Finish: Zinc with Clear Chromate

Thread size: #4-40

Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]



Spacer



#### 3M Part Number <u>3342-3</u>

Kit Contents: 2 - Screws


2 - Jack Screws


Material: Steel

Finish: Zinc with Clear Chromate

Thread size: #4-40

Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]






#### 3M Part Number 3342-4

Material: Steel

Finish: Zinc with Clear Chromate


Thread size: #4-40

Recommended Max. Torque: 7.0 inch·lbf [0.8 N·m]



TS-0142-J Sheet 5 of 9

#### **Board Lock Screws** Use to attach connector to printed circuit board. Not for use for panel mounting. .24 NOM. 3M Part Number [6.0]Ø .20 MAX 3344-3 [5.0] Material: Steel Finish: Nickel Plated Thread size: M2.5 .079 MAX Recommended Max. Torque: 2.5 inch·lbf [0.3 N·m] [2.00] M2.5 Thread 3M Part Number .25 NOM [6.4] 3344-4 Ø .18 MAX [4.5] Material: Steel Finish: Nickel Plated Thread size: #4-40 Recommended Max. Torque: 3.5 inch·lbf [0.4 N·m] .075 MAX [1.91] #4-40 Thread **Panel Mount Screws** Use to attach connector to panel or chassis. Not for use for PCB mounting. .31 NOM. 3344-26 [8.0] Ø .18 MAX [4.5] Material: Steel Finish: Zinc Thread size: M2.6 Recommended Max. Torque: 2.5 inch·lbf [0.3 N·m] .071 MAX [1.80] M2.6 Thread 3M Part Number .31 NOM 3344-38 [8.0] Ø .18 MAX [4.5]Material: Steel Finish: Zinc Thread size: M2.5 Recommended Max. Torque: 2.5 inch·lbf [0.3 N·m] .071 MAX M2.5 Thread [1.80] 3M Part Number 3344-44 .375 NOM. Ø .18 MAX [9.52] [4.5] Material: Steel Finish: Zinc Thread size: #4-40 Recommended Max. Torque: 3.5 inch·lbf [0.4 N·m] .075 MAX #4-40 Thread [1.91] 3M Part Number .31 NOM. 3344-45 [8.0] Ø .18 MAX [4.5]Material: Stainless Steel Thread size: M2.5 Recommended Max. Torque: 2.5 inch·lbf [0.3 N·m] 071 MAX M2.5 Thread [1.80] TS-0142-J Sheet 6 of 9

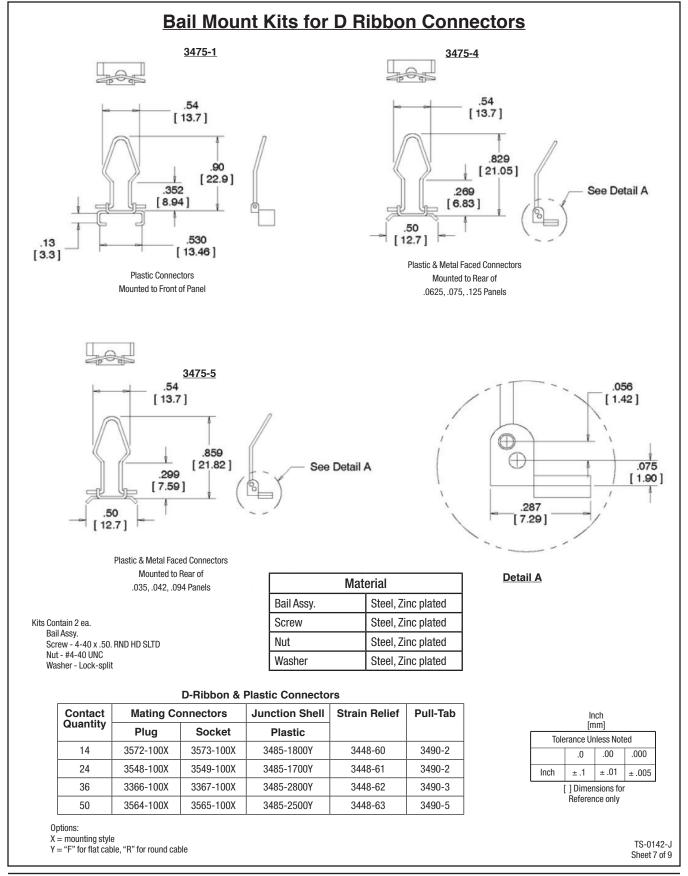


#### **Jack Socket Screws**


Use to attach connector to panel or chassis. Not for use for PC board mounting.

#### 3M Part Number 12600-S-08

For .03" [0.8 mm] Panel Thickness

Material: Steel Finish: Nickel Plated Screw / Socket Thread Size: M2 / M2 Recommended Max. Torque: 2.5 inch·lbf [0.3 N·m]







#### 3M Part Number 12600-S-10

For .04" [1.0 mm] Panel Thickness

Material: Steel Finish: Nickel Plated Screw / Socket Thread Size: M2 / M2 Recommended Max. Torque: 2.5 inch-lbf [0.3 N-m]







#### 3M Part Number 12600-S-12

For .05" [1.2 mm] Panel Thickness

Material: Steel
Finish: Nickel Plated
Screw / Socket Thread Size: M2 / M2
Recommended Max. Torque: 2.5 inch-lbf [0.3 N-m]






#### **Board Lock Screw**

Use to attach connector to printed circuit board. Not for use for panel mounting.

#### 3M Part Number 3344-46

Material: Stainless Steel Thread size: M2

Recommended Max. Torque: 2.5 inch·lbf [0.3 N·m]





TS-0142-J Sheet 8 of 9

#### **D Sub Connectors**

#### **Mounting Hardware Guide**

#### Selection Guide - 9 to 37 Position D Sub Connectors

- 1. To mount a connector to a panel, select the correct Jack Socket Kit from table 1.
- 2. To secure a mating connector to a panel mounted connector, select the correct Jack Screw Kit from table 2.
- 3. To secure two connectors together in a mid-span application where no panel exists, select both the Jack Socket Kit and Jack Screw Kit from table 2.

| Panel Mounted Connectors Jack Socket Kits |         |         |            |         |  |  |  |  |
|---|---------|---------|------------|---------|--|--|--|--|
| Panel                                     | Front I | Mount   | Rear Mount |         |  |  |  |  |
| Thickness                                 | Kit     | Spacers | Kit        | Spacers |  |  |  |  |
| 1/16                                      | 3341-1L | 2       | 3341-1L    | 0       |  |  |  |  |
| 3/32                                      | 3341-1L | 2       | 3341-1S    | 1       |  |  |  |  |
| 1/8                                       | 3341-4  | 2       | 3341-1S    | 0       |  |  |  |  |

Note: Spacers Placed Under Head of Jack Sockets

| Junction  | Connectors with Junction Shells |         |                 |  |  |  |  |
|-----------|---------------------------------|---------|-----------------|--|--|--|--|
| Shell     | Jack Screw Kit                  | Spacers | Jack Socket Kit |  |  |  |  |
|           | 3342-1                          |         | 3341-1L         |  |  |  |  |
| 3485-2X00 | 3342-2                          | 2       | 3341-4          |  |  |  |  |
| 3357-41XX | 3342-2                          | 2       | 3341-4          |  |  |  |  |
| 3357-51XX | 3342-2                          | 2       | 3341-4          |  |  |  |  |
| 3357-65XX | 3342-x Supplied                 |         | 3341-4          |  |  |  |  |
| 3357-92XX | 3342-x Supplied                 | 3341-1L |                 |  |  |  |  |

#### Notes:

- 1. Jack Sockets used for MidSpan Applications.
- 2. Spacers Placed Under Head of Jack Screws.

#### Selection Guide - 50 Position D Sub Connectors See TS-0034 Socket and TS-0035 Plug.

Mounting Options Using 3357-9250 Junction Shell & 3505-62 Latch Bracket. See TS-0245.

Front Panel Mounted Connectors:

Connectors not designed for this application

Rear Panel Mounted Connectors:

1/16" Panel:1 Spacer Latch Bracket and Panel

3/32" Panel:No Spacers.

>3/32" Panel:Latch Bracket not designed for these applications.

Mid-Span Applications: Mount Latch Bracket directly to either the Plug or Socket Connector.

TS-0142-J Sheet 9 of 9

# Important Notice All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M. Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.



**3M Electronics Solutions Division** 

6801 River Place Blvd. Austin, TX 78726-9000 U.S.A. 1-800-225-5373 www.3Mconnectors.com

# AMEYA360 Components Supply Platform

#### **Authorized Distribution Brand:**

























#### Website:

Welcome to visit www.ameya360.com

#### Contact Us:

#### > Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

#### > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

#### Customer Service :

Email service@ameya360.com

### Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com