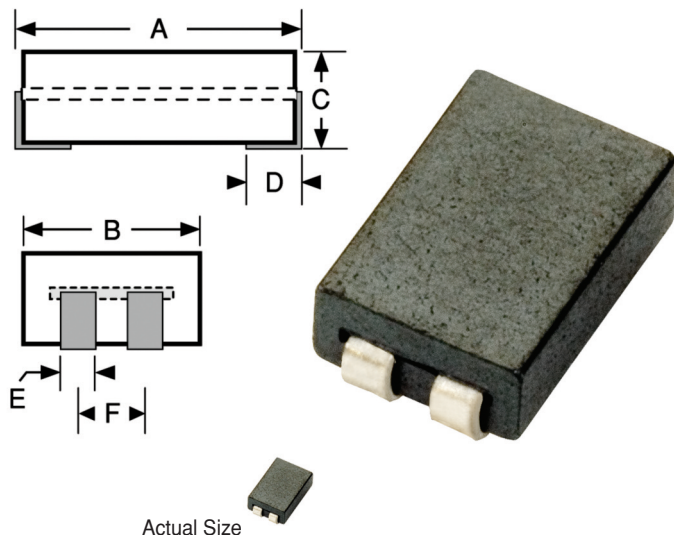



SERIES**4222R**
4222**Surface Mount Common Mode Bead**

Actual Size

Mechanical Configuration Ferrite bead with plated copper wire. Provides a common path for the magnetic flux generated by the current to and from the load. The resulting effect is zero magnetic flux in the core.

Physical Parameters

	Inches	Millimeters
A	0.335 ± 0.031	8.51 ± 0.79
B	0.220 ± 0.010	5.6 ± 0.25
C	0.112 ± 0.010	2.85 ± 0.25
D	0.050 ± 0.010	1.27 ± 0.25
E	0.045 ± 0.005	1.10 ± 0.122
F (Ref.)	0.10	2.54
V (Ref.)	0.177	4.5
W (Ref.)	0.295	7.5
X (Ref.)	0.071	1.8
Y (Ref.)	0.118	3.0
Z (Ref.)	0.100	2.54

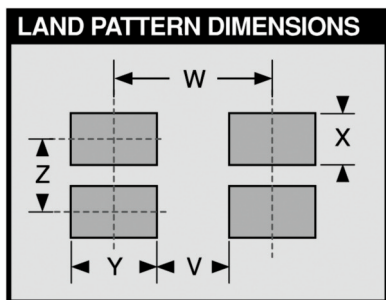Packaging Bulk only

Performance Withstands a breakdown voltage of 500 VDC

DCR 0.010 Ohms Max.


Current Rating at 90°C Ambient

35°C Rise, 5 Amps max.

Impedances are measured on the HP4191A Impedance Analyzer

Impedance vs. Frequency (Typical)

@ MHz	Ohms
1	6.0
10	26.
25	38.
50	45.
100	54.
300	80.

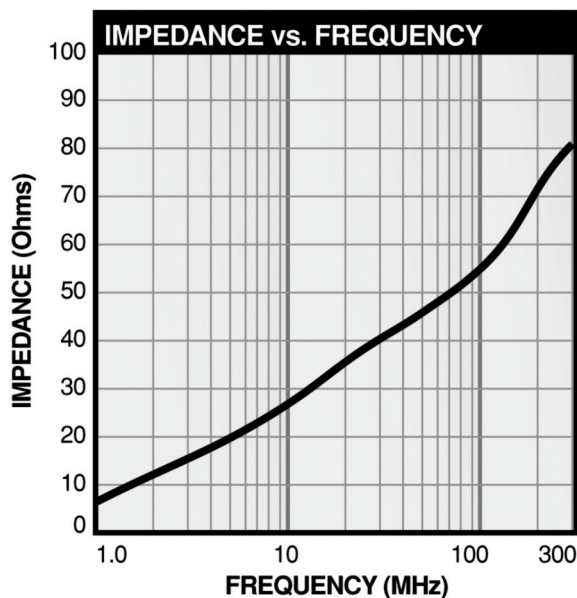

For more detailed graphs, contact factory

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com