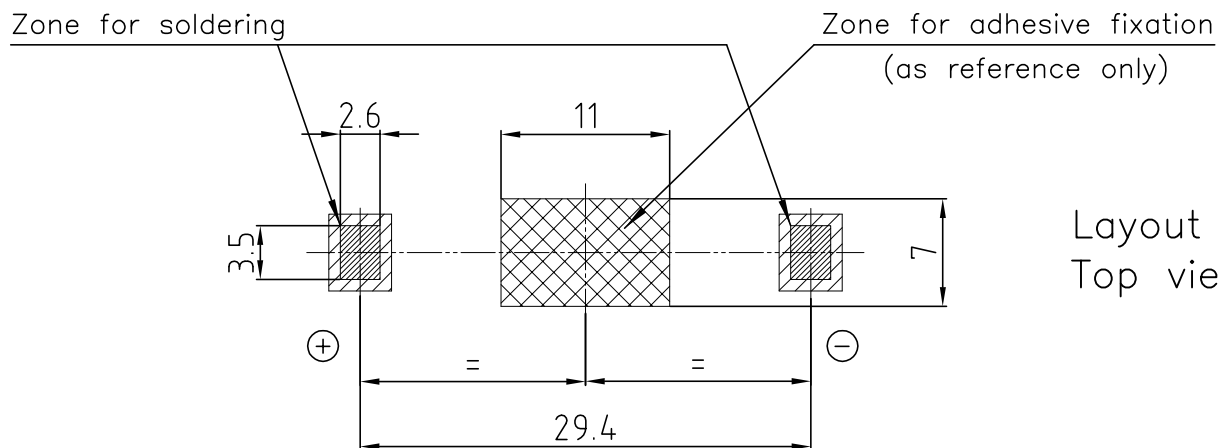
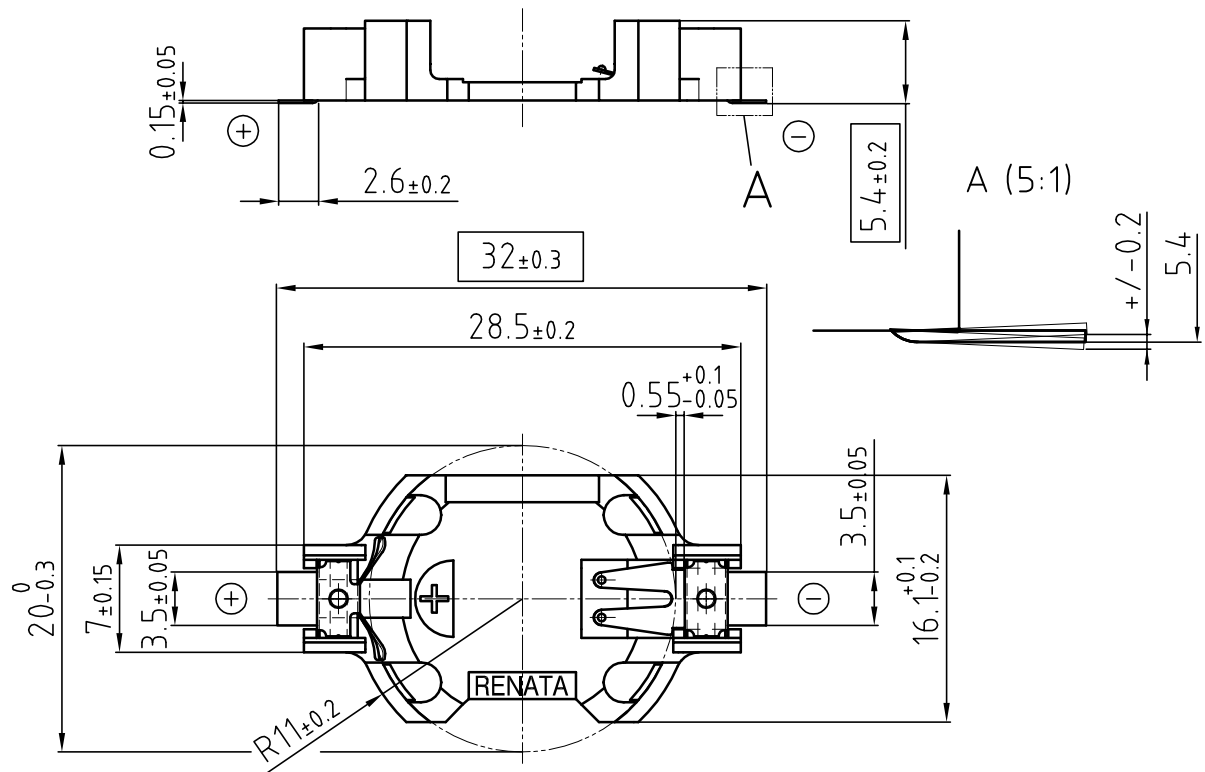


Layout
Top view

- Samples can deviate in the execution from the serie.

Holder material : heat resistant, glass-fiber reinforced LCP

Battery contacts : spring stainless steel 301 nickel plated throughout

Solder contacts : spring stainless steel 301 solder area tin-plated throughout, min. thickness 5µm

All framed values will be used for dimension checking !

- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

Rev. ①	06.08.07	SRi	Rev. ④	24.10.07	SRi		Customer's Approval		
Rev. ②	07.09.07	MCI	Rev. ⑤	15.09.10	Wu Ping		Date		
Rev. ③	26.09.07	SRi	Rev. ○				Signature		
Titel: SMTU2032-LF						Scale 2:1	Drawn	25.01.05	SRi
							Checked	16.09.10	SRi
							Approved		
renata batteries						CH-4452 Itingen Switzerland			
						3.8760.4-5			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com