

### Features

- Operating range from  $V_{CC} = 1.8$  to 6 V
- Rail-to-rail input and output
- Extended  $V_{icm}$  ( $V_{CC-} - 0.2$  V to  $V_{CC+} + 0.2$  V)
- Low supply current (400  $\mu$ A)
- Gain bandwidth product (1.6 MHz)
- High unity gain stability
- ESD tolerance (2 kV)
- Latch-up immunity
- Available in
  - SOT23-5 micropackage
  - MiniSO-8, SO-8, SO-14
  - TSSOP8, TSSOP14 package

### Applications


- Battery powered applications (toys)
- Portable communication devices (cell phones)
- Audio drivers (headphone drivers)
- Laptop/notebook computers

### Description

The TS187x (single, dual and quad) device can operate with voltages as low as 1.8 V. They feature both input and output rail-to-rail.

The common mode input voltage extends 200 mV beyond the supply voltages at 25 °C, while the output voltage swing is within 100 mV of each rail with a 600  $\Omega$  load resistor. The devices consume typically 400  $\mu$ A per channel while offering 1.6 MHz of gain bandwidth product. The amplifiers provide a high output drive capability at typically 65 mA loads.

These features make the TS187x family ideal for sensor interface, battery supplied and portable applications.

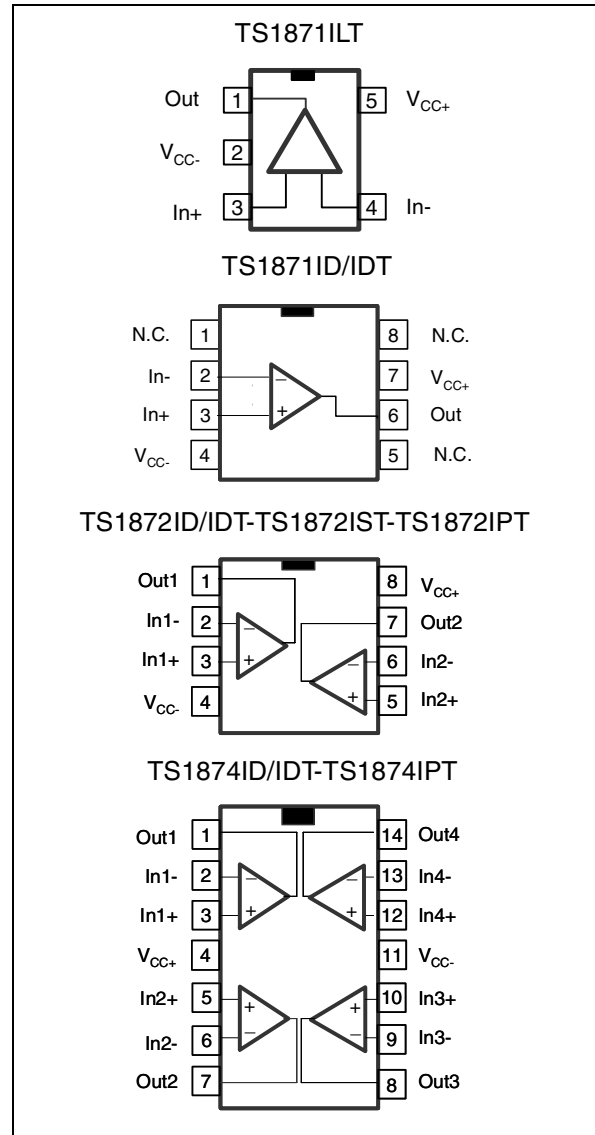

**Table 1. Device summary**

| Reference | Single version | Dual version | Quad version |
|-----------|----------------|--------------|--------------|
| TS187x    | TS1871         | TS1872       | TS1874       |
| TS187xA   | TS1871A        | TS1872A      | TS1874A      |

# Contents

|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| <b>1</b> | <b>Absolute maximum ratings and operating conditions</b> | <b>3</b>  |
| <b>2</b> | <b>Electrical characteristics</b>                        | <b>5</b>  |
| <b>3</b> | <b>Package information</b>                               | <b>16</b> |
| 3.1      | SO-8 package information                                 | 17        |
| 3.2      | TSSOP8 package information                               | 18        |
| 3.3      | MiniSO-8 package information                             | 19        |
| 3.4      | SO-14 package information                                | 20        |
| 3.5      | TSSOP14 package information                              | 21        |
| 3.6      | SOT23-5 package information                              | 22        |
| <b>4</b> | <b>Ordering information</b>                              | <b>23</b> |
| <b>5</b> | <b>Revision history</b>                                  | <b>24</b> |

# 1 Absolute maximum ratings and operating conditions

**Table 2. Absolute maximum ratings**

| Symbol     | Parameter                                             | Value                            | Unit |
|------------|-------------------------------------------------------|----------------------------------|------|
| $V_{CC}$   | Supply voltage <sup>(1)</sup>                         | 7                                | V    |
| $V_{id}$   | Differential input voltage <sup>(2)</sup>             | $\pm 1$                          | V    |
| $V_{in}$   | Input voltage                                         | $V_{CC} - 0.3$ to $V_{CC} + 0.3$ | V    |
| $T_{stg}$  | Storage temperature                                   | -65 to +150                      | °C   |
| $T_j$      | Maximum junction temperature                          | 150                              | °C   |
| $R_{thja}$ | Thermal resistance junction-to-ambient <sup>(3)</sup> |                                  | °C/W |
|            | SOT23-5                                               | 250                              |      |
|            | MiniSO-8                                              | 190                              |      |
|            | SO-8                                                  | 125                              |      |
|            | SO-14                                                 | 103                              |      |
|            | TSSOP8                                                | 120                              |      |
|            | TSSOP14                                               | 100                              |      |
| $R_{thjc}$ | Thermal resistance junction-to-case                   |                                  | °C/W |
|            | SOT23-5                                               | 81                               |      |
|            | MiniSO-8                                              | 39                               |      |
|            | SO-8                                                  | 40                               |      |
|            | SO-14                                                 | 31                               |      |
|            | TSSOP8                                                | 37                               |      |
|            | TSSOP14                                               | 32                               |      |
| ESD        | HBM: human body model <sup>(4)</sup>                  | 2                                | kV   |
|            | MM: machine model <sup>(5)</sup>                      | 200                              | V    |
|            | CDM: charged device model <sup>(6)</sup>              | 1.5                              | kV   |
|            | Latch-up immunity                                     | 200                              | mA   |
|            | Lead temperature (soldering, 10 sec.)                 | 250                              | °C   |
|            | Output short-circuit duration                         | See <sup>(7)</sup>               |      |

1. All voltage values, except differential voltage, are with respect to network terminal.
2. Differential voltages are the non-inverting input terminal with respect to the inverting input terminal. If  $V_{id} > \pm 1$  V, the maximum input current must not exceed  $\pm 1$  mA. When  $V_{id} > \pm 1$  V, add an input series resistor to limit the input current.
3. Short-circuits can cause excessive heating. Destructive dissipation can result from simultaneous short-circuits on all amplifiers.
4. Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 k $\Omega$  resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.
5. Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5  $\Omega$ ). This is done for all couples of connected pin combinations while the other pins are floating.
6. Charged device model: all pins and package are charged together to the specified voltage and then discharged directly to ground through only one pin. This is done for all pins.
7. Short-circuits from the output to  $V_{CC}$  can cause excessive heating. The maximum output current is approximately 80 mA, independent of the magnitude of  $V_{CC}$ . Destructive dissipation can result from simultaneous short-circuits on all amplifiers.

**Table 3. Operating conditions**

| Symbol     | Parameter                                                                                                                                                                            | Value                                                        | Unit               |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------|
| $V_{CC}$   | Supply voltage                                                                                                                                                                       | 1.8 to 6                                                     | V                  |
| $V_{icm}$  | Common-mode input voltage range<br>$T_{oper} = 25\text{ }^{\circ}\text{C}$ , $1.8 \leq V_{CC} \leq 6\text{ V}$<br>$T_{min} < T_{oper} < T_{max}$ , $1.8 \leq V_{CC} \leq 6\text{ V}$ | $V_{CC-} - 0.2$ to $V_{CC+} + 0.2$<br>$V_{CC-}$ to $V_{CC+}$ | V                  |
| $T_{oper}$ | Operating free air temperature range                                                                                                                                                 | -40 to + 125                                                 | $^{\circ}\text{C}$ |

## 2 Electrical characteristics

**Table 4. Electrical characteristics measured at  $V_{CC+} = +1.8\text{ V}$  with  $V_{CC-} = 0\text{ V}$ ,  $C_L$  and  $R_L$  connected to  $V_{CC}/2$ , and  $T_{\text{amb}} = 25\text{ °C}$  (unless otherwise specified)<sup>(1)</sup>**

| Symbol          | Parameter                                                              | Conditions                                                                                                                                                                                                              | Min.                         | Typ.         | Max.                     | Unit                         |
|-----------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------|--------------------------|------------------------------|
| $V_{io}$        | Input offset voltage                                                   | $V_{icm} = V_{out} = V_{CC}/2$<br>TS1871A/2A/4A<br>$T_{min} \leq T_{amb} \leq T_{max}$<br>TS1871/2/4<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                             |                              | 0.1          | 1<br>1.5<br>3<br>6       | mV                           |
| $\Delta V_{io}$ | Input offset voltage drift                                             |                                                                                                                                                                                                                         |                              | 2            |                          | $\mu\text{V}/^\circ\text{C}$ |
| $I_{io}$        | Input offset current                                                   | $V_{icm} = V_{out} = V_{CC}/2^{(2)}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                             |                              | 3            | 30<br>60                 | nA                           |
| $I_{ib}$        | Input bias current                                                     | $V_{icm} = V_{out} = V_{CC}/2^{(2)}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                             |                              | 40           | 125<br>150               | nA                           |
| CMR             | Common mode rejection ratio<br>$20 \log (\Delta V_{ic}/\Delta V_{io})$ | $0 \leq V_{icm} \leq V_{CC}$ , $V_{out} = V_{CC}/2$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                              | 55<br>52                     | 77           |                          | dB                           |
| $A_{vd}$        | Large signal voltage gain                                              | $V_{out} = 0.5 \text{ to } 1.3\text{ V}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$                                                                                                                       | 77<br>70                     | 91<br>84     |                          | dB                           |
| $V_{OH}$        | High level output voltage                                              | $V_{id} = 100\text{ mV}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 2\text{ k}\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 600\text{ }\Omega$  | 1.65<br>1.62<br>1.65<br>1.62 | 1.77<br>1.74 |                          | V                            |
| $V_{OL}$        | Low level output voltage                                               | $V_{id} = -100\text{ mV}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 2\text{ k}\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 600\text{ }\Omega$ |                              | 30<br>46     | 100<br>150<br>100<br>150 | mV                           |
| $I_o$           | Output source current                                                  | $V_{id} = 100\text{ mV}$ , $V_O = V_{CC-}$                                                                                                                                                                              | 20                           | 58           |                          | mA                           |
|                 | Output sink current                                                    | $V_{id} = -100\text{ mV}$ , $V_O = V_{CC+}$                                                                                                                                                                             | 20                           | 68           |                          |                              |
| $I_{CC}$        | Supply current (per amplifier)                                         | $V_{out} = V_{CC}/2$<br>$A_{VCL} = 1$ , no load<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                  |                              | 400          | 560<br>600               | $\mu\text{A}$                |
| GBP             | Gain bandwidth product                                                 | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $f = 100\text{ kHz}$                                                                                                                                                | 0.9                          | 1.6          |                          | MHz                          |
| SR              | Slew rate                                                              | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $A_V = 1$                                                                                                                                                           | 0.38                         | 0.54         |                          | V/ $\mu\text{s}$             |
| $\phi_m$        | Phase margin                                                           | $C_L = 100\text{ pF}$                                                                                                                                                                                                   |                              | 53           |                          | Degrees                      |
| $e_n$           | Input voltage noise                                                    | $f = 1\text{ kHz}$                                                                                                                                                                                                      |                              | 27           |                          | nV/ $\sqrt{\text{Hz}}$       |
| THD             | Total harmonic distortion                                              |                                                                                                                                                                                                                         |                              | 0.01         |                          | %                            |

1. All parameter limits at temperatures different from 25 °C are guaranteed by correlation.

2. Maximum values include unavoidable inaccuracies of the industrial tests.

**Table 5. Electrical characteristics measured at  $V_{CC} = +3\text{ V}$  with  $V_{CC-} = 0\text{ V}$ ,  $C_L$  and  $R_L$  connected to  $V_{CC}/2$ , and  $T_{amb} = 25\text{ °C}$  (unless otherwise specified)<sup>(1)</sup>**

| Symbol          | Parameter                                                              | Conditions                                                                                                                                                                                                              | Min.                         | Typ.         | Max.                     | Unit                         |
|-----------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------|--------------------------|------------------------------|
| $V_{io}$        | Input offset voltage                                                   | $V_{icm} = V_{out} = V_{CC}/2$<br>TS1871A/2A/4A<br>$T_{min} \leq T_{amb} \leq T_{max}$<br>TS1871/2/4<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                             |                              | 0.1          | 1<br>1.5<br>3<br>6       | mV                           |
| $\Delta V_{io}$ | Input offset voltage drift                                             |                                                                                                                                                                                                                         |                              | 2            |                          | $\mu\text{V}/^\circ\text{C}$ |
| $I_{io}$        | Input offset current                                                   | $V_{icm} = V_{out} = V_{CC}/2^{(2)}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                             |                              | 3            | 30<br>60                 | nA                           |
| $I_{ib}$        | Input bias current                                                     | $V_{icm} = V_{out} = V_{CC}/2^{(2)}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                             |                              | 4            | 125<br>150               | nA                           |
| CMR             | Common mode rejection ratio<br>$20 \log (\Delta V_{io}/\Delta V_{ic})$ | $0 \leq V_{icm} \leq V_{CC}$ , $V_{out} = V_{CC}/2$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                              | 60<br>57                     | 80           |                          | dB                           |
| $A_{vd}$        | Large signal voltage gain                                              | $V_{out} = 0.5\text{ to }2.5\text{ V}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$                                                                                                                         | 80<br>74                     | 94<br>88     |                          | dB                           |
| $V_{OH}$        | High level output voltage                                              | $V_{id} = 100\text{ mV}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 2\text{ k}\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 600\text{ }\Omega$  | 2.82<br>2.80<br>2.82<br>2.80 | 2.95<br>2.95 |                          | V                            |
| $V_{OL}$        | Low level output voltage                                               | $V_{id} = -100\text{ mV}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 2\text{ k}\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 600\text{ }\Omega$ |                              | 39<br>58     | 120<br>160<br>120<br>160 | mV                           |
| $I_o$           | Output source current                                                  | $V_{id} = 100\text{ mV}$ , $V_O = V_{CC-}$                                                                                                                                                                              | 20                           | 60           |                          | mA                           |
|                 | Output sink current                                                    | $V_{id} = -100\text{ mV}$ , $V_O = V_{CC+}$                                                                                                                                                                             | 20                           | 70           |                          |                              |
| $I_{CC}$        | Supply current (per amplifier)                                         | $V_{out} = V_{CC}/2$<br>$A_{VCL} = 1$ , no load<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                  |                              | 450          | 650<br>690               | $\mu\text{A}$                |
| GBP             | Gain bandwidth product                                                 | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $f = 100\text{ kHz}$                                                                                                                                                | 1                            | 1.7          |                          | MHz                          |
| SR              | Slew rate                                                              | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $A_V = 1$                                                                                                                                                           | 0.42                         | 0.6          |                          | V/ $\mu\text{s}$             |
| $\phi_m$        | Phase margin                                                           | $C_L = 100\text{ pF}$                                                                                                                                                                                                   |                              | 53           |                          | Degrees                      |
| $e_n$           | Input voltage noise                                                    | $f = 1\text{ kHz}$                                                                                                                                                                                                      |                              | 27           |                          | nV/ $\sqrt{\text{Hz}}$       |
| THD             | Total harmonic distortion                                              |                                                                                                                                                                                                                         |                              | 0.01         |                          | %                            |

1. All parameter limits at temperatures different from 25 °C are guaranteed by correlation.

2. Maximum values include unavoidable inaccuracies of the industrial tests.

**Table 6. Electrical characteristics measured at  $V_{CC} = +5\text{ V}$  with  $V_{CC-} = 0\text{ V}$ ,  $C_L$  and  $R_L$  connected to  $V_{CC}/2$ , and  $T_{amb} = 25\text{ °C}$  (unless otherwise specified)<sup>(1)</sup>**

| Symbol          | Parameter                                                                 | Conditions                                                                                                                                                                                                              | Min.                         | Typ.         | Max.                     | Unit                         |
|-----------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------|--------------------------|------------------------------|
| $V_{io}$        | Input offset voltage                                                      | $V_{icm} = V_{out} = V_{CC}/2$<br>TS1871A/2A/4A<br>$T_{min} \leq T_{amb} \leq T_{max}$<br>TS1871/2/4<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                             |                              | 0.1          | 1<br>1.5<br>3<br>6       | mV                           |
| $\Delta V_{io}$ | Input offset voltage drift                                                |                                                                                                                                                                                                                         |                              | 2            |                          | $\mu\text{V}/^\circ\text{C}$ |
| $I_{io}$        | Input offset current                                                      | $V_{icm} = V_{out} = V_{CC}/2^{(2)}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                             |                              | 3            | 30<br>60                 | nA                           |
| $I_{ib}$        | Input bias current                                                        | $V_{icm} = V_{out} = V_{CC}/2^{(2)}$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                             |                              | 70           | 130<br>150               | nA                           |
| CMR             | Common mode rejection ratio<br>$20 \log (\Delta V_{io}/\Delta V_{io})$    | $0 \leq V_{icm} \leq V_{CC}$ , $V_{out}$ not equal to $V_{CC}/2$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                 | 65<br>62                     | 85           |                          | dB                           |
| SVR             | Supply voltage rejection ratio<br>$20 \log (\Delta V_{CC}/\Delta V_{io})$ | $V_{CC} = 1.8$ to $5\text{ V}$                                                                                                                                                                                          | 70                           | 90           |                          | dB                           |
| $A_{vd}$        | Large signal voltage gain                                                 | $V_{out} = 1$ to $4\text{ V}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$                                                                                                                                  | 83<br>77                     | 97<br>91     |                          | dB                           |
| $V_{OH}$        | High level output voltage                                                 | $V_{id} = 100\text{ mV}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 2\text{ k}\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 600\text{ }\Omega$  | 4.80<br>4.75<br>4.80<br>4.75 | 4.95<br>4.90 |                          | V                            |
| $V_{OL}$        | Low level output voltage                                                  | $V_{id} = -100\text{ mV}$<br>$R_L = 2\text{ k}\Omega$<br>$R_L = 600\text{ }\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 2\text{ k}\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$ , $R_L = 600\text{ }\Omega$ |                              | 52<br>70     | 130<br>188<br>130<br>188 | mV                           |
| $I_o$           | Output source current                                                     | $V_{id} = 100\text{ mV}$ , $V_O = V_{CC-}$                                                                                                                                                                              | 20                           | 65           |                          | mA                           |
|                 | Output sink current                                                       | $V_{id} = -100\text{ mV}$ , $V_O = V_{CC+}$                                                                                                                                                                             | 20                           | 80           |                          |                              |
| $I_{CC}$        | Supply current (per amplifier)                                            | $V_{out} = V_{CC}/2$<br>$A_{VCL} = 1$ , no load<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                                                  |                              | 500          | 835<br>875               | $\mu\text{A}$                |
| GBP             | Gain bandwidth product                                                    | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $f = 100\text{ kHz}$                                                                                                                                                | 1                            | 1.8          |                          | MHz                          |
| SR              | Slew rate                                                                 | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $A_V = 1$                                                                                                                                                           | 0.42                         | 0.6          |                          | V/ $\mu\text{s}$             |
| $\phi_m$        | Phase margin                                                              | $C_L = 100\text{ pF}$                                                                                                                                                                                                   |                              | 55           |                          | Degrees                      |
| $e_n$           | Input voltage noise                                                       | $f = 1\text{ kHz}$                                                                                                                                                                                                      |                              | 27           |                          | nV/ $\sqrt{\text{Hz}}$       |
| THD             | Total harmonic distortion                                                 |                                                                                                                                                                                                                         |                              | 0.01         |                          | %                            |

1. All parameter limits at temperatures different from  $25\text{ °C}$  are guaranteed by correlation.

2. Maximum values include unavoidable inaccuracies of the industrial tests.

Figure 1. Input offset voltage distribution

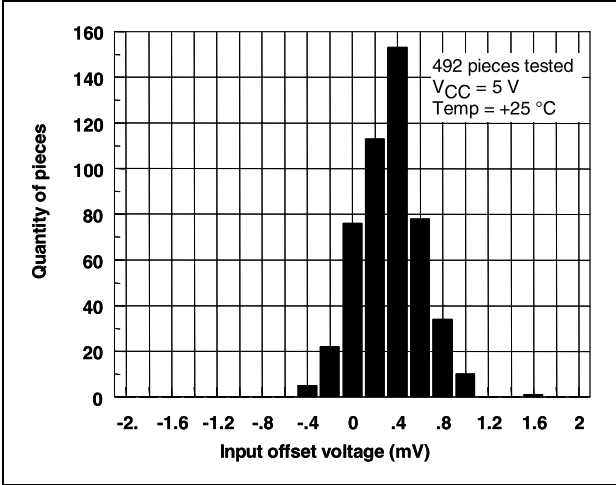


Figure 2. Input offset voltage vs. temperature

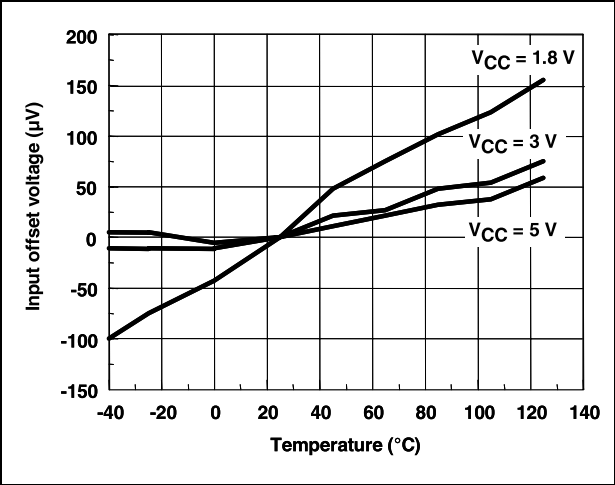


Figure 3. Input bias current vs. temperature at  $V_{CC} = 1.8\text{ V}$

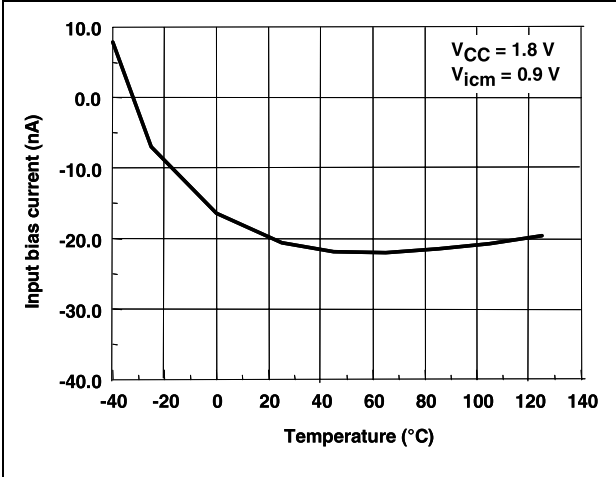


Figure 4. Input bias current vs. temperature at  $V_{CC} = 3\text{ V}$

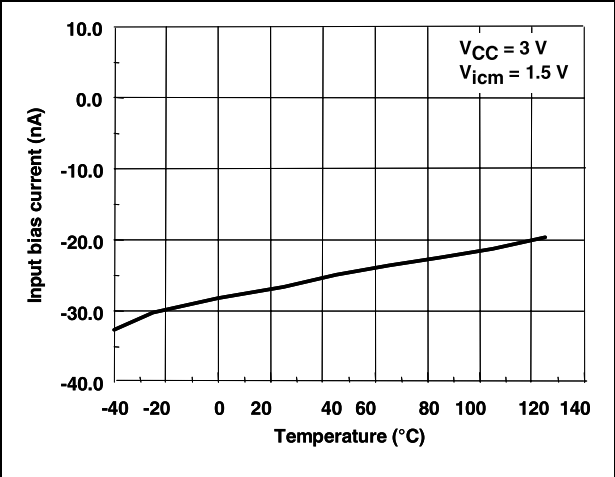


Figure 5. Supply current/amplifier vs. supply voltage

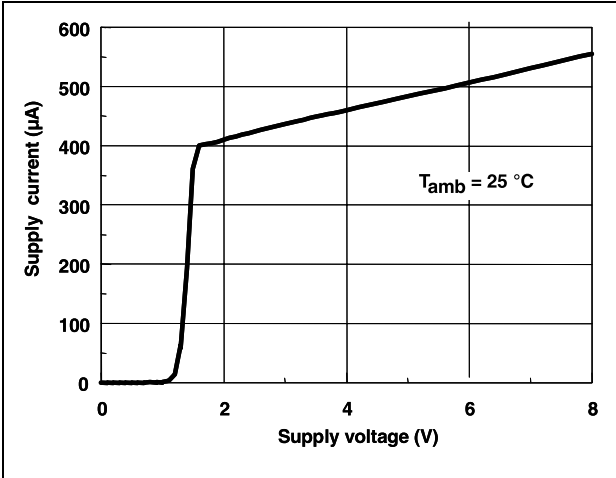


Figure 6. Supply current/amplifier vs. temperature

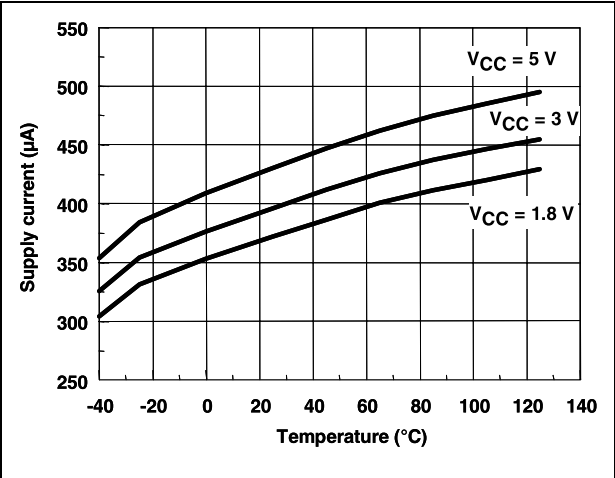


Figure 7. Common mode rejection vs. temperature

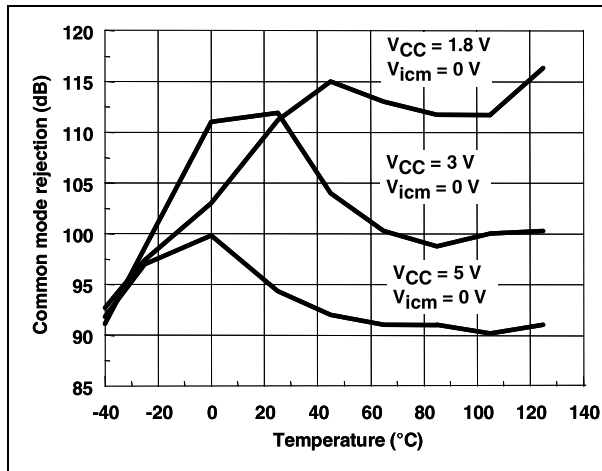


Figure 8. Supply voltage rejection vs. temperature at  $V_{CC} = 1.8\text{ V}$

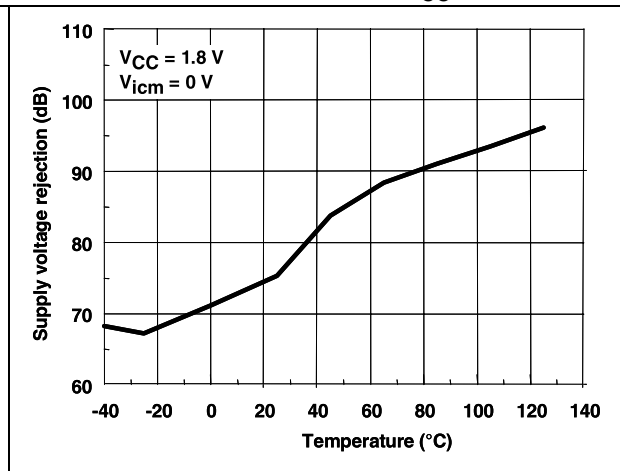


Figure 9. Supply voltage rejection vs. temperature at  $V_{CC} = 3\text{ V}$

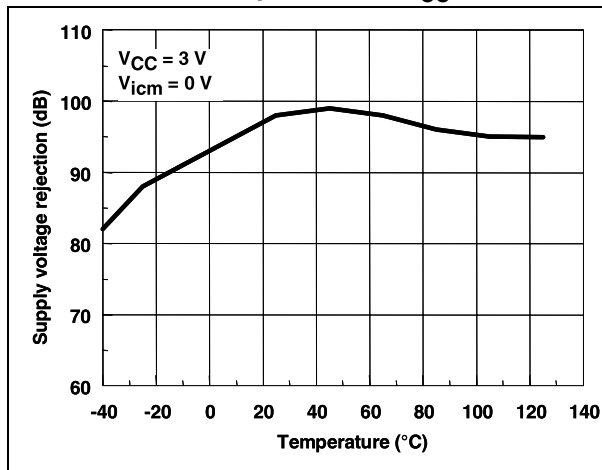


Figure 10. Supply voltage rejection vs. temperature at  $V_{CC} = 5\text{ V}$

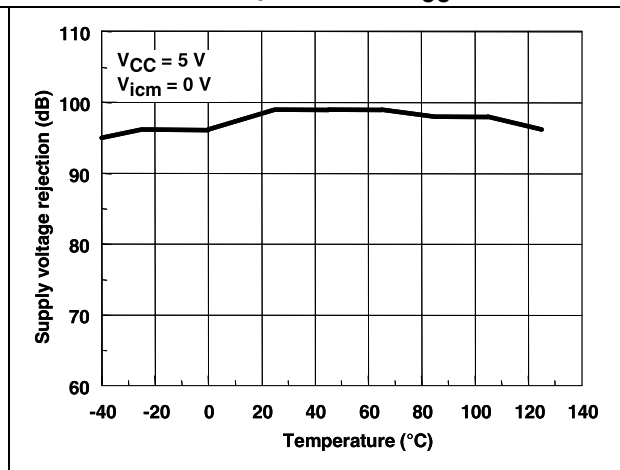


Figure 11. Power supply voltage rejection vs. frequency

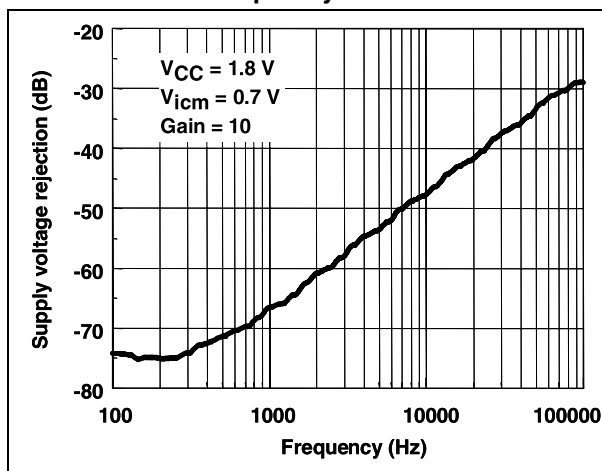


Figure 12. Open loop gain vs. temperature at  $V_{CC} = 1.8\text{ V}$

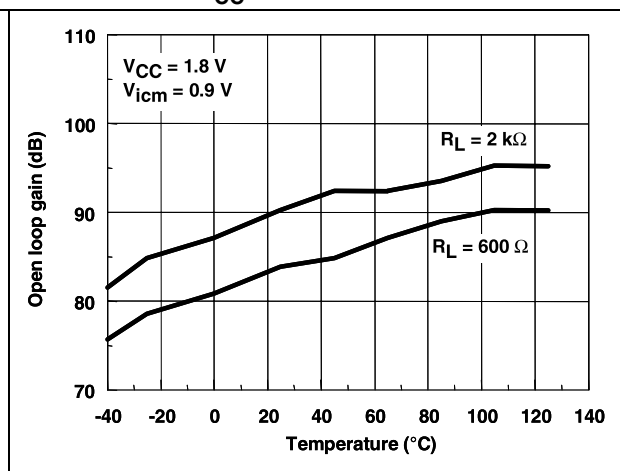


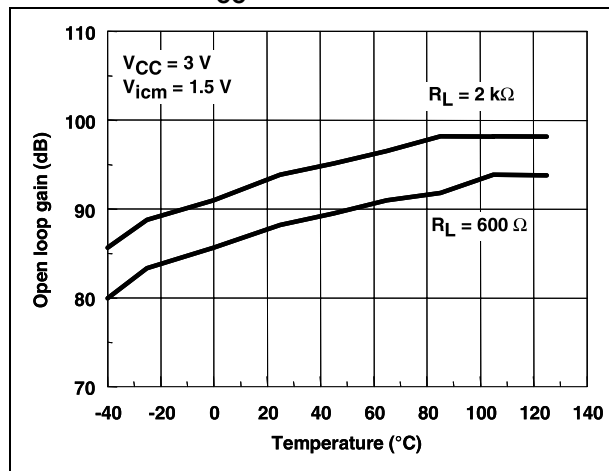
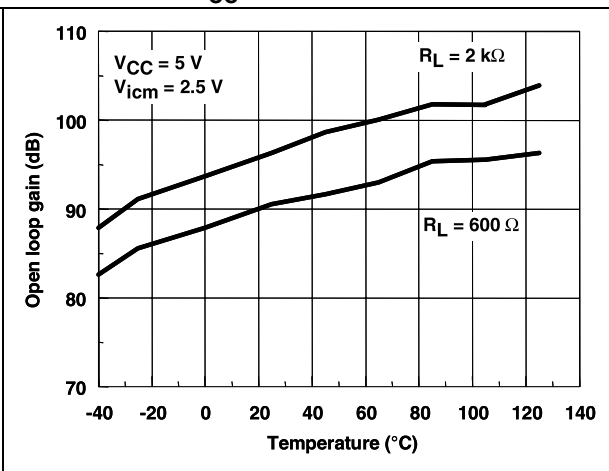
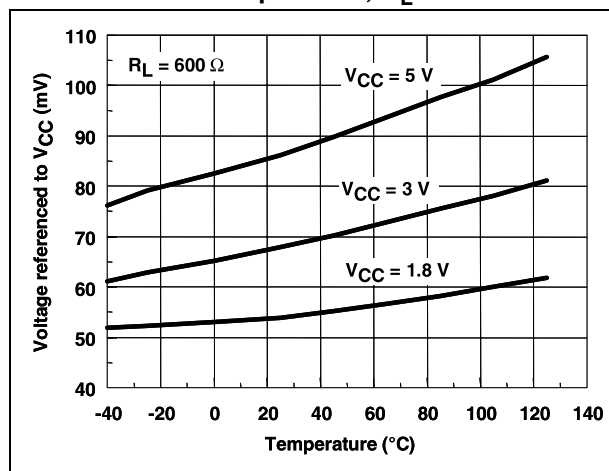
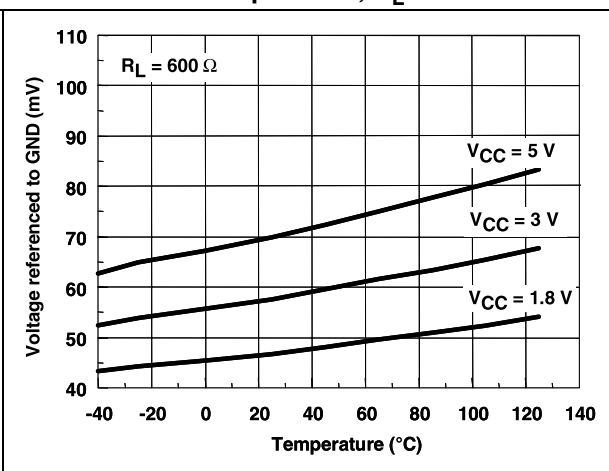
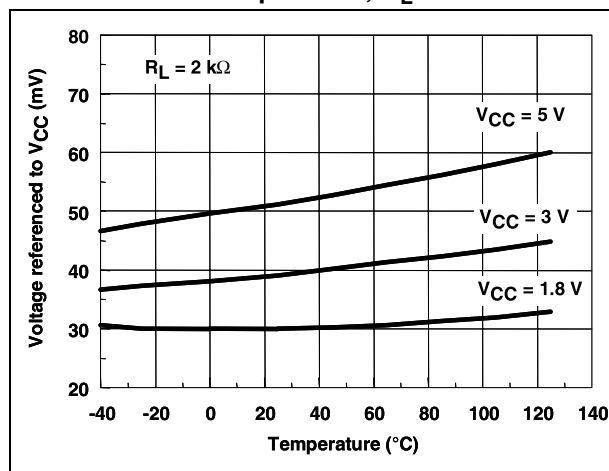
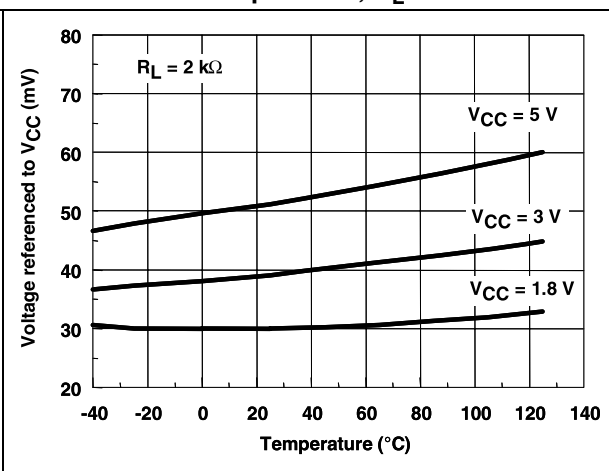
Figure 13. Open loop gain vs. temperature at  $V_{CC} = 3\text{ V}$ Figure 14. Open loop gain vs. temperature at  $V_{CC} = 5\text{ V}$ Figure 15. High level output voltage vs. temperature,  $R_L = 600\text{ }\Omega$ Figure 16. Low level output voltage vs. temperature,  $R_L = 600\text{ }\Omega$ Figure 17. High level output voltage vs. temperature,  $R_L = 2\text{ k}\Omega$ Figure 18. Low level output voltage vs. temperature,  $R_L = 2\text{ k}\Omega$ 

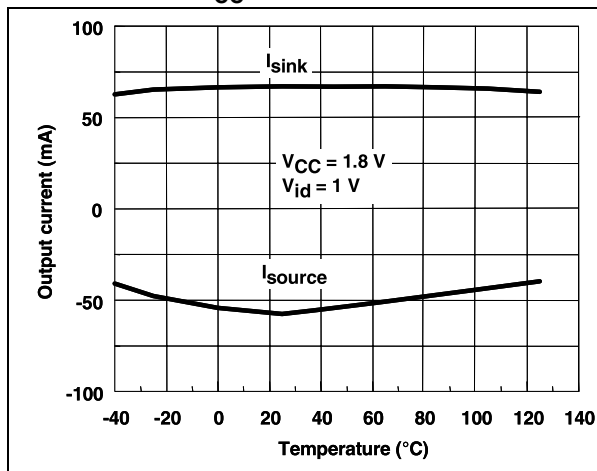
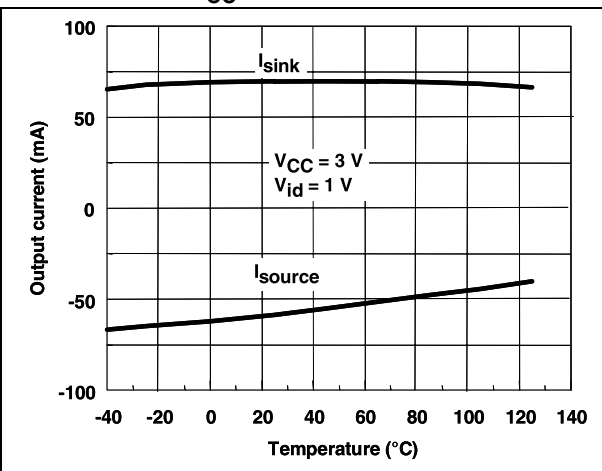
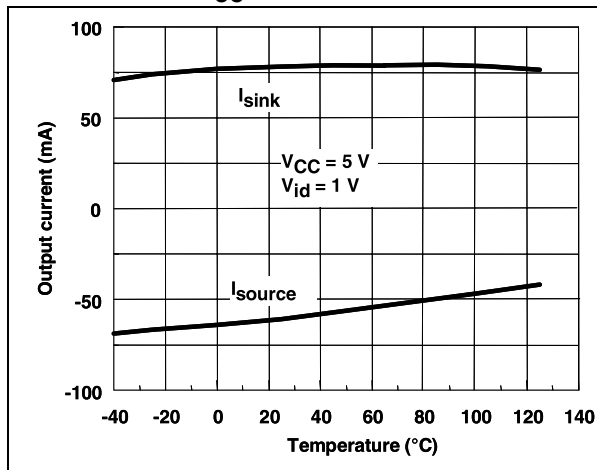
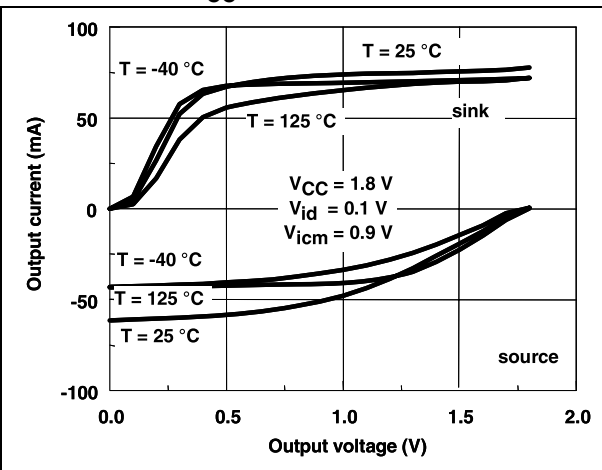
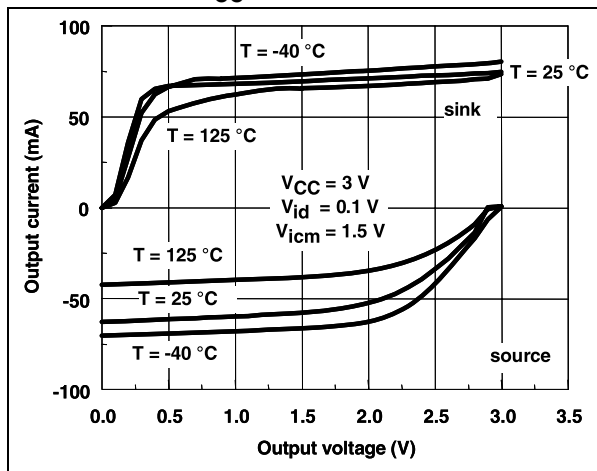
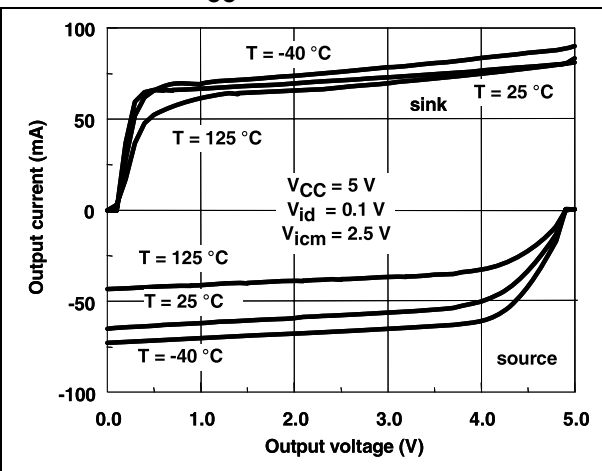
Figure 19. Output current vs. temperature at  $V_{CC} = 1.8\text{ V}$ Figure 20. Output current vs. temperature at  $V_{CC} = 3\text{ V}$ Figure 21. Output current vs. temperature at  $V_{CC} = 5\text{ V}$ Figure 22. Output current vs. output voltage at  $V_{CC} = 1.8\text{ V}$ Figure 23. Output current vs. output voltage at  $V_{CC} = 3\text{ V}$ Figure 24. Output current vs. output voltage at  $V_{CC} = 5\text{ V}$ 

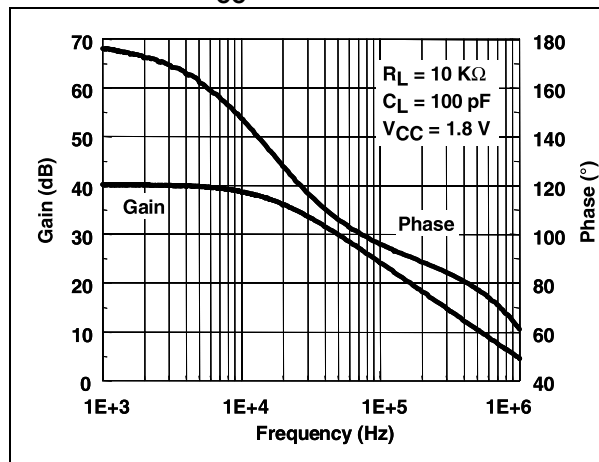
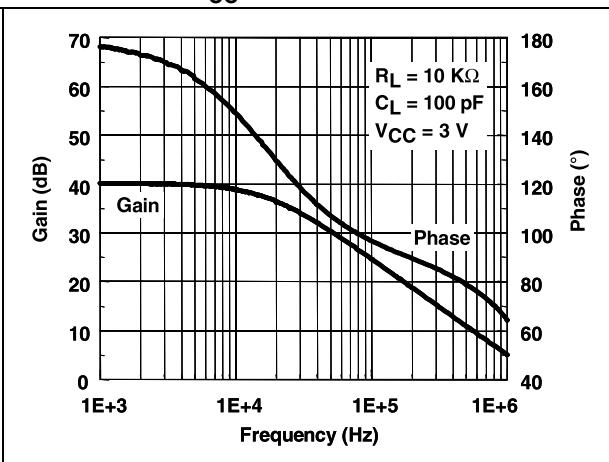
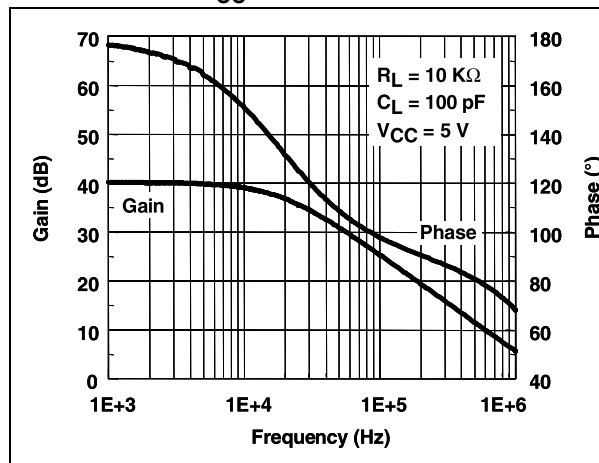
Figure 25. Gain and phase vs. frequency at  $V_{CC} = 1.8\text{ V}$ Figure 26. Gain and phase vs. frequency at  $V_{CC} = 3\text{ V}$ Figure 27. Gain and phase vs. frequency at  $V_{CC} = 5\text{ V}$ 

Figure 28. Gain bandwidth product vs. temperature

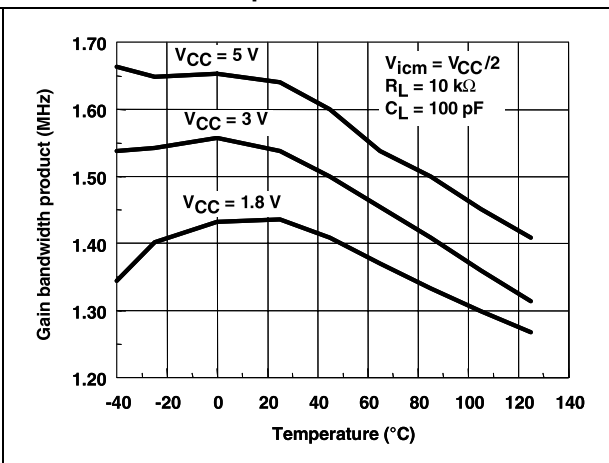


Figure 29. Gain bandwidth product vs. supply voltage

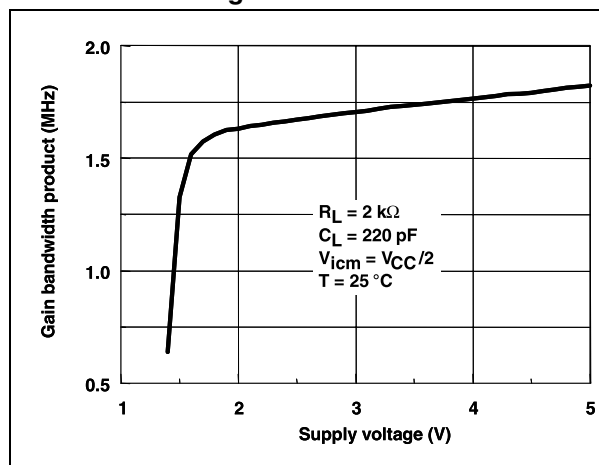
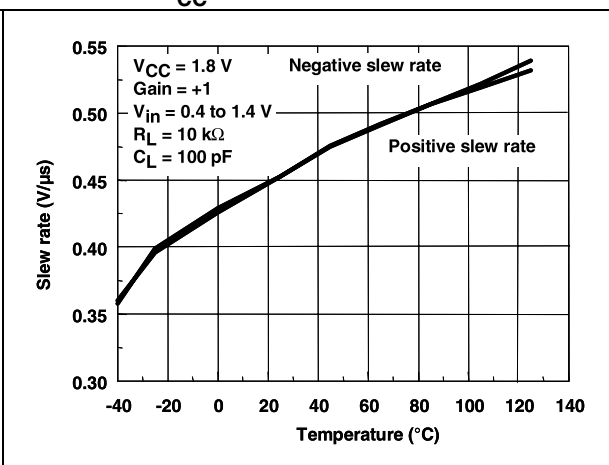
Figure 30. Slew rate vs. temperature at  $V_{CC} = 1.8\text{ V}$ 

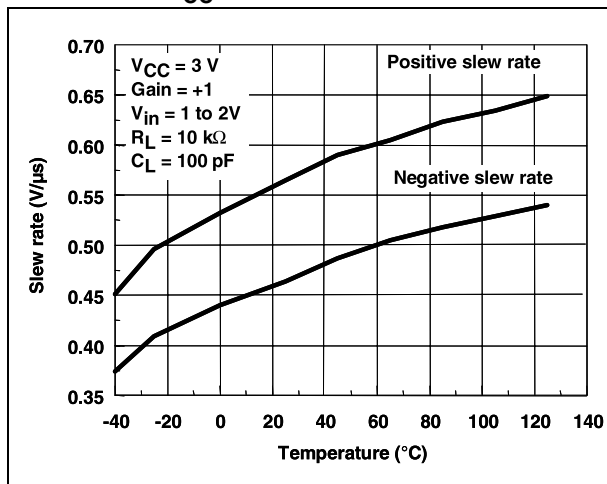
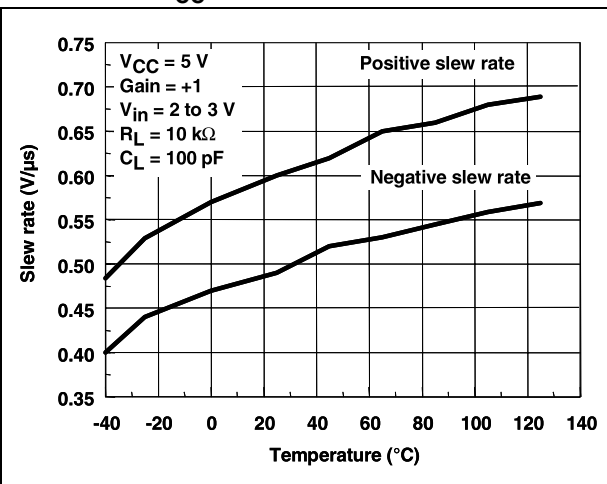
Figure 31. Slew rate vs. temperature at  $V_{CC} = 3\text{ V}$ Figure 32. Slew rate vs. temperature at  $V_{CC} = 5\text{ V}$ 

Figure 33. Phase margin vs. load capacitor

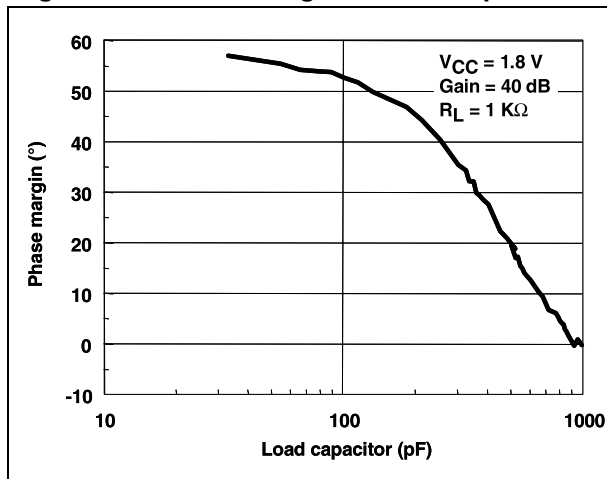


Figure 34. Phase margin vs. output current

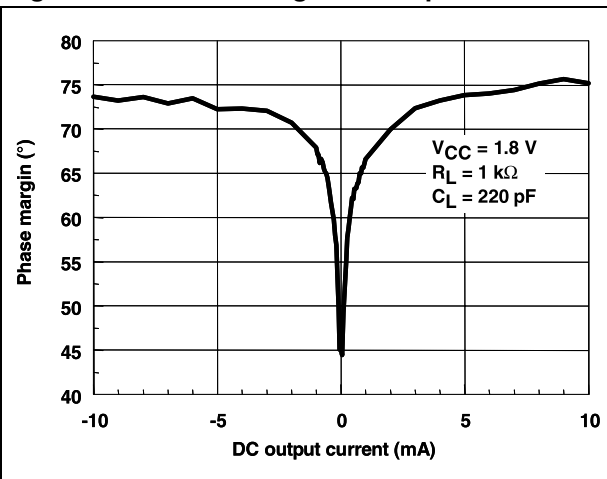


Figure 35. Gain margin vs. output current

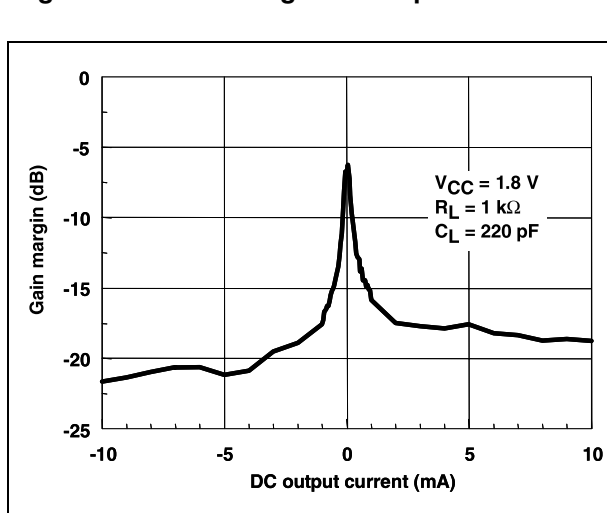


Figure 36. Equivalent input noise vs. frequency

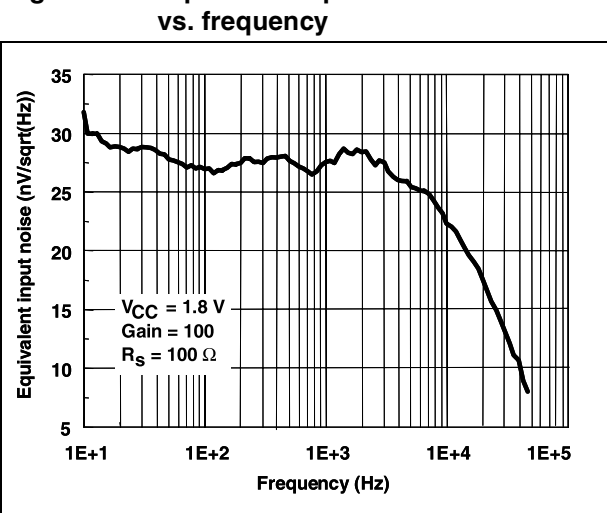


Figure 37. Distortion vs. output voltage  
at  $V_{CC} = 1.8\text{ V}$

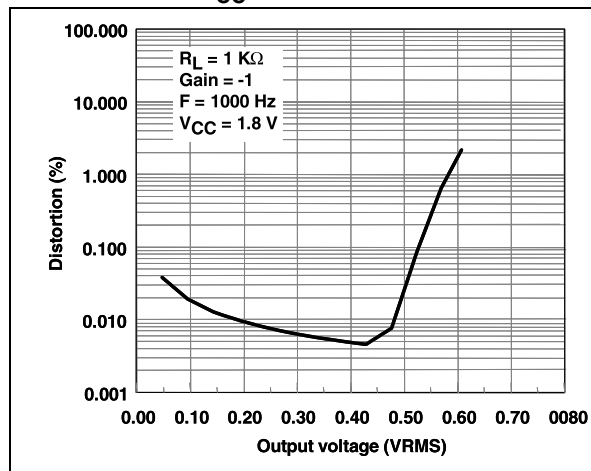


Figure 38. Distortion vs. output voltage  
at  $V_{CC} = 3\text{ V}$

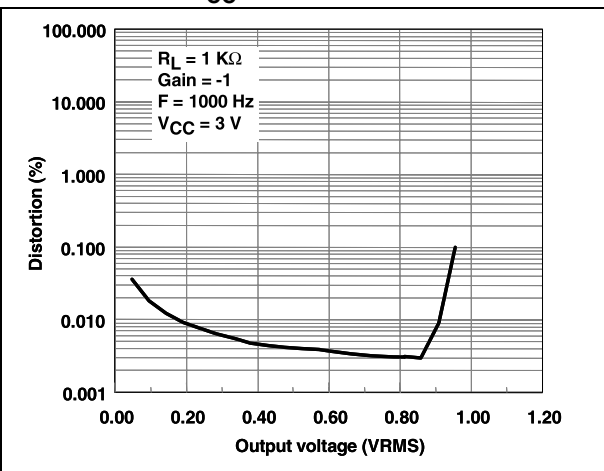


Figure 39. Distortion vs. output voltage  
at  $V_{CC} = 5\text{ V}$

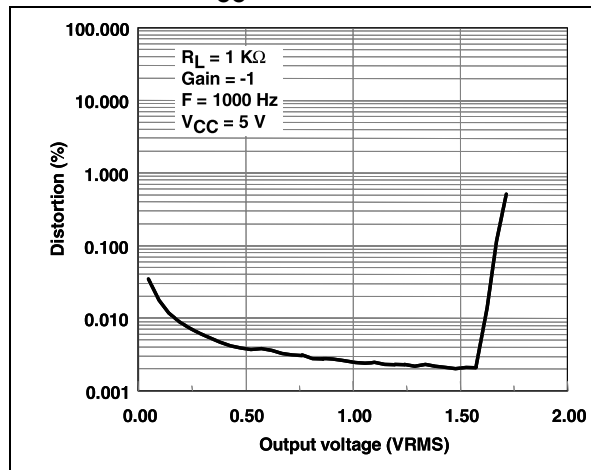


Figure 40. Distortion vs. output voltage  
at  $V_{CC} = 2.7\text{ V}$ ,  $R_L = 150\ \Omega$

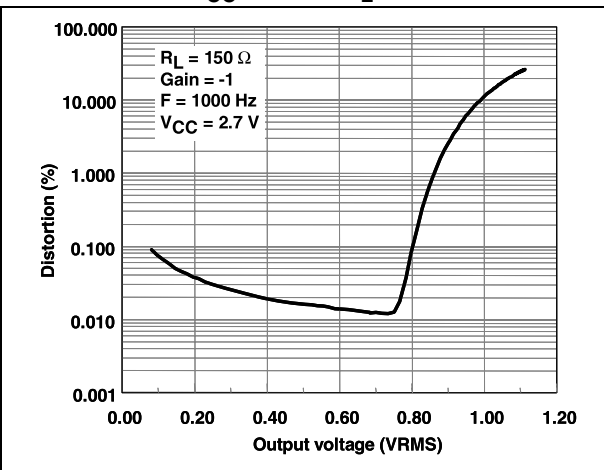


Figure 41. Distortion vs. output voltage  
at  $V_{CC} = 2.7\text{ V}$ ,  $R_L = 1500\ \Omega$

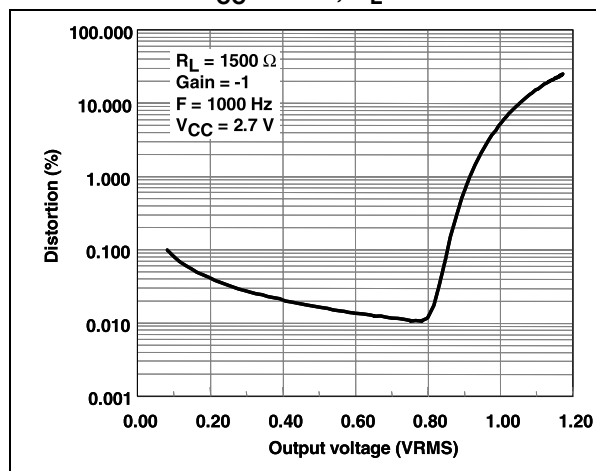


Figure 42. Distortion vs. output voltage  
at  $V_{CC} = 2.7\text{ V}$ ,  $R_L = 4700\ \Omega$

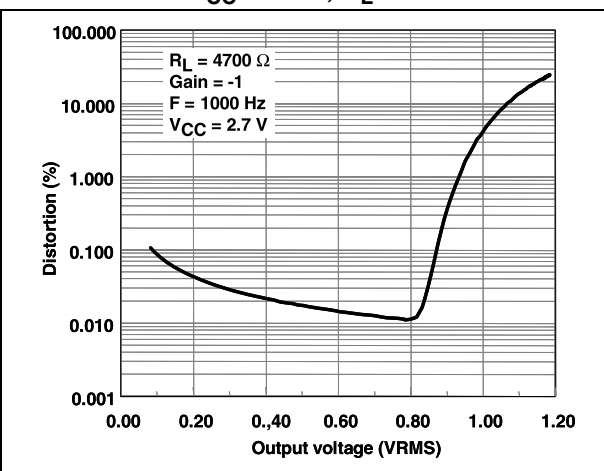


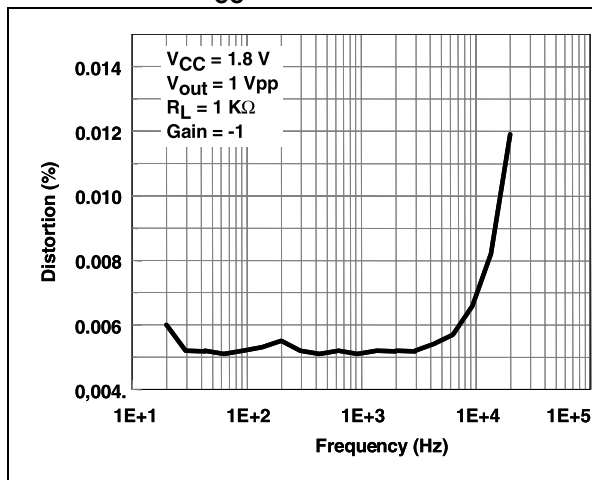
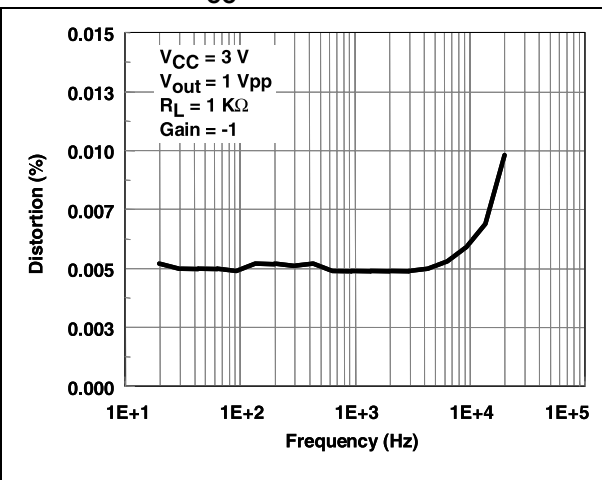
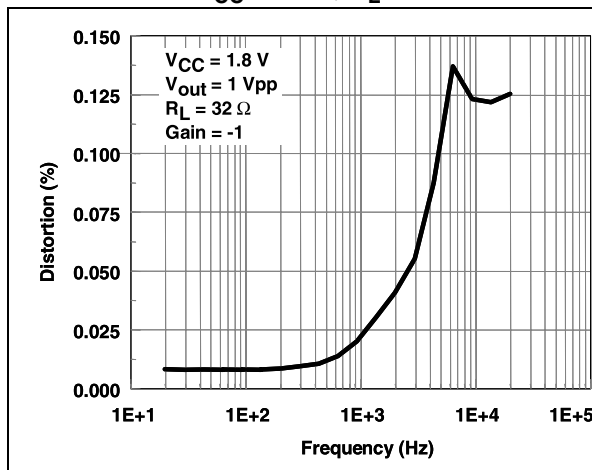
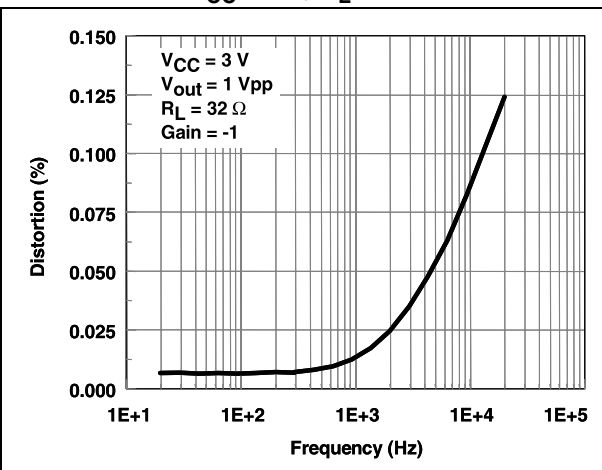
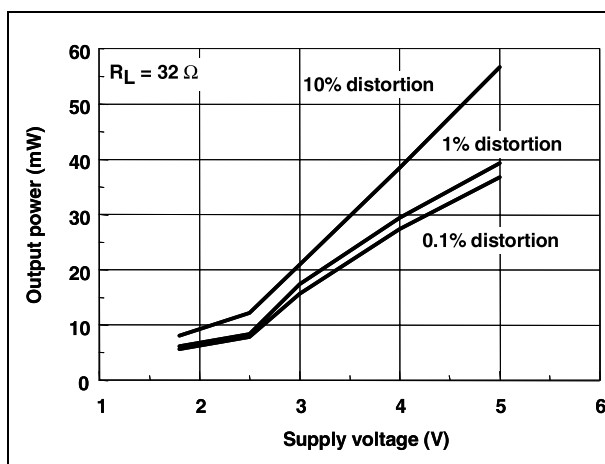
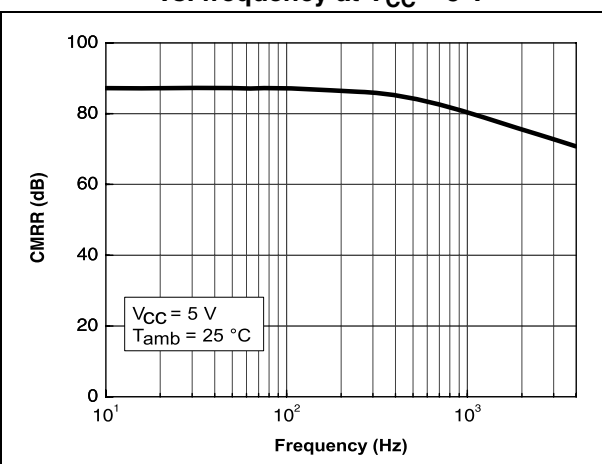
Figure 43. Distortion vs. frequency  
at  $V_{CC} = 1.8\text{ V}$ Figure 44. Distortion vs. frequency  
at  $V_{CC} = 3\text{ V}$ Figure 45. Distortion vs. frequency  
at  $V_{CC} = 1.8\text{ V}$ ,  $R_L = 32\ \Omega$ Figure 46. Distortion vs. frequency  
at  $V_{CC} = 3\text{ V}$ ,  $R_L = 32\ \Omega$ 

Figure 47. Output power vs. supply voltage

Figure 48. Common mode rejection ratio  
vs. frequency at  $V_{CC} = 5\text{ V}$ 

### 3 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 3.1 SO-8 package information

Figure 49. SO-8 package outline

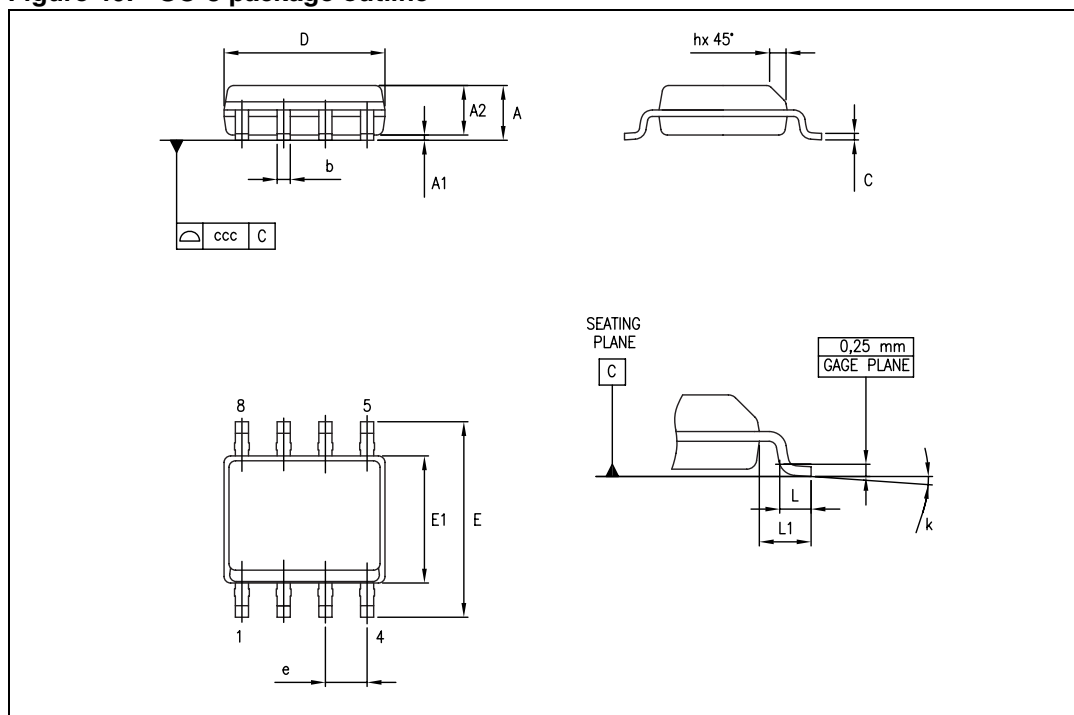


Table 7. SO-8 package mechanical data

| Symbol | Dimensions  |      |      |        |       |       |
|--------|-------------|------|------|--------|-------|-------|
|        | Millimeters |      |      | Inches |       |       |
|        | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A      |             |      | 1.75 |        |       | 0.069 |
| A1     | 0.10        |      | 0.25 | 0.004  |       | 0.010 |
| A2     | 1.25        |      |      | 0.049  |       |       |
| b      | 0.28        |      | 0.48 | 0.011  |       | 0.019 |
| c      | 0.17        |      | 0.23 | 0.007  |       | 0.010 |
| D      | 4.80        | 4.90 | 5.00 | 0.189  | 0.193 | 0.197 |
| E      | 5.80        | 6.00 | 6.20 | 0.228  | 0.236 | 0.244 |
| E1     | 3.80        | 3.90 | 4.00 | 0.150  | 0.154 | 0.157 |
| e      |             | 1.27 |      |        | 0.050 |       |
| h      | 0.25        |      | 0.50 | 0.010  |       | 0.020 |
| L      | 0.40        |      | 1.27 | 0.016  |       | 0.050 |
| L1     |             | 1.04 |      |        | 0.040 |       |
| k      | 1°          |      | 8°   | 1°     |       | 8°    |
| ccc    |             |      | 0.10 |        |       | 0.004 |

### 3.2 TSSOP8 package information

Figure 50. TSSOP8 package outline

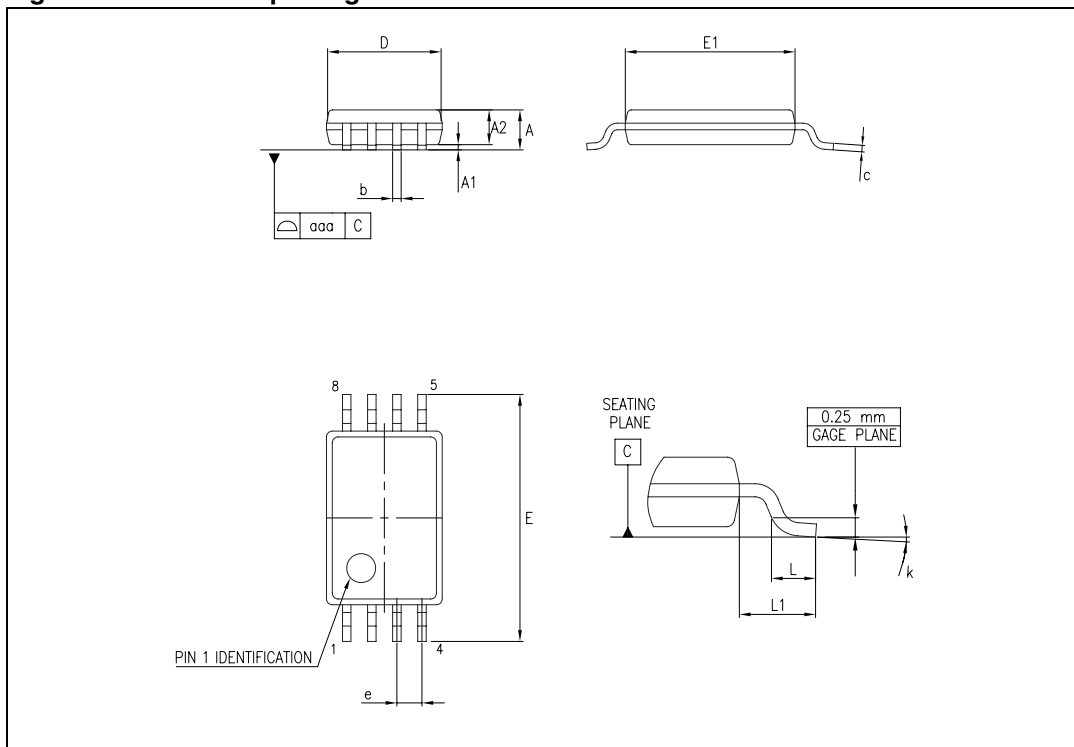


Table 8. TSSOP8 package mechanical data

| Symbol | Dimensions  |      |      |        |        |       |
|--------|-------------|------|------|--------|--------|-------|
|        | Millimeters |      |      | Inches |        |       |
|        | Min.        | Typ. | Max. | Min.   | Typ.   | Max.  |
| A      |             |      | 1.20 |        |        | 0.047 |
| A1     | 0.05        |      | 0.15 | 0.002  |        | 0.006 |
| A2     | 0.80        | 1.00 | 1.05 | 0.031  | 0.039  | 0.041 |
| b      | 0.19        |      | 0.30 | 0.007  |        | 0.012 |
| c      | 0.09        |      | 0.20 | 0.004  |        | 0.008 |
| D      | 2.90        | 3.00 | 3.10 | 0.114  | 0.118  | 0.122 |
| E      | 6.20        | 6.40 | 6.60 | 0.244  | 0.252  | 0.260 |
| E1     | 4.30        | 4.40 | 4.50 | 0.169  | 0.173  | 0.177 |
| e      |             | 0.65 |      |        | 0.0256 |       |
| k      | 0°          |      | 8°   | 0°     |        | 8°    |
| L      | 0.45        | 0.60 | 0.75 | 0.018  | 0.024  | 0.030 |
| L1     |             | 1    |      |        | 0.039  |       |
| aaa    |             |      | 0.10 |        |        | 0.004 |

### 3.3 MiniSO-8 package information

Figure 51. MiniSO-8 package outline

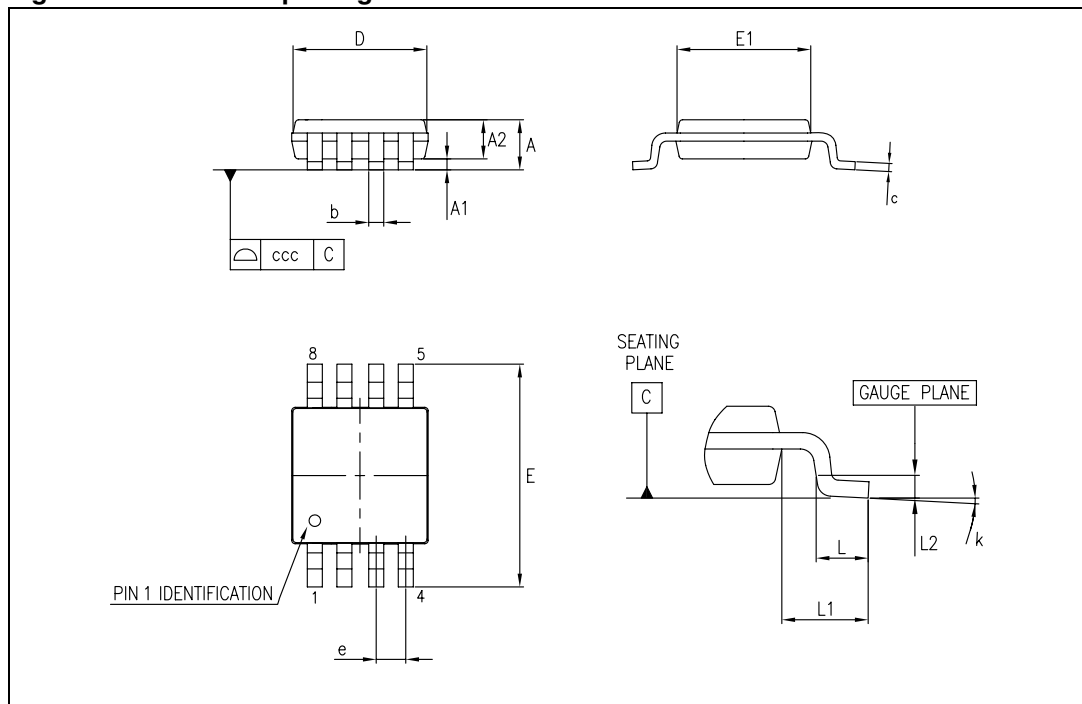


Table 9. MiniSO-8 package mechanical data

| Symbol | Dimensions  |      |      |        |       |       |
|--------|-------------|------|------|--------|-------|-------|
|        | Millimeters |      |      | Inches |       |       |
|        | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A      |             |      | 1.1  |        |       | 0.043 |
| A1     | 0           |      | 0.15 | 0      |       | 0.006 |
| A2     | 0.75        | 0.85 | 0.95 | 0.030  | 0.033 | 0.037 |
| b      | 0.22        |      | 0.40 | 0.009  |       | 0.016 |
| c      | 0.08        |      | 0.23 | 0.003  |       | 0.009 |
| D      | 2.80        | 3.00 | 3.20 | 0.11   | 0.118 | 0.126 |
| E      | 4.65        | 4.90 | 5.15 | 0.183  | 0.193 | 0.203 |
| E1     | 2.80        | 3.00 | 3.10 | 0.11   | 0.118 | 0.122 |
| e      |             | 0.65 |      |        | 0.026 |       |
| L      | 0.40        | 0.60 | 0.80 | 0.016  | 0.024 | 0.031 |
| L1     |             | 0.95 |      |        | 0.037 |       |
| L2     |             | 0.25 |      |        | 0.010 |       |
| k      | 0°          |      | 8°   | 0°     |       | 8°    |
| ccc    |             |      | 0.10 |        |       | 0.004 |

### 3.4 SO-14 package information

Figure 52. SO-14 package outline

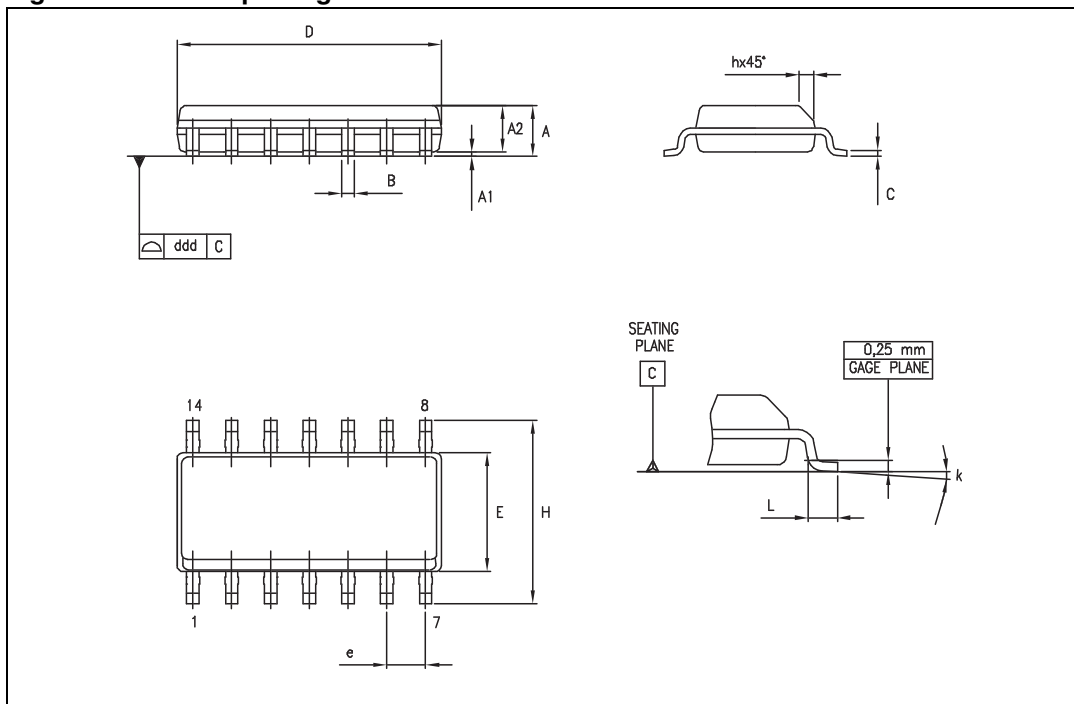


Table 10. SO-14 package mechanical data

| Symbol | Dimensions  |      |      |        |      |       |
|--------|-------------|------|------|--------|------|-------|
|        | Millimeters |      |      | Inches |      |       |
|        | Min.        | Typ. | Max. | Min.   | Typ. | Max.  |
| A      | 1.35        |      | 1.75 | 0.05   |      | 0.068 |
| A1     | 0.10        |      | 0.25 | 0.004  |      | 0.009 |
| A2     | 1.10        |      | 1.65 | 0.04   |      | 0.06  |
| B      | 0.33        |      | 0.51 | 0.01   |      | 0.02  |
| C      | 0.19        |      | 0.25 | 0.007  |      | 0.009 |
| D      | 8.55        |      | 8.75 | 0.33   |      | 0.34  |
| E      | 3.80        |      | 4.0  | 0.15   |      | 0.15  |
| e      |             | 1.27 |      |        | 0.05 |       |
| H      | 5.80        |      | 6.20 | 0.22   |      | 0.24  |
| h      | 0.25        |      | 0.50 | 0.009  |      | 0.02  |
| L      | 0.40        |      | 1.27 | 0.015  |      | 0.05  |
| k      | 8° (max.)   |      |      |        |      |       |
| ddd    |             |      | 0.10 |        |      | 0.004 |

### 3.5 TSSOP14 package information

Figure 53. TSSOP14 package outline

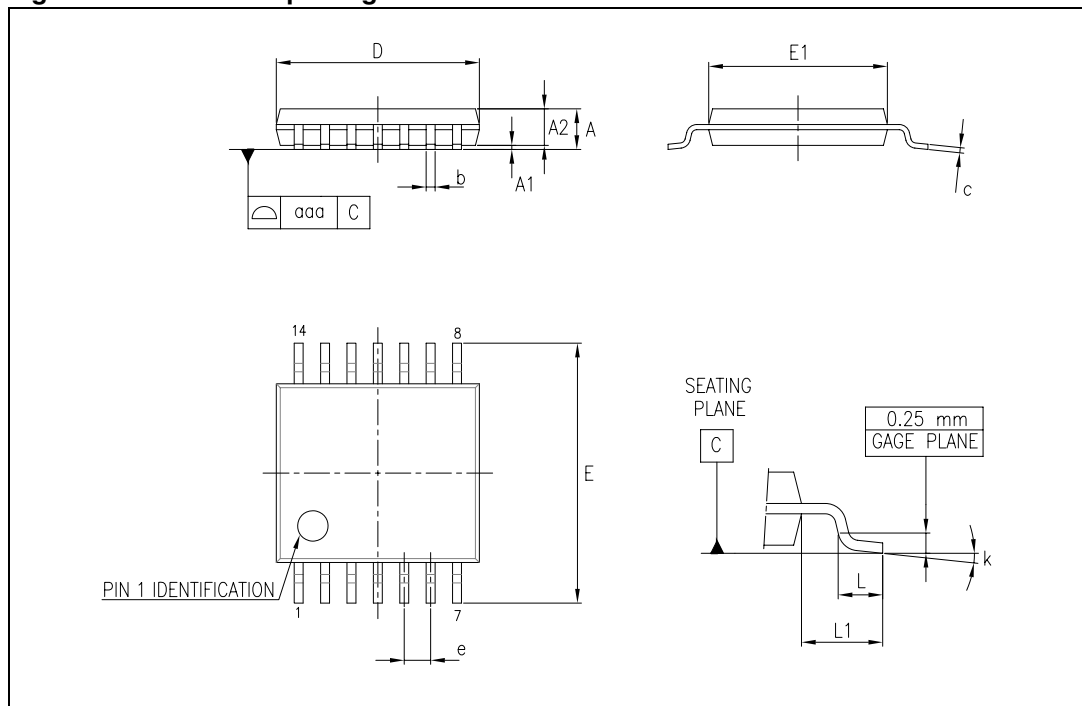


Table 11. TSSOP14 package mechanical data

| Symbol | Dimensions  |      |      |        |        |        |
|--------|-------------|------|------|--------|--------|--------|
|        | Millimeters |      |      | Inches |        |        |
|        | Min.        | Typ. | Max. | Min.   | Typ.   | Max.   |
| A      |             |      | 1.20 |        |        | 0.047  |
| A1     | 0.05        |      | 0.15 | 0.002  | 0.004  | 0.006  |
| A2     | 0.80        | 1.00 | 1.05 | 0.031  | 0.039  | 0.041  |
| b      | 0.19        |      | 0.30 | 0.007  |        | 0.012  |
| c      | 0.09        |      | 0.20 | 0.004  |        | 0.0089 |
| D      | 4.90        | 5.00 | 5.10 | 0.193  | 0.197  | 0.201  |
| E      | 6.20        | 6.40 | 6.60 | 0.244  | 0.252  | 0.260  |
| E1     | 4.30        | 4.40 | 4.50 | 0.169  | 0.173  | 0.176  |
| e      |             | 0.65 |      |        | 0.0256 |        |
| L      | 0.45        | 0.60 | 0.75 | 0.018  | 0.024  | 0.030  |
| L1     |             | 1.00 |      |        | 0.039  |        |
| k      | 0°          |      | 8°   | 0°     |        | 8°     |
| aaa    |             |      | 0.10 |        |        | 0.004  |

### 3.6 SOT23-5 package information

Figure 54. SOT23-5L package outline

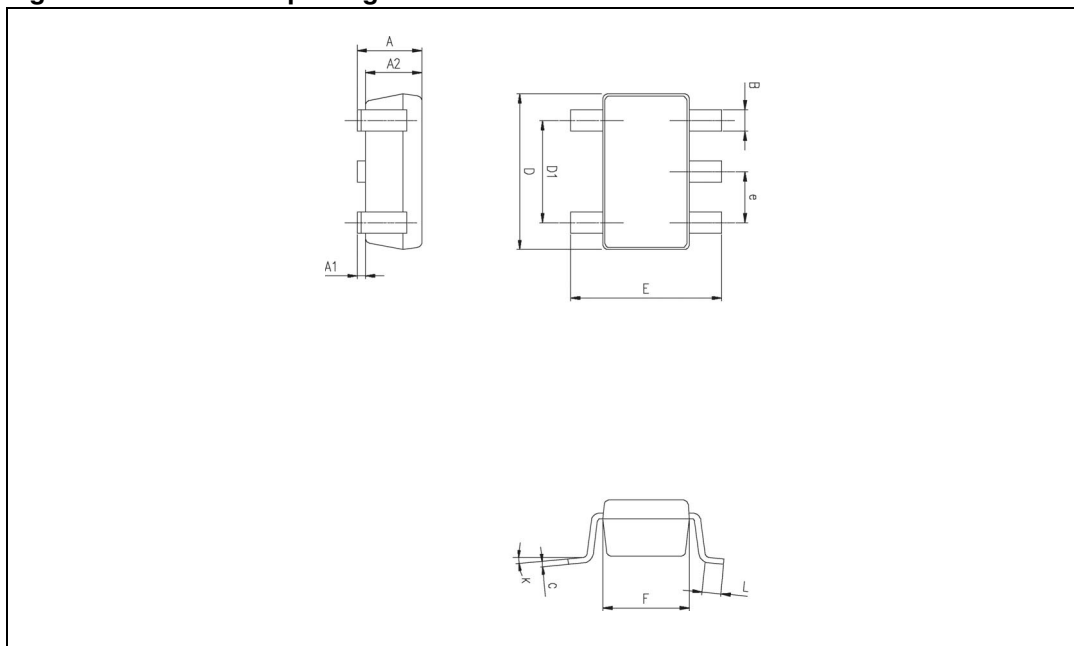


Table 12. SOT23-5L package mechanical data

| Symbol | Dimensions  |      |      |        |       |       |
|--------|-------------|------|------|--------|-------|-------|
|        | Millimeters |      |      | Inches |       |       |
|        | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A      | 0.90        | 1.20 | 1.45 | 0.035  | 0.047 | 0.057 |
| A1     |             |      | 0.15 |        |       | 0.006 |
| A2     | 0.90        | 1.05 | 1.30 | 0.035  | 0.041 | 0.051 |
| B      | 0.35        | 0.40 | 0.50 | 0.013  | 0.015 | 0.019 |
| C      | 0.09        | 0.15 | 0.20 | 0.003  | 0.006 | 0.008 |
| D      | 2.80        | 2.90 | 3.00 | 0.110  | 0.114 | 0.118 |
| D1     |             | 1.90 |      |        | 0.075 |       |
| e      |             | 0.95 |      |        | 0.037 |       |
| E      | 2.60        | 2.80 | 3.00 | 0.102  | 0.110 | 0.118 |
| F      | 1.50        | 1.60 | 1.75 | 0.059  | 0.063 | 0.069 |
| L      | 0.10        | 0.35 | 0.60 | 0.004  | 0.013 | 0.023 |
| K      | 0°          |      | 10°  |        |       |       |

## 4 Ordering information

Table 13. Order codes

| Order code                 | Temperature range | Package                        | Packaging                | Marking  |
|----------------------------|-------------------|--------------------------------|--------------------------|----------|
| TS1871ID/IDT               | -40 °C to +125 °C | SO-8                           | Tube or<br>tape and reel | 1871I    |
| TS1871AID/AIDT             |                   |                                |                          | 1871AI   |
| TS1871ILT                  |                   | SOT23-5L                       | Tape and reel            | K171     |
| TS1871AILT                 |                   |                                |                          | K172     |
| TS1871IYLT <sup>(1)</sup>  |                   | SOT23-5L<br>(automotive grade) | Tape and reel            | K182     |
| TS1871AIYLT <sup>(1)</sup> |                   |                                |                          | K183     |
| TS1872ID/IDT               |                   | SO-8                           | Tube or<br>tape and reel | 1872I    |
| TS1872AID/AIDT             |                   |                                |                          | 1872AI   |
| TS1872IYDT <sup>(1)</sup>  |                   | SO-8<br>(automotive grade)     | Tube or<br>tape and reel | 1872Y    |
| TS1872AIYDT <sup>(1)</sup> |                   |                                |                          | 1872AY   |
| TS1872IPT                  |                   | TSSOP8                         | Tape and reel            | 1872I    |
| TS1872AIPT                 |                   |                                |                          | 1872A    |
| TS1872IYPT <sup>(1)</sup>  |                   | TSSOP8<br>(automotive grade)   | Tape and reel            | 1872Y    |
| TS1872AIYPT <sup>(1)</sup> |                   |                                |                          | 872AY    |
| TS1872IST                  |                   | MiniSO-8                       | Tape and reel            | K171     |
| TS1872AIST                 |                   |                                |                          | K172     |
| TS1874ID/IDT               |                   | SO-14                          | Tube or<br>tape and reel | 1874I    |
| TS1874AID/AIDT             |                   |                                |                          | 1874AI   |
| TS1874IYDT <sup>(1)</sup>  |                   | SO-14<br>(automotive grade)    | Tape and reel            | TS1874Y  |
| TS1874AIYDT <sup>(1)</sup> |                   |                                |                          | TS1874AY |
| TS1874IPT                  |                   | TSSOP14                        | Tape and reel            | 1874I    |
| TS1874AIPT                 |                   |                                |                          | 1874AI   |
| TS1874IYPT <sup>(1)</sup>  |                   | TSSOP14<br>(automotive grade)  | Tape and reel            | TS1874Y  |
| TS1874AIYPT <sup>(1)</sup> |                   |                                |                          | TS1874AY |

1. Qualified and characterized according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q 002 or equivalent.

## 5 Revision history

**Table 14. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 01-Apr-2002 | 1        | First release.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 02-Jan-2005 | 2        | Modifications on AMR <a href="#">Table 2 on page 3</a> (explanation of $V_{id}$ and $V_i$ limits).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 21-May-2007 | 3        | Added limits over temperature range in <a href="#">Table 4 on page 5</a> , <a href="#">Table 5 on page 6</a> , <a href="#">Table 6 on page 7</a> .<br>Added SVR in <a href="#">Table 6</a> (SVR parameter removed from <a href="#">Table 4</a> and <a href="#">Table 5</a> ).<br>Added equivalent input voltage noise in <a href="#">Table 4</a> , <a href="#">Table 5</a> , and <a href="#">Table 6</a> .<br>Added $R_{thjc}$ values in <a href="#">Table 2</a> .<br>Added automotive grade part numbers to order codes table.<br>Moved order codes table to <a href="#">Section 4 on page 23</a> .<br>Updated format of package information.                                                      |
| 17-Jan-2008 | 4        | Updated footnote for automotive grade order codes in <a href="#">Table 13</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 12-Mar-2010 | 5        | Updated document format.<br>Modified headings, added root part number TS187xA and added <a href="#">Table 1: Device summary</a> on cover page.<br>Corrected typical values for $A_{Vd}$ , $I_{source}$ , $I_{sink}$ and $V_{ol}$ in <a href="#">Table 4</a> , <a href="#">Table 5</a> and <a href="#">Table 6</a> .<br>Added <a href="#">Figure 48: Common mode rejection ratio vs. frequency at <math>V_{CC} = 5\text{ V}</math></a> .<br>Updated package information in <a href="#">Chapter 3</a> .<br>Removed order codes for SO-8 automotive grade packages (TS1871IYDT and TS1871AIYDT) from <a href="#">Table 13</a> .<br>Removed order codes for DIP package from <a href="#">Table 13</a> . |
| 06-Jul-2012 | 6        | Updated <a href="#">Table 13: Order codes</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 19-Nov-2012 | 7        | Updated <a href="#">Features</a> (added MiniSO-8, SO-8, SO-14, TSSOP8, and TSSOP14 package).<br>Updated titles of <a href="#">Table 5</a> and <a href="#">Table 6</a> (replaced $V_{DD}$ by $V_{CC}$ ).<br>Updated TS1871IYLT, TS1871AIYLT, TS1872IYDT, TS1872AIYDT, TS1874IYDT, TS1874AIYDT, TS1874IYPT, TS1872IYPT, TS1872AIYPT, and TS1874AIYPT order code in <a href="#">Table 13</a> (status qualified).<br>Updated packaging for TS1874IYDT and TS1874AIYDT order code (indicated only tape and reel) in <a href="#">Table 13</a> .<br>Added note 1. below <a href="#">Table 13</a> .<br>Minor corrections throughout document.                                                               |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)