


**SERIES**

**4554R & 4564R**  
**4554 & 4564**



**Radial Lead Inductors**

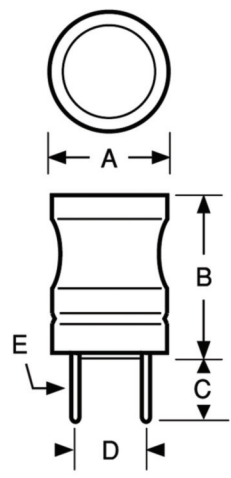

Actual Size (Max.)

**Physical Parameters**

**Series 4554**

	Inches	Millimeters
A	0.34 Max.	8.64 Max.
B	0.433 Max.	11 Max.
C	0.200 Nom.	5.0 Nom.
D	0.200 Nom.	5.0 Nom.
E	0.024 Nom.	0.61 Nom.

**Series 4564**

	Inches	Millimeters
A	0.315 Max.	8.0 Max.
B	0.440 Max.	11.2 Max.
C	0.200 Nom.	5.0 Nom.
D	0.200 Nom.	5.0 Nom.
E	0.028 Nom.	0.71 Nom.

**Operating Temperature Range**

Series 4554 -40°C to +85°C  
Series 4564 -20°C to +80°C

**Storage Temperature Range**

Series 4554 -40°C to +85°C  
Series 4564 -40°C to +80°C

**The Rated DC Current** The amperage where the inductance value decreases 10%.

**\*\*Note: Series 4554 Inductance Tolerance** Available in J = 5% in values ≥ 100µH only

**Packaging** Bulk

Series 4564 Optional Tolerances: J = 5%  
\*Complete part # must include series # PLUS the dash #  
For surface finish information, refer to [www.delevanfinishes.com](http://www.delevanfinishes.com)

DASH NUMBER	INDUCTANCE**	TOLERANCE (%)	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (A)
SERIES 4554 FERRITE CORE						
-1R0M	1.0 µH	±20%	20	7.96	150.0	0.013
-1R5M	1.5 µH	±20%	20	7.96	130.0	0.016
-2R2M	2.2 µH	±20%	20	7.96	100.0	0.021
-3R3M	3.3 µH	±20%	20	7.96	79.0	0.025
-4R7M	4.7 µH	±20%	20	7.96	51.0	0.030
-6R8M	6.8 µH	±20%	20	7.96	29.0	0.035
-100K	10 µH	±10%	50	2.52	14.0	0.055
-120K	12 µH	±10%	50	2.52	13.0	0.060
-150K	15 µH	±10%	50	2.52	12.0	0.065
-180K	18 µH	±10%	40	2.52	11.0	0.085
-220K	22 µH	±10%	40	2.52	9.2	0.095
-270K	27 µH	±10%	40	2.52	8.5	0.120
-330K	33 µH	±10%	30	2.52	7.8	0.140
-390K	39 µH	±10%	30	2.52	6.9	0.160
-470K	47 µH	±10%	30	2.52	6.5	0.200
-560K	56 µH	±10%	30	2.52	5.4	0.210
-680K	68 µH	±10%	30	2.52	4.9	0.210
-820K	82 µH	±10%	30	2.52	4.1	0.230
-101K	100 µH**	±10%	20	0.796	3.7	0.290
-121K	120 µH**	±10%	20	0.796	3.4	0.320
-151K	150 µH**	±10%	20	0.796	3.2	0.450
-181K	180 µH**	±10%	20	0.796	2.8	0.580
-221K	220 µH**	±10%	20	0.796	2.7	0.650
-271K	270 µH**	±10%	20	0.796	2.4	0.800
-331K	330 µH**	±10%	20	0.796	2.3	0.900
-391K	390 µH**	±10%	20	0.796	2.1	1.0
-471K	470 µH**	±10%	20	0.796	1.9	1.1
-561K	560 µH**	±10%	20	0.796	1.8	1.4
-681K	680 µH**	±10%	20	0.796	1.6	1.6
-821K	820 µH**	±10%	20	0.796	1.5	1.8
-102K	1000 µH**	±10%	50	0.252	1.3	2.9
SERIES 4564 FERRITE CORE						
-101K	0.10 mH	±10%	80	0.796	5.3	2.0
-121K	0.12 mH	±10%	80	0.796	4.5	2.0
-151K	0.15 mH	±10%	80	0.796	3.8	2.0
-181K	0.18 mH	±10%	80	0.796	3.3	3.0
-221K	0.22 mH	±10%	80	0.796	2.9	3.0
-271K	0.27 mH	±10%	80	0.796	2.6	3.0
-331K	0.33 mH	±10%	80	0.796	2.3	4.0
-391K	0.39 mH	±10%	80	0.796	2.1	4.0
-471K	0.47 mH	±10%	80	0.796	1.9	4.0
-561K	0.56 mH	±10%	80	0.796	1.7	4.0
-681K	0.68 mH	±10%	80	0.796	1.6	4.0
-821K	0.82 mH	±10%	80	0.796	1.4	6.0
-102K	1.00 mH	±10%	90	0.252	1.3	6.0
-122K	1.20 mH	±10%	90	0.252	1.2	9.0
-152K	1.50 mH	±10%	90	0.252	1.1	9.0
-182K	1.80 mH	±10%	90	0.252	1.0	9.0
-222K	2.20 mH	±10%	90	0.252	0.9	13.0
-272K	2.70 mH	±10%	90	0.252	0.8	13.0
-332K	3.30 mH	±10%	90	0.252	0.7	13.0
-392K	3.90 mH	±10%	90	0.252	0.7	13.0
-472K	4.70 mH	±10%	90	0.252	0.6	18.0
-562K	5.60 mH	±10%	90	0.252	0.6	18.0
-682K	6.80 mH	±10%	90	0.252	0.5	26.0
-822K	8.20 mH	±10%	90	0.252	0.5	26.0
-103K	10.0 mH	±10%	100	0.0796	0.4	40.0
-123K	12.0 mH	±10%	100	0.0796	0.4	40.0
-153K	15.0 mH	±10%	100	0.0796	0.4	60.0
-183K	18.0 mH	±10%	100	0.0796	0.3	60.0
-223K	22.0 mH	±10%	100	0.0796	0.3	80.0
-273K	27.0 mH	±10%	100	0.0796	0.2	80.0
-333K	33.0 mH	±10%	100	0.0796	0.2	80.0

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)