


CDBT-54/S/C/A-G

Reverse Voltage: 30 Volts

Forward Current: 200 mA

RoHS Device




Features

- Design for mounting on small surface.
- High speed switching application, circuit protection.
- Low forward voltage drop.


Mechanical data

- Case: SOT-23, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Approx. weight: 0.008 grams


Circuit diagram




CDBT-54-G




CDBT-54S-G



CDBT-54C-G



CDBT-54A-G

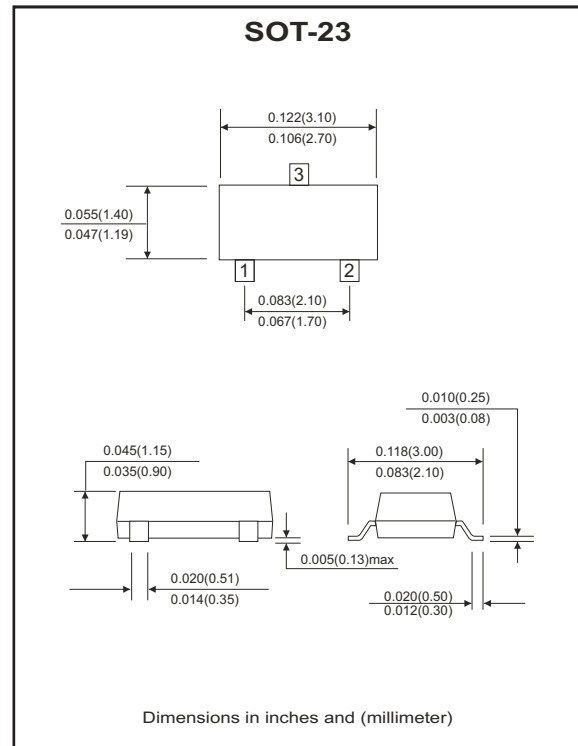

Maximum Ratings and Electrical Characteristics

(at Ta=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Value	Units
Repetitive peak reverse voltage	V_{RRM}		30	V
Reverse voltage	V_R		30	V
Forward current	I_F		200	mA
Peak surge forward current	I_{FSM}	$T < 1.0$ sec	600	mA
Power dissipation	P_D		225	mW
Maximum forward voltage	V_F	$@I_F = 0.1$ mA $@I_F = 1$ mA $@I_F = 10$ mA $@I_F = 30$ mA $@I_F = 100$ mA	0.24 0.32 0.40 0.50 1.00	V
Maximum reverse current	I_R	$@V_R = 25$ V	2	μ A
Maximum reverse recovery time	T_{rr}	$I_F = I_R = 10$ mA, $R_L = 100\Omega$	5	nS
Maximum diode capacitance	C_J	$V_R = 1$ V, $f = 1.0$ MHz	10	pF
Maximum junction temperature	T_J		125	°C
Storage temperature	T_{STG}		-55 to +125	°C

RATING AND CHARACTERISTIC CURVES (CDBT-54/S/C/A-G)

Fig.1- Forward characteristics

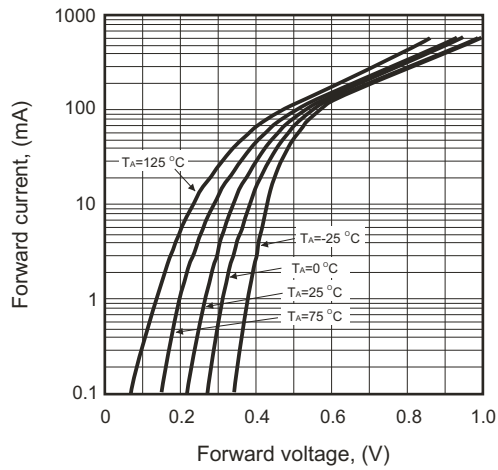


Fig.2- Reverse characteristics

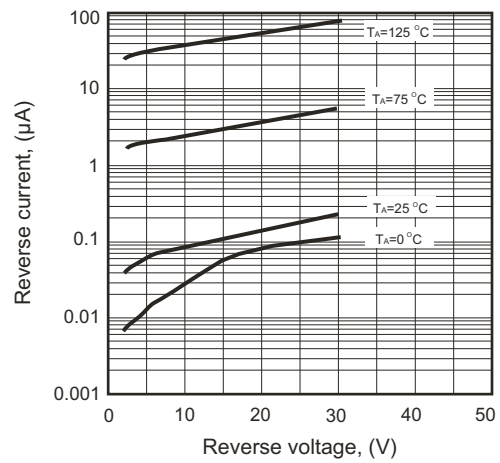


Fig.3- Capacitance between terminals characteristics




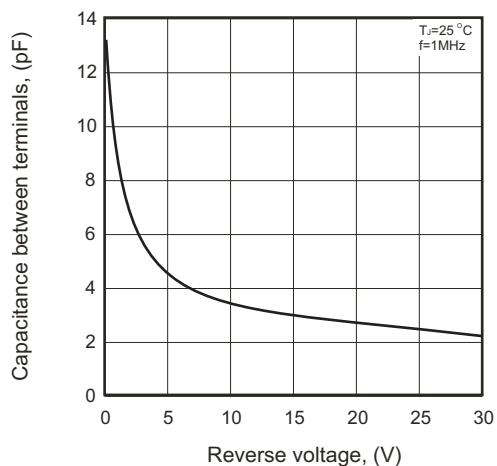


Fig.4- Power derating curve

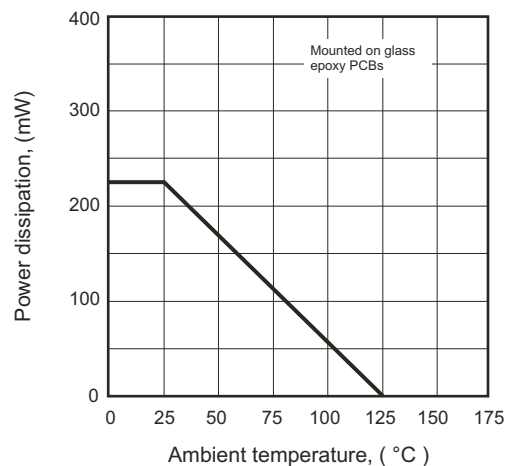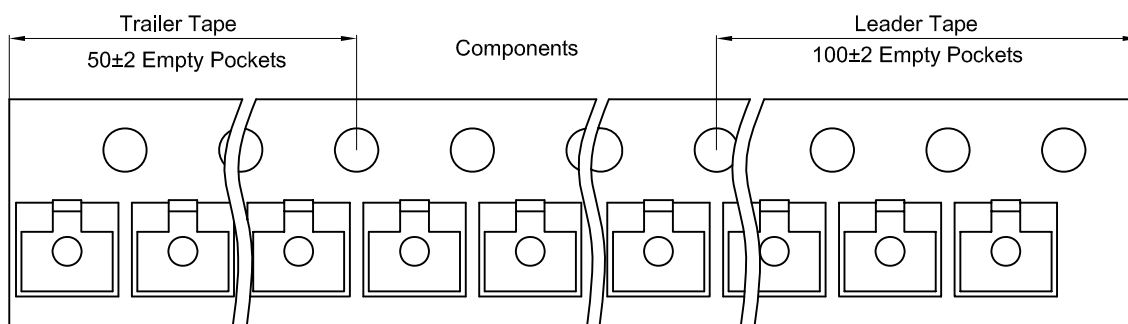

Reel Taping Specification

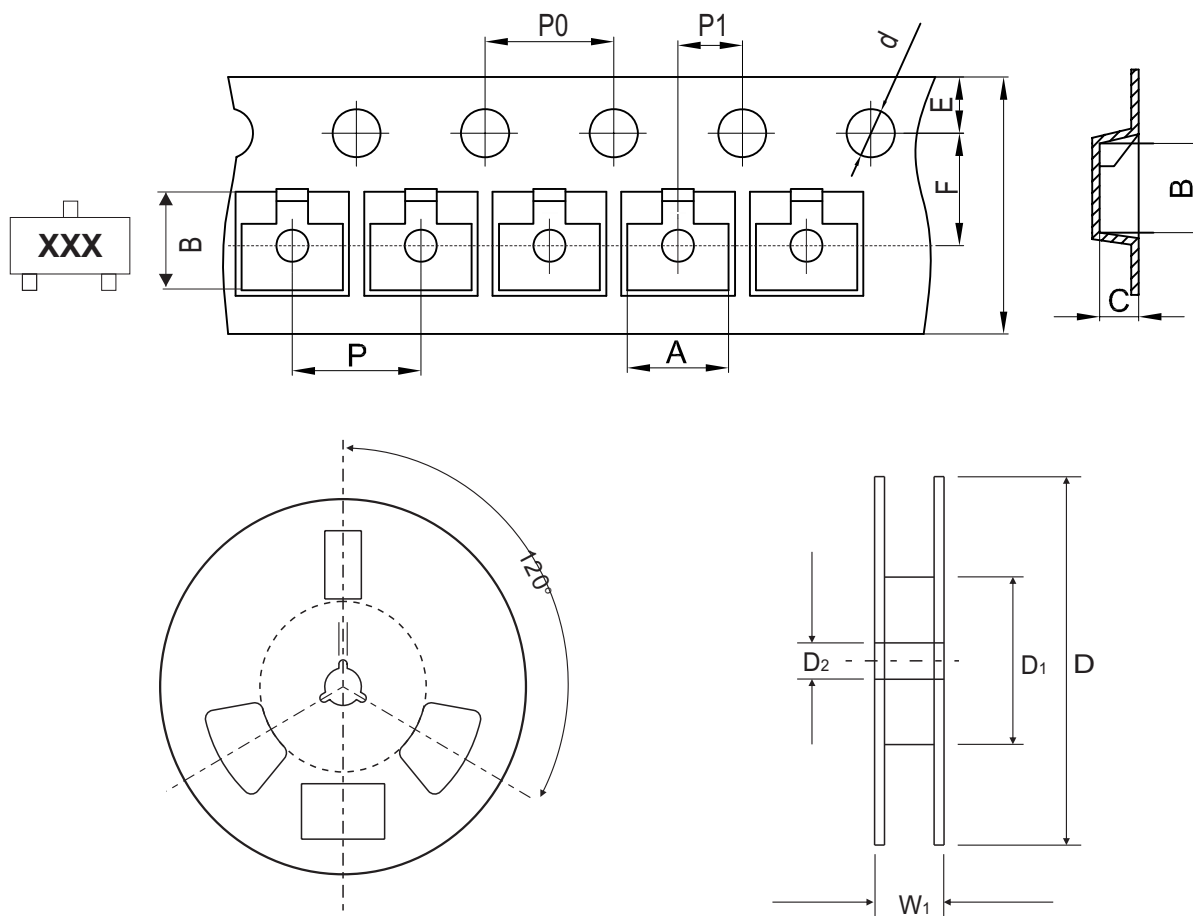


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 / - 0.10	12.30 ± 1.0
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 + 0.012 / - 0.004	0.484 ± 0.039

Marking Code


Part Number	Marking Code	
CDBT-54-G	KL1	JV3
CDBT-54A-G	KL2	B6
CDBT-54C-G	KL3	5C
CDBT-54S-G	KL4	LD3



xx/xxx = Product type marking code

Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	1.90	0.075
C	2.02	0.080
D	2.82	0.111
E	0.80	0.031

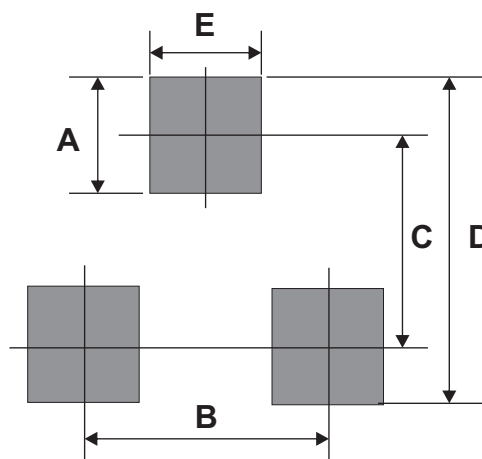

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com