

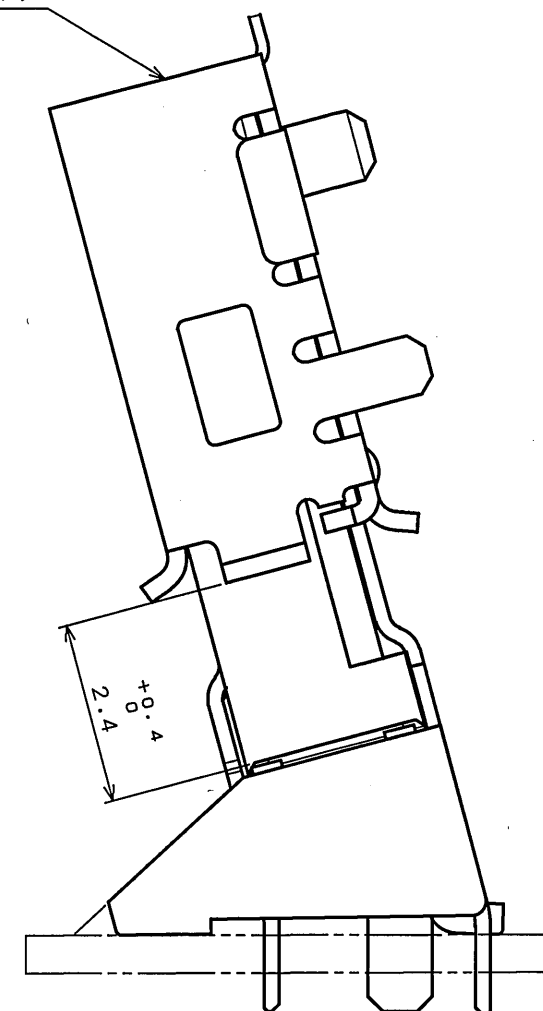

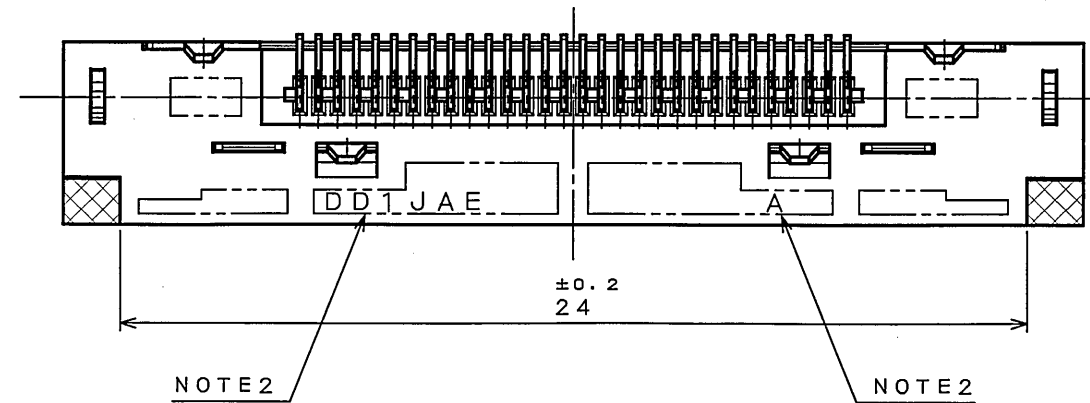
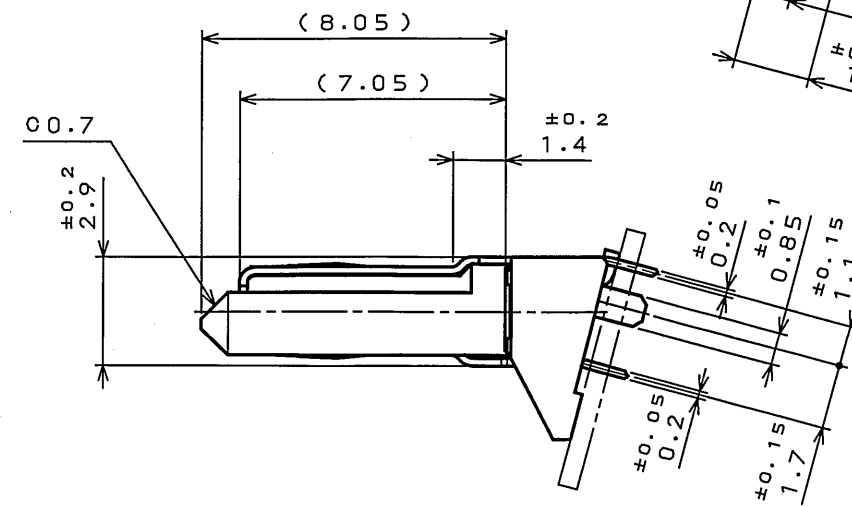


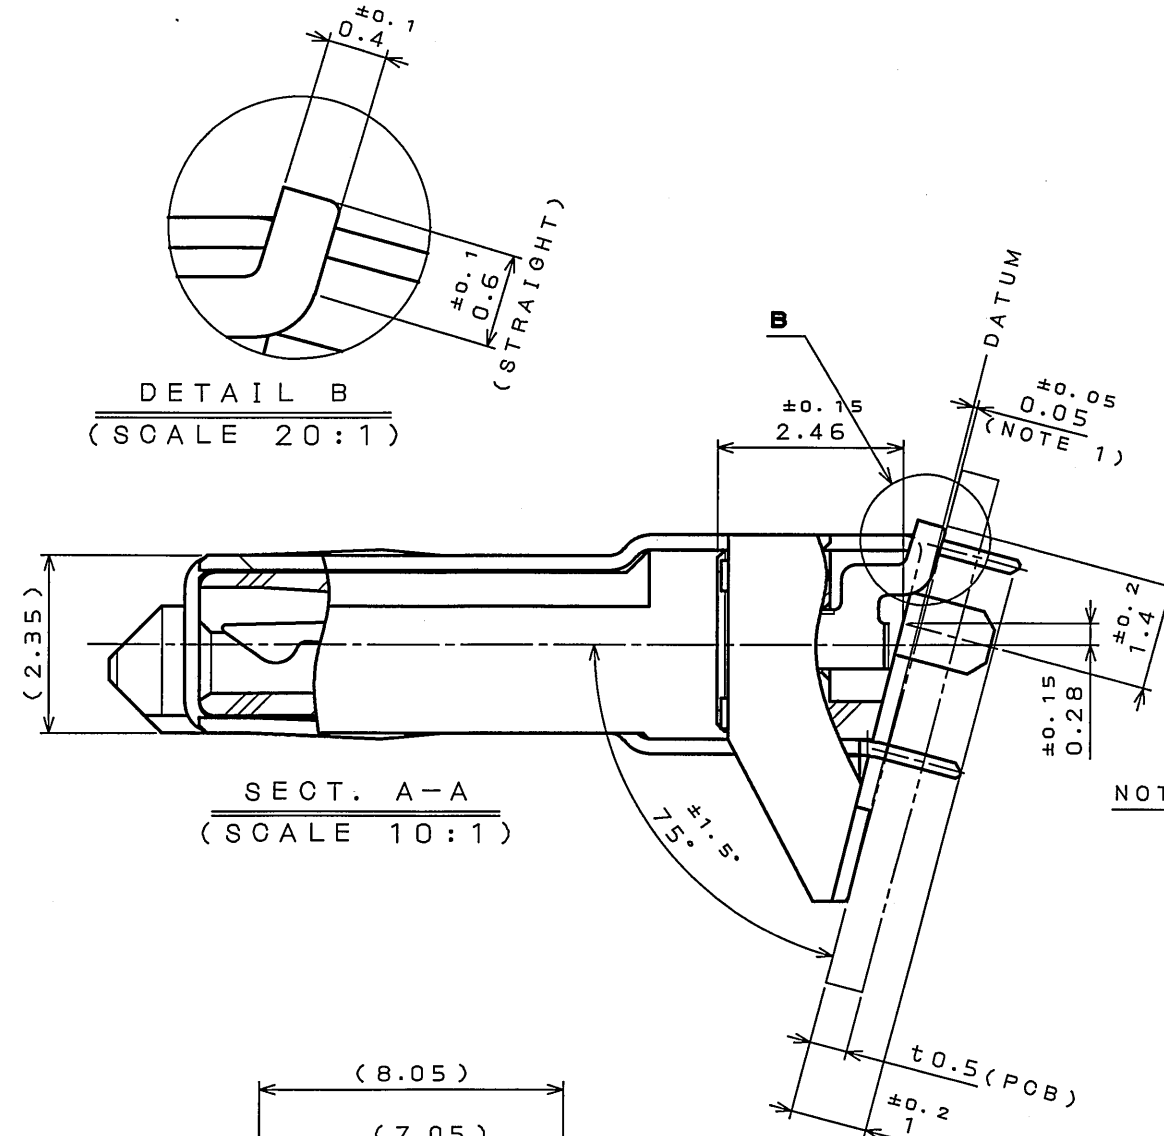

注1. 端子寸法は ± 0.05 であり公差内におけるバラツキ（1コネクタ内のMAX値とMIN値の差）は0.1以下とする。

4	THROUGH HOLE PLATE	2	COPPER ALLOY	NICKEL PLATING THROUGH HOLE AREA:TIN PLATING	
3	SHELL	1	STAINLESS STEEL	NICKEL PLATING THROUGH HOLE AREA:TIN PLATING	
2	INSULATOR	1	9T NYLON	BLACK	UL94 V-0
1	CONTACT	30	COPPER ALLOY	CONTACT AREA:GOLD OVER NICKEL BMT AREA:GOLD FLASH OVER NICKEL	GOLD:0.1μm MIN GOLD FLASH:0.03~0.1μm
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書 (SPECIFICATION) JACS-3285		第1版 (ORIGINAL DATE) 12.Nov.2004		尺 度 (SCALE) S: 1	シリーズ (SERIES) DD1
製造 DR.		担当 OHK. Y.KUROKI		名称 (TITLE) DD1B030VA1	
公差 (GENERAL TOLERANCE)		查閱 APPD.		 JAE ELECTRONICS INDUSTRY, LTD.	
寸法 (DIMENSION)		承認 APPD. G.HAGA			
角度 (ANGLES)					
. ± .X ± .XX ± .XXX ±		X° ± X°X' ±			
				質量 (MASS)	
				図面番号 (DRAWING NO.) SJ102068	

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com