

YXF SERIES


105°C Long Life, Low Impedance

◆FEATURES

- Load Life : 105°C 4000~10000 hours.
- Prescribe Impedance value at 100 kHz.
- RoHS compliance.

◆SPECIFICATIONS

Items	Characteristics																																																					
Category Temperature Range	-40~+105℃																																																					
Rated Voltage Range	6.3~100Vdc																																																					
Capacitance Tolerance	±20% (20℃,120Hz)																																																					
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2 minutes) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)																																																					
(tanδ) Dissipation Factor(MAX)	<table><tr><td>Rated Voltage (Vdc)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>tanδ</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td><td>0.08</td></tr></table> (20℃,120Hz) When capacitance is over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF.										Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	100	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																										
Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	100																																														
tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																																														
Endurance	After applying rated voltage with rated ripple current for specified time at 105℃, the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td colspan="9">Within ±25% of the initial value.</td></tr><tr><td>Dissipation Factor</td><td colspan="9">Not more than 200% of the specified value.</td></tr><tr><td>Leakage Current</td><td colspan="9">Not more than the specified value.</td></tr></table> <table><tr><td rowspan="2">Case Size</td><td colspan="2">Life Time (hrs)</td></tr><tr><td>6.3~10Vdc</td><td>16~100Vdc</td></tr><tr><td>φD≤6.3</td><td>4000</td><td>5000</td></tr><tr><td>φD=8,10</td><td>6000</td><td>7000</td></tr><tr><td>φD≥12.5</td><td>8000</td><td>10000</td></tr></table>										Capacitance Change	Within ±25% of the initial value.									Dissipation Factor	Not more than 200% of the specified value.									Leakage Current	Not more than the specified value.									Case Size	Life Time (hrs)		6.3~10Vdc	16~100Vdc	φD≤6.3	4000	5000	φD=8,10	6000	7000	φD≥12.5	8000	10000
Capacitance Change	Within ±25% of the initial value.																																																					
Dissipation Factor	Not more than 200% of the specified value.																																																					
Leakage Current	Not more than the specified value.																																																					
Case Size	Life Time (hrs)																																																					
	6.3~10Vdc	16~100Vdc																																																				
φD≤6.3	4000	5000																																																				
φD=8,10	6000	7000																																																				
φD≥12.5	8000	10000																																																				
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><td>Rated Voltage (Vdc)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(20℃)</td><td>8</td><td>6</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table> (120Hz)										Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	100	Z(-25℃)/Z(20℃)	4	3	2	2	2	2	2	2	Z(-40℃)/Z(20℃)	8	6	4	3	3	3	3	3																	
Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	100																																														
Z(-25℃)/Z(20℃)	4	3	2	2	2	2	2	2																																														
Z(-40℃)/Z(20℃)	8	6	4	3	3	3	3	3																																														

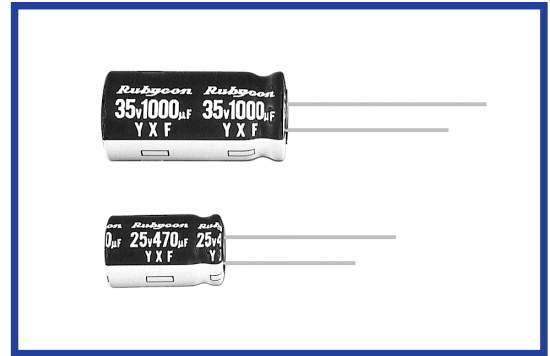


◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)		120	1k	10k	100k≤
Coefficient	1 μF	0.35	0.60	0.80	1.00
	2.2~10 μF	0.42	0.60	0.80	1.00
	22~33 μF	0.55	0.75	0.90	1.00
	47~330 μF	0.70	0.85	0.95	1.00
	470~1000 μF	0.75	0.90	0.98	1.00
	2200~15000 μF	0.80	0.95	1.00	1.00

◆DIMENSIONS

(mm)

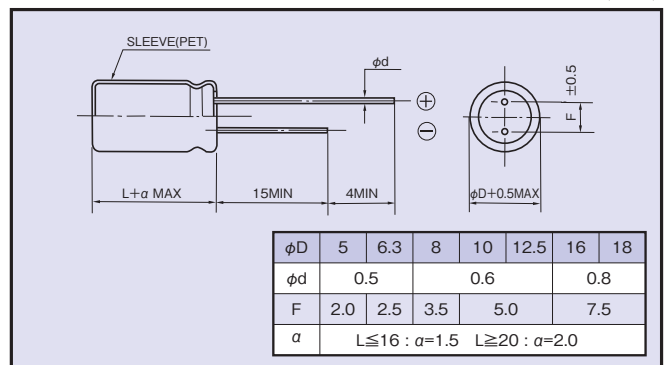

◆OPTION

	Code
PET Sleeve	EFC

◆PART NUMBER

	YXF		M			DxL
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)	
				20°C, 100kHz	-10°C, 100kHz
6.3	100	5×11	150	0.90	3.6
	220	6.3×11	250	0.40	1.6
	330	6.3×11	250	0.40	1.6
	470	8×11.5	400	0.25	1.0
	1000	10×12.5	580	0.16	0.65
	2200	12.5×20	1300	0.062	0.21
	3300	12.5×20	1300	0.062	0.21
	4700	16×25	1850	0.034	0.096
	6800	16×25	1850	0.034	0.096
	10000	16×31.5	2000	0.029	0.087
	15000	18×35.5	2200	0.025	0.058
10	100	5×11	150	0.90	3.6
	220	6.3×11	250	0.40	1.6
	330	8×11.5	400	0.25	1.0
	470	8×11.5	400	0.25	1.0
	1000	10×16	770	0.12	0.46
	2200	12.5×20	1300	0.062	0.21
	3300	12.5×25	1650	0.048	0.16
	4700	16×25	1850	0.034	0.096
	6800	16×31.5	2000	0.029	0.087
	10000	18×35.5	2200	0.025	0.058
16	47	5×11	150	0.90	3.6
	100	6.3×11	250	0.40	1.6
	220	8×11.5	400	0.25	1.0
	330	8×11.5	400	0.25	1.0
	470	10×12.5	580	0.16	0.65
	1000	10×20	1050	0.078	0.30
	2200	12.5×25	1650	0.048	0.16
	3300	16×25	1850	0.034	0.096
	4700	16×31.5	2000	0.029	0.087
	6800	18×35.5	2200	0.025	0.058
25	33	5×11	150	0.90	3.6
	47	5×11	150	0.90	3.6
	100	6.3×11	250	0.40	1.6
	220	8×11.5	400	0.25	1.0
	330	10×12.5	580	0.16	0.65
	470	10×16	770	0.12	0.46
	1000	12.5×20	1300	0.062	0.21
	2200	16×25	1850	0.034	0.096
	3300	16×31.5	2000	0.029	0.087
	4700	18×35.5	2200	0.025	0.058
35	33	5×11	150	0.90	3.6
	47	6.3×11	250	0.40	1.6
	100	8×11.5	400	0.25	1.0
	220	10×12.5	580	0.16	0.65
	330	10×16	770	0.12	0.46
	470	10×20	1050	0.078	0.30
	1000	12.5×25	1650	0.048	0.16
	2200	16×31.5	2000	0.029	0.087
	3300	18×35.5	2200	0.025	0.058

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)	
				20°C, 100kHz	-10°C, 100kHz
50	1	5×11	30	4.0	8.0
	2.2	5×11	43	2.5	6.0
	3.3	5×11	53	2.2	5.6
	4.7	5×11	88	1.9	5.0
	10	5×11	100	1.5	4.0
	22	5×11	150	0.90	3.6
	33	6.3×11	250	0.40	1.6
	47	6.3×11	250	0.40	1.6
	100	8×11.5	400	0.25	1.0
	220	10×16	770	0.12	0.46
	330	10×20	1050	0.078	0.30
	470	12.5×20	1300	0.062	0.21
	1000	16×25	1850	0.034	0.096
	2200	18×35.5	2200	0.025	0.058
63	10	5×11	87	2.3	9.3
	22	6.3×11	140	1.3	5.2
	33	6.3×11	140	1.2	5.0
	47	8×11.5	210	0.63	2.8
	100	10×12.5	300	0.43	1.8
	220	10×20	520	0.21	0.84
	330	12.5×20	660	0.16	0.64
	470	12.5×25	750	0.12	0.45
	1000	16×31.5	1390	0.054	0.20
100	1	5×11	20	4.5	15.0
	2.2	5×11	30	3.0	13.0
	3.3	5×11	40	2.7	11.0
	4.7	5×11	65	2.5	10.0
	10	6.3×11	140	1.2	5.0
	22	8×11.5	160	0.63	2.8
	33	10×12.5	230	0.43	1.8
	47	10×16	290	0.31	1.5
	100	12.5×20	430	0.16	0.64
	220	16×25	900	0.073	0.27
	330	16×25	900	0.073	0.27

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com