

## DRR-DTH/DRT-DTH Features and Benefits



### Features

- Changeover switch with 39.67mm x 5.53mm (1.562" x 0.21") glass envelope
- Capable of carrying up to 3 Amps
- Maximum contact rating up to 50 Watts
- Minimum voltage breakdown 1200 Vdc
- 10<sup>9</sup> Ohms insulation resistance
- Available sensitivity range 50-80 AT


### Benefits

- Hermetically sealed switch contacts are not effected by and have no effect on their external environment
- Can be used as changeover or normally closed contact
- Capable of switching European mains voltage
- Low, stable contact resistance
- Zero operating power required for contact closure
- Fit and forget durability

### Applications

- Security
- Limit switching
- Industrial safety applications
- White goods applications
- Automotive applications

## DIMENSIONS (in) mm

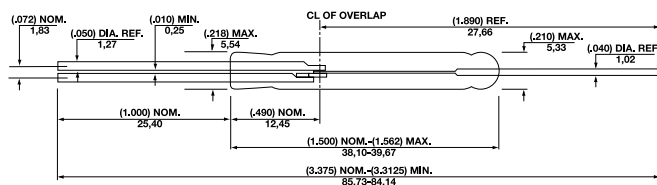

Switch Type		DRR-DTH	DRT-DTH *
Contact Form		C	C

### ELECTRICAL RATINGS

Contact Rating (2)		Watt - max.	30	50
Voltage	Switching	Vdc - max.	500	500
	Breakdown	Vdc - min.	1200	1000
Current	Switching	A - max.	0.5	1.5
	Carry	A - max.	3.0	2.0
Resistance	Contact, Initial	Ω - max.	0.125	0.500 (7)
	Insulation	Ω - min.	10 <sup>9</sup>	10 <sup>9</sup>
Capacitance	Contact	pF - typ.	2.0	2.0
Temperature	Operating	°C	-20 to +125	-20 to +125
	Storage (6)	°C	-65 to +125	-65 to +125

### OPERATING CHARACTERISTICS

Operate Time (3)		ms - max.	4.5	5.5
Release Time (3)		ms - max.	7.0	8.0
Shock	11ms ½ sine wave	G - max.	10	10
Vibration	50-2000 Hertz	G - max.	15	15
Resonant Frequency		Hz - typ.	2750	2750

### MAGNETIC CHARACTERISTICS

Pull-In Range (4)		Ampere Turns	50-80	50-80
Rating Sensitivity (5)		Ampere Turns	60	60
Test Coil			L4988	L4988

- Notes
- 1) For details on electrical specifications, contact Hamlin.
  - 2) Contact rating-Product of the switching voltage and current should never exceed the wattage rating.  
Contact Hamlin for additional load/life information.
  - 3) Operate/Release Time-per EIA/NARM RS421A, diode suppressed coil.

- 4) Pull in Range-Contact Hamlin for tolerances available within this range.
- 5) Rating Sensitivity-The value at which contact ratings and operating characteristics are determined. Derating may be required below this value.
- 6) Storage Temperature-Long time exposure at elevated temperature may degrade solderability of the leads.
- 7) Contact resistance measured at 36 Vdc, 100 ma, switched wet.

**USA** Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com  
**UK** Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com  
**Germany** Tel: +49 (0) 6142 923920 • Fax: +49 (0) 6142 923921 • Email: sales.de@hamlin.com  
**France** Tel: +33 (0) 1 6047 3000 • Fax: +33 (0) 1 6015 9136 • Email: sales.fr@hamlin.com

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
Email       amall@ameya360.com  
QQ         800077892  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
Email       mkt@ameya360.com